MOTOROLA
Semiconductor Products Inc.

MEK6800D2
MANUAL

Circuit diagrams external to Motorola products are included as a means of illustrating typical Microprocessor applications; consequently, complete information sufficient for construction purposes is not necessarily given. The information in this manual has been carefully checked and is believed to be entirely reliable. However, no responsibility is assumed for inaccuracies. Furthermore, such information does not convey to the purchaser of the semiconductor devices described any license under the patent rights of Motorola Inc. or others.

Motorola reserves the right to change specifications without notice.

EXORciser, JBUG and MINIbug are trademarks of Motorola Inc.

TABLE OF CONTENTS

CHAPTER 1
INTRODUCTION

1-1   GENERAL DESCRIPTION AND CAPABILITY

This manual provides a general description and operating instructions for the Motorola MEK6800D2 Evaluation Kit II. The Kit, when assembled, is a fully functional microcomputer system based on the MC6800 Microprocessing Unit (MPU) and its family of associated memory and I/O devices. The family is described in the *M6800 Microcomputer System Design Data* book (included with the Kit) and in the *M6800 Microprocessor Applications Manual*. Detailed programming information is included in the *M6800 Programming Reference Manual*.

The MEK6800D2 is designed to provide a completely self-contained method for evaluating the characteristics of the M6800 family. The standard Kit includes the following devices:

Qty.	Device
1	MC6800 MPU
1	MCM6830 ROM with JBUG Monitor (SCM44520P)
3	MCM6810 RAM (128 x 8)
2	MC6820 Peripheral Interface Adapter (PIA)
1	MC6850 Asynchronous Communications Interface Adapter (ACIA)
1	MC6871B Clock Generator

As assembled Kit is shown in Figure 1-1-1 (all components shown are included with the standard Kit.)

The Microcomputer Module printed circuit board is preengineered to accept the following additional components for expanding its capability:

Qty.	Device
2	MCM6810 RAM (128 x 8)
2	MCM68708 EPROM (Equivalent to 2708)
3	MC8T97 Buffer
2	MC8T26 Bidirectional Buffer

The expansion capability provides for a variety of user operating modes.

The integral Keyboard/Display Module can be used in conjunction with the JBUG monitor program for entering and debugging user programs. Programs can also be loaded and dumped via the Audio Cassette Interface. The Keyboard, Display and Audio Cassette circuitry are on a separate printed circuit board so that the ACIA and a second PIA are available if the user has access to an RS-232 or TTY terminal. Wire-wrap space for up to twenty 16-pin DIP packages is available for user designed circuitry on the Microcomputer Module. A user generated terminal control program designed to interface with either the PIA or the ACIA can be entered via the integral keyboard. Alternatively, the Kit will accept (in place of JBUG) the Motorola MINIbug II monitor program. MINIbug II has monitor and diagnostic capabilities similar to JBUG but is intended for use with RS-232 and TTY type terminals. (See Appendix E of the *Programming Reference Manual* included in the Kit.)
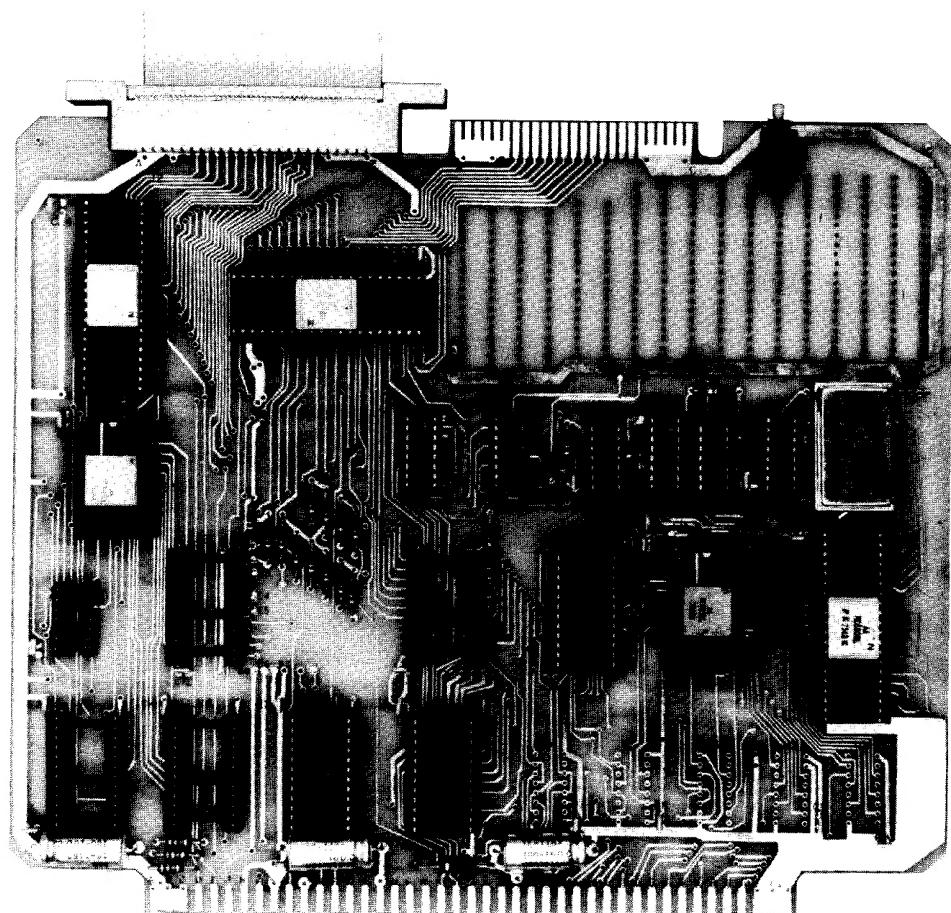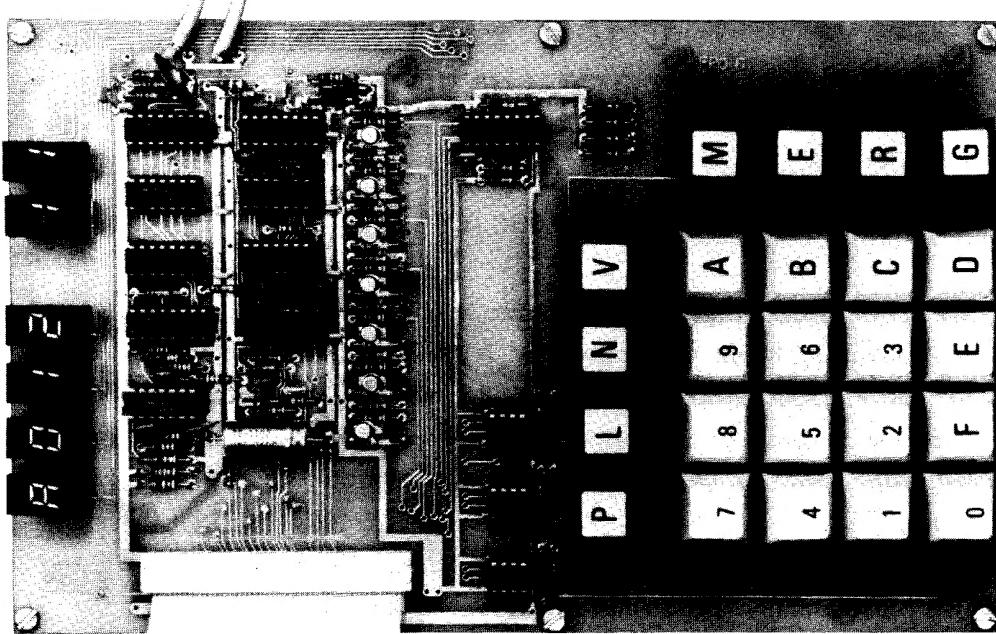
FIGURE 1-1-1.

The Kit also permits several different memory configurations. The two MCM6810 128 x 8 RAMs provided with the standard Kit will accommodate programs of up to 256 bytes in length (the third MCM6810 is reserved for use by the monitor program). Addition of the two additional optional RAMs expands the capability to 512 bytes. Strapping options for the additional ROM sockets permits any of the following combinations:

1024 bytes in 512 x 8 bit PROMs (MCM7641)

2048 bytes in 1024 x 8 bit EPROMs (MCM68708)

2048 bytes in 1024 x 8 bit Mask-Programmed ROMs (MCM68308 — same pin-out as MCM68708)

4096 bytes in 2048 x 8 bit Mask-Programmed ROMs (MCM68316 — same pin-out as MCM68708 except EPROM programming pin is used as additional addressing pin.)

The general memory organization of the Kit is shown in Figure 1-1-2.

Adding the optional buffers in the spaces provided upgrades the Kit to EXORciser-compatible status; hence, all the EXORciser I/O and Memory modules (see included data sheets) can also be used with the Kit. For example, addition of MINIbug II, an 8K Memory board, and the EXORciser's Resident Editor/ Assembler to the Microcomputer Module creates a complete development/prototyping tool.
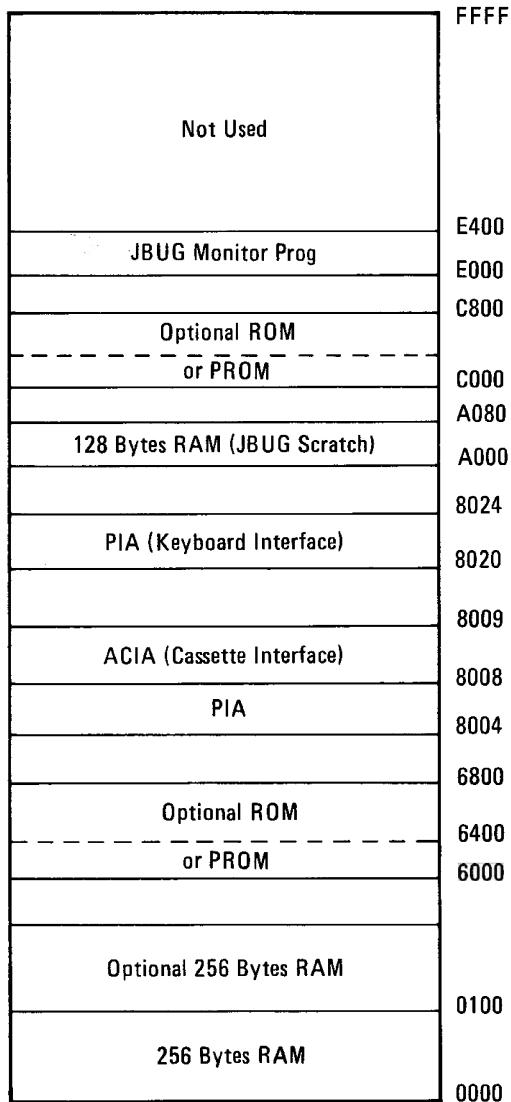
FIGURE 1-1-2. Memory Map for MEK6800D2

The Kit can be assembled by referring to the assembly diagrams of Figures A2-a and A2-b (Appendix 2) for component placement. Recommended procedures for the handling of MOS and CMOS integrated circuits are reviewed in Table 1-2-1 and should be followed during assembly. The Kit is completely self-contained and required only the addition of a 5-volt dc power supply. Additional ± 12-volt dc supplies are required only if electrically programmable read only memories (EPROMs) are used or if RS-232 capability is to be added to the Kit. The switches, connectors and display indicators are identified in Figure 1-1-3.

Caution must be exercised to avoid any electrostatic or high-voltage charge from coming in contact with the MOS gate elements. The gate oxide is approximately 1000 to 1200 A thick and can be ruptured by static potentials as small as 80 volts. Most MOS circuits employ various input protective schemes. However, an electrostatic charge may still cause damage to the gate oxide during the finite time required for the protective device to turn on.

The following handling precautions are recommended for MOS circuits:

1. All MOS devices should be stored or transported in conductive material so that all exposed leads are shorted together. MOS devices must not be inserted into conventional plastic foam or plastic trays of the type used for the storage and transportation of other semiconductor devices.

2. All MOS devices should be placed on a grounded bench surface and the operators should ground themselves prior to handling devices. This is done most effectively by having the operator wear a grounded conductive wrist strap.

3. Silk or Nylon clothing should not be worn while handling MOS circuits.

4. Do not insert or remove MOS devices from test sockets with power applied.

5. Check all power supplies to be used for testing MOS devices to be certain no voltage transients are present.

6. When lead straightening or hand soldering is necessary, provide ground straps for the apparatus used.

7. Do not exceed the maximum electrical voltage ratings specified by the manufacturer.

8. Double check test equipment setup for proper polarity of voltage before conducting parametric or functional testing.

9. Cold chambers using CO_2 for cooling should be equipped with baffles, and devices must be contained on or in conductive material.

10. All unused device inputs should be connected to V_{DD} or V_{SS}.

11. All power should be turned off in a system before printed circuit boards containing MOS devices are inserted or removed.

12. All printed circuit boards containing MOS devices should be provided with shorting straps across the edge connector when being carried or transported.

TABLE 1-2-1: MOS Handling Recommendations
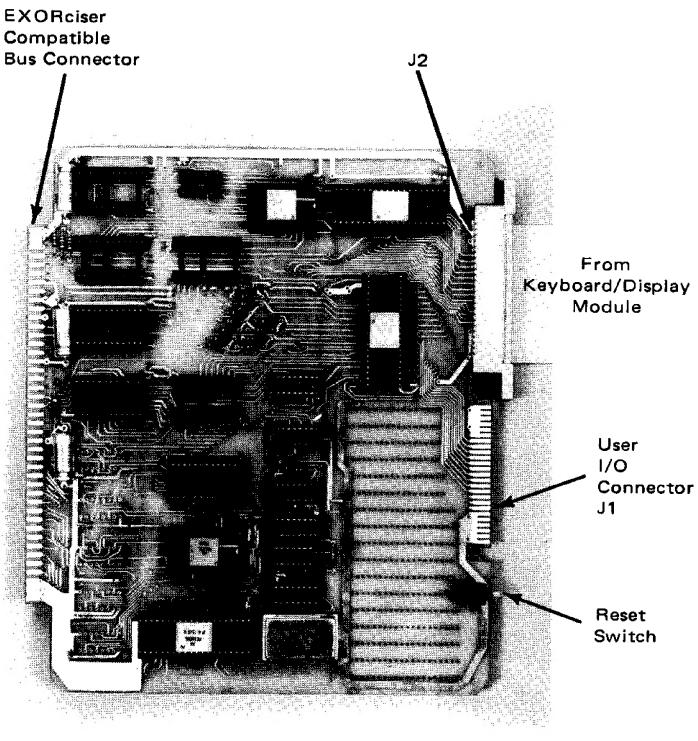
FIGURE 1-1-3a. Microcomputer Module
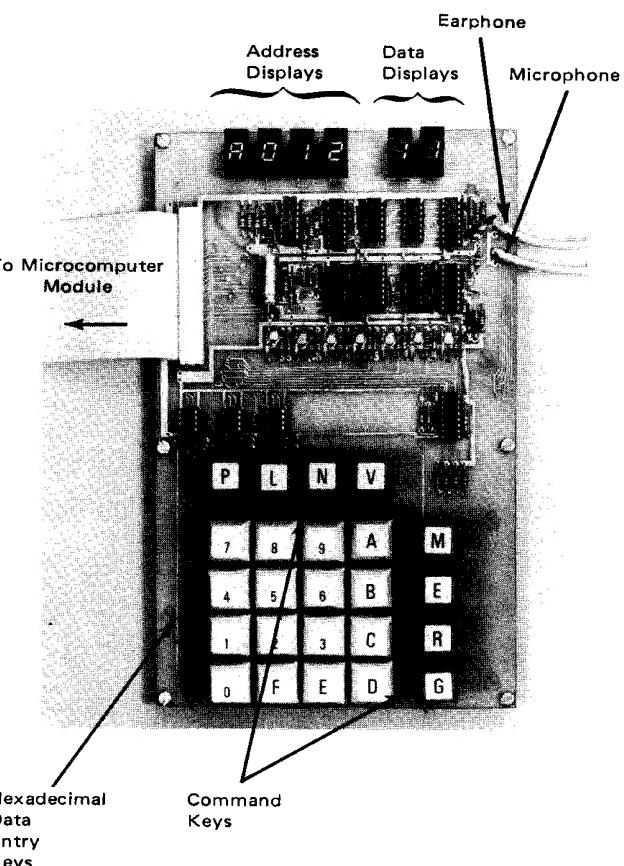
FIGURE 1-1-3b. Keyboard/Display Module

1-2.1   CONSTRUCTION HINTS

The 24-pin socket supplied for the clock must be modified to fit the PC Board. This can be done by removing the protective strips on the bottom of the socket and pulling out unwanted pins from the bottom. The pins that must be removed are 2, 4, 6, 8, 9, 10, 11, 14, 15, 16, 17, 19, 21, and 23.

The Keyboard has 6 pre-drilled holes for use with standoffs or machine screws to support the board while in use. It is recommended that the board be supported above the bench a minimum of 1/4 inch to prevent accidentally shorting conductors on the bottom of the board.

When inserting CMOS devices, it is recommended that a low wattage soldering iron with a grounded tip be used. This will prevent damaging the part. Another alternative would be using sockets for the parts.

The cable assembly consists of five items.

1. Edge connector   (part no. 3415-0001)
2. Edge connector cover   (part no. 3415)
3. 50 pin PC Board connector   (part no. 3426-0000T)
4. PC Board connector cover   (part no. 3426)
5. Approximately 3 feet of 50 conductor flat cable   (part no. 3365)

The cable may be assembled as follows:

Step 1: Solder the 50-pin PC board connector (3426-0000T) in place on the Keyboard/Display Module.

Step 2: Remove protective liner from the PC Board Connector Cover (3426) by first pressing along length of liner (this will insure good adhesive coverage) and then applying lateral thumb pressure on liner to displace it enough to be peeled off.

Step 3: Press deeply ribbed side of cable (3365) into alignment grooves of cover, positioning it as required in step 4. Check visually to insure that the cable is aligned in cover grooves and is even with the edge of the connector.

Step 4: Place cap and cable over PC Board connector with the cable running away from the Keyboard/Display Module with the red stripe corresponding to pin 1 of the connector. Then press the assembly together using a bench vise.

Step 5: Repeat steps 2 and 3 with edge connector and cap on the other end of the cable, keeping the red conductor aligned with pin 1 of the edge connector. Press this assembly together using the vise.

Step 6: The female edge connector will now mate with the male edge connector (J2) on the Microcomputer Module. The female conductor labled "1" should align with the male conductor labled "A". (The cable "approaches" the back of the Microcomputer Module.)

1-3   START-UP PROCEDURE

Connect the cable attached to the Keyboard/Display Module to connector J2 on the Microcomputer Module. Apply 5-volt dc power. Pushing the reset switch on the Microcomputer Module should now cause the JBUG prompt symbol, "dash", to be displayed in the left-most display indicator on the Keyboard/Display Module. The remaining five displays will be blanked. The JBUG control and monitor program is now in operation and any of the functions described in the next section may be invoked by means of the data and command keys on the Keyboard/Display Module.

1-4   OPERATING PROCEDURES

The Keyboard/Display Module, in conjunction with JBUG, provides a means of examining operation of the Microcomputer Module and entering and trouble-shooting programs. The Keypad has sixteen keys labeled 0-F for entry of hexadecimal data and eight keys for commanding the following functions:

M — Examine and Change Memory
E — Escape (Abort) from Operation in Progress
R — Examine Contents of MPU Registers P, X, A, B, CC, S
G — Go to Specified Program and Begin Execution of Designated Program
P — Punch Data from Memory to Magnetic Tape
L — Load Memory from Magnetic Tape
N — Trace One Instruction
V — Set (and Remove) Breakpoints

Operating procedures for each of these functions are described in the following paragraphs. The display should be showing the prompt "dash" before any command is invoked.

1-4.1   MEMORY EXAMINE AND CHANGE (M)

This function permits examination and, if necessary, change of memory locations. A map of the MC6800 instructions is included as Table 1-4.1-1 and is useful in translating memory data to instruction mnemonics.

Open the memory location to be examined by entering the address (as 4-digits of hex via the hex keypad) followed by closure of the M key (hhhhM). The display will now show the address that was entered in its group of four displays on the left and the contents in the two on the right. The user at this point has three options: (1) Leave this location unchanged and move to the next location by closing the G key. The new address and its data would then be displayed. (2) Change the data by simply entering the new data via the hex keypad (hh). In this case the display would then be showing the new data that was entered. In the event that an attempt is made to change Read Only Memory (ROM), the display will continue to show the original data. (3) Close the Memory Examine function by means of the E key. Closure of the E key will return operation to the monitor and the prompt will again be displayed.

1-4.2   ESCAPE (ABORT)

This function provides an orderly exit from the other functions and/or user programs. Examples of its use are included in the accompanying descriptions of the other functions.

1-4.3   REGISTER DISPLAY (R)

This function permits examination of the MPU's registers and may be invoked at any time the JBUG prompt is being displayed by closing the R key. Following closure of R, the display will show a 4-digit hex value, the present contents of the Program Counter. The remaining registers may now be examined by sequencing with the G key and will appear in the following order: Index Register, Accumulator A, Accumulator B, Condition Code Register, Stack Pointer.[1]

This display is circular, i.e., a G key closure following display of the Stack Pointer will cause the Program Counter to be displayed again. The E key may be used to escape back to the monitor at any point in the display sequence. If required the contents of any register can be changed by using the Memory Change function. The monitor executed an interrupt sequence when R was invoked. In servicing an interrupt, the MC6800 saves its registers on a stack in memory (it is these memory locations that the R function "examines"). On exit from the R interrupt service routine, the MPU retrieves these values and reloads its registers; hence if the data on the stack is changed with the M function, the new data will go into the MPU. The following locations are used to stack the registers:

$A008[2] — High order byte of Stack Pointer
$A009 — Low order byte of Stack Pointer
S + 1 — Condition Code Register
S + 2 — Accumulator B
S + 3 — Accumulator A
S + 4 — High order byte of Index Register

---

[1]It is a characteristic of the display routine that the value displayed for the Stack Pointer is seven less than the actual value.
[2]In this manual, hexadecimal data is identified by preceeding it with a dollar sign symbol, $.

MSB\LSB	0	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F
0	*	NOP (INH)	*	*	*	*	TAP (INH)	TPA (INH)	INX (INH)	DEX (INH)	CLV (INH)	SEV (INH)	CLC (INH)	SEC (INH)	CLI (INH)	SEI (INH)
1	SBA	CBA	*	*	*	*	TAB (INH)	TBA (INH)	*	DAA (INH)	*	ABA (INH)	*	*	*	*
2	BRA (REL)		BHI (REL)	BLS (REL)	BCC (REL)	BCS (REL)	BNE (REL)	BEQ (REL)	BVC (REL)	BVS (REL)	BPL (REL)	BMI (REL)	BGE (REL)	BLT (REL)	BGT (REL)	BLE (REL)
3	TSX (INH)	INS (INH)	PUL (A)	PUL (B)	DES (INH)	TXS (INH)	PSH (A)	PSH (B)	*	RTS (INH)	*	RTI (INH)	*	*	WAI (INH)	SWI (INH)
4	NEG (A)	*	*	COM (A)	LSR (A)	*	ROR (A)	ASR (A)	ASL (A)	ROL (A)	DEC (A)	*	INC (A)	TST (A)	*	CLR (A)
5	NEG (B)	*	*	COM (B)	LSR (B)	*	ROR (B)	ASR (B)	ASL (B)	ROL (B)	DEC (B)	*	INC (B)	TST (B)	*	CLR (B)
6	NEG (IND)	*	*	COM (IND)	LSR (IND)	*	ROR (IND)	ASR (IND)	ASL (IND)	ROL (IND)	DEC (IND)	*	INC (IND)	TST (IND)	JMP (IND)	CLR (IND)
7	NEG (EXT)	*	*	COM (EXT)	LSR (EXT)	*	ROR (EXT)	ASR (EXT)	ASL (EXT)	ROL (EXT)	DEC (EXT)	*	INC (EXT)	TST (EXT)	JMP (EXT)	CLR (EXT)
8	SUB (A) (IMM)	CMP (A) (IMM)	SBC (A) (IMM)		AND (A) (IMM)	BIT (A) (IMM)	LDA (A) (IMM)	*	EOR (A) (IMM)	ADC (A) (IMM)	ORA (A) (IMM)	ADD (A) (IMM)	CPX (A) (IMM)	BSR (REL)	LDS (IMM)	*
9	SUB (A) (DIR)	CMP (A) (DIR)	SBC (A) (DIR)	*	AND (A) (DIR)	BIT (A) (DIR)	LDA (A) (DIR)	STA (A) (DIR)	EOR (A) (DIR)	ADC (A) (DIR)	ORA (A) (DIR)	ADD (A) (DIR)	CPX (A) (DIR)	*	LDS (DIR)	STS (DIR)
A	SUB (A) (IND)	CMP (A) (IND)	SBC (A) (IND)	*	AND (A) (IND)	BIT (A) (IND)	LDA (A) (IND)	STA (A) (IND)	EOR (A) (IND)	ADC (A) (IND)	ORA (A) (IND)	ADD (A) (IND)	CPX (A) (IND)	JSR (IND)	LDS (IND)	STS (IND)
B	SUB (A) (EXT)	CMP (A) (EXT)	SBC (A) (EXT)	*	AND (A) (EXT)	BIT (A) (EXT)	LDA (A) (EXT)	STA (A) (EXT)	EOR (A) (EXT)	ADC (A) (EXT)	ORA (A) (EXT)	ADD (A) (EXT)	CPX (A) (EXT)	JSR (EXT)	LDS (EXT)	STS (EXT)
C	SUB (B) (IMM)	CMP (B) (IMM)	SBC (B) (IMM)	*	AND (B) (IMM)	BIT (B) (IMM)	LDA (B) (IMM)	*	EOR (B) (IMM)	ADC (B) (IMM)	ORA (B) (IMM)	ADD (B) (IMM)	*	*	LDX (IMM)	*
D	SUB (B) (DIR)	CMP (B) (DIR)	SBC (B) (DIR)	*	AND (B) (DIR)	BIT (B) (DIR)	LDA (B) (DIR)	STA (B) (DIR)	EOR (B) (DIR)	ADC (B) (DIR)	ORA (B) (DIR)	ADD (B) (DIR)	*	*	LDX (B) (DIR)	STX (B) (DIR)
E	SUB (B) (IND)	CMP (B) (IND)	SBC (B) (IND)	*	AND (B) (IND)	BIT (B) (IND)	LDA (B) (IND)	STA (B) (IND)	EOR (B) (IND)	ADC (B) (IND)	ORA (B) (IND)	ADD (B) (IND)	*	*	LDX (IND)	STX (IND)
F	SUB (B) (EXT)	CMP (B) (EXT)	SBC (B) (EXT)	*	AND (B) (EXT)	BIT (B) (EXT)	LDA (B) (EXT)	STA (B) (EXT)	EOR (B) (EXT)	ADC (B) (EXT)	ORA (B) (EXT)	ADD (B) (EXT)	*	*	LDX (EXT)	STX (EXT)

DIR = Direct Addressing Mode
EXT = Extended Addressing Mode
IMM = Immediate Addressing Mode

IND = Index Addressing Mode
INH = Inherent Addressing Mode
REL = Relative Addressing Mode

A = Accumulator A
B = Accumulator B

*Unimplemented Op Code

TABLE 1-4.1-1. M6800 Instruction Map

S + 5 — Low order byte of Index Register

S + 6 — High order byte of Program Counter

S + 7 — Low order byte of Program Counter

where "S" is the current Stack Pointer as saved in $A008 and $A009. Note that it is necessary to exit the R display function and enter the M in order to change register values.

1-4.4   GO TO USER PROGRAM (G)

If the Prompt is being displayed, and assuming that a meaningful program has been previously entered, the MPU can be directed to go execute the program simply by entering the starting address of the program (via the hex keypad) followed by closure of the G key (hhhhG). The resulting blanking of the displays is an indication that the MPU has left the monitor program and is executing the user's program. The MPU will continue executing the user program until either an Escape (E key) is invoked or the program "blows". Control, indicated by the prompt "dash", can normally be obtained with the E key. It is possible that an incorrect program could have caused the monitor's variable data to be modified. In this case, it is necessary to regain control using the reset switch on the Microcomputer Module.

1-4.5   PUNCH FROM MEMORY TO TAPE

The Punch function allows the user to save selected blocks of memory on ordinary audio tape cassettes. Before invoking Punch, the Memory Change function should be used to establish which portion of memory is to be recorded. Using Memory Change, enter the desired starting address into locations $A002 and $A003 (high order byte into $A002, low order byte into $A003). Similarly, enter the high and low order bytes of the desired ending address into $A004 and $A005, respectively. Escape from Memory Change via the E key, thus obtaining the monitor prompt dash. With the audio recorder's microphone input connected to the corresponding point on the Keyboard/Display Module and the prompt present, the Punch function is performed as follows. Position the tape as desired (fully rewound is recommended) and put the recorder in its record mode. Close the P key. The prompt will disappear during the Punch process and then re-appear to indicate that the Punch operation is completed. Typically, the prompt is "off" for over 30 seconds since the recording format specifies that a thirty second header of all ones be recorded ahead of the data. See sections 2-7 and 3-7 for additional details on the recording format.

1-4.6   LOAD FROM TAPE TO MEMORY

The Load function can be used to retrieve from audio magnetic tape data that was recorded using the Punch function described in the preceding section. With the audio recorder's earphone output connected to the corresponding input on the Keyboard/Display Module (and with the monitor prompt present on the display), the Load function is performed as follows. To load the desired record, position the tape at the approximate point from which the Punch was started and then put the recorder into its playback mode. Close the L key. The prompt will disappear, then re-appear when the Load function is completed. After the prompt re-appears, the Memory Examine function can be used to examine locations $A002 and $A003. They will contain the beginning address of the block of data that was just moved into memory. The end address is not recovered by the function, hence the data in locations $A004 and $A005 is not significant during the Load function.

1-4.7   BREAKPOINT INSERTION AND REMOVAL (V)

Because of the difficulty in analyzing operation while a program is executing, it is useful during debug to be able to set breakpoints at selected places in the program. This enables the user to run part of the program, then examine the results before proceeding. The breakpoints are set by entering the hex address of the desired breakpoint followed by a V key closure (hhhhV). This may be repeated up to five times. The breakpoint entry function can be exited after any entry by using the E key. The monitor program will retain all the breakpoints until they are cleared.

If at any time an hhhhV entry is made and the hhhh (hex data) does not appear on the display, there were already five breakpoints stored and the last one was ignored. At any time the prompt is displayed, entry of a V command not preceeded by hex data will cause the current breakpoints to be removed. If a breakpoint is entered and the program is subsequently executed to that point, the display will show the current value of the Program Counter in the four indicators on the left. (This will be the same as the breakpoint address that was inserted.) The right hand two displays will contain the data stored at that location — that is, the operating code. At this point the G key can be used to sequence through the other MPU registers exactly as in the register display function. If it is desirable to proceed on from the breakpoint simply use E (to get the prompt) and then the G key. At this point, the MPU will reload its registers from the stack and continue with the user's program until another breakpoint is encountered or the E key is used again.

1-4.8   TRACE ONE INSTRUCTION (N)

The Trace function permits stepping through a program one instruction at a time. The Trace function can be invoked any time the user program is at a breakpoint or has been aborted with the E key. However, tracing cannot begin from start-up because the trace routine does not know where the starting address is. Therefore, an hhhhV command must be given at least once before Trace can be used.

Enter the Trace function by first setting a breakpoint at the location from which it is desired to trace and then invoking hhhhG to begin program execution. The breakpoint can be set at the very beginning of the program if desired.[3] Following the hhhhG command, the program will run to the breakpoint and stop, displaying the Program Counter as before. If the N key is now closed, the MPU executes the next program instruction and again halts. The display will then show the address of the next instruction (Program Counter) and the operating code located there. The G key can be used to sequence the other registers on to the display as for a breakpoint if desired. The N key can now be used to trace as many instructions as desired.[4]

The Trace function cannot be used directly to trace through user IRQ interrupts. The NMI is higher priority and will cause the IRQ to be ignored. Repeated attempts to execute the Trace command when user IRQ interrupts are active will result in JBUG continuously returning with the same address. See sections 2-6 and 3-8 of this manual and the *M6800 Microprocessor Applications Manual* for additional information.

---

[3]This procedure assumes the program is in RAM since breakpoints are handled by substituting an SWI for the op-code. If the program to be traced is entirely in ROM, use a convenient RAM location to insert a jump to the desired ROM address. Then set a breakpoint at the address of the jump instruction and proceed as above.

[4]It is a characteristic of the Trace function that all breakpoints in effect at the time Trace is invoked will be removed and must be re-installed following exit from Trace.

Interrupt service routines may be traced by setting a breakpoint at the beginning of the service routine. The Go function may then be used to start program execution, allowing a normal entry into the $\overline{IRQ}$ service routine. Once in the service routine, Trace can be used as usual. The E key may be used to exit from Trace at any time.

1-4.9   CALCULATION OF THE OFFSET TO A BRANCH DESTINATION

The instruction format for conditional branch instructions calls for the offset to the destination to be entered immediately following the branch instruction op-code as a signed two's complement number. Mental calculation of the offset is awkward due to the required two's complement format. A short program for making this calculation is included in JBUG (lines 62-70 of the assembly listing included as Appendix 1 of this manual). Use the following procedure with this program:

1. Obtain the prompt "dash" by escaping from the current operation.

2. Find the current value of the stack pointer by entering the Register Display.

3. Exit from Register Display and open memory location S+2, where S is the current value of the stack pointer as obtained in Step 2. S+2 is the location of the current stacked value of Accumulator B. Enter the high order byte of the destination address in this location. Next, enter the low order byte of the destination into Accumulator A in location S+3.

4. Put the high and low order bytes of the branch instruction's op-code address into S+4 and S+5, respectively. This loads the stacked Index Register with the op-code address.

5. Use the "E" key to exit from the Memory Examine/Change function and then enter $E000G to begin executing the program starting at location $E000 in JBUG.

6. The program runs to location $E013 and hits the SWI breakpoint located there. Examine the contents of Accumulators A and B by invoking Register Display and sequencing through the Registers with the G key. The offset, in the correct form for entry in the program, is now in Acc.A. If Acc.B contains $FF, the offset is valid (within the allowed range) and is in the negative direction. If Acc.B contains $00, the offset is valid and in the positive direction. Any other value indicates that the destination is beyond the allowed range.

1-5   OPERATING EXAMPLE

The following example program is suitable for gaining familiarity with the JBUG monitor features. The program adds the five values in locations $10 through $14 using Acc. A and stores the final result in location $15. The intermediate total is kept in Acc. A; Acc. B is used as a counter to count down the loop. The Index Register contains a "pointer" (i.e., X contains the address) of the next location to be added. The program, as follows, contains an error which will be used later to illustrate some of JBUG's features.

In the following listing, the leftmost column contains the memory address where a byte (8 bits) of the program will be stored. The next column contains the machine language op-code and data for a particular

microprocessor instruction. The next four columns contain the mnemonic representation of the program in assembler format.

```
                              *
                              * Add 5 numbers at locations 10-14
                              * Put answer in location 15
                              *
        0020    8E    STRT    LDS    $FF      DEFINE STACK IN USER AREA
        0021    00
        0022    FF
        0023    4F            CLRA            TOTAL # 0
        0024    C6            LDAB   #4       INITIALIZE COUNTER
        0025    04
        0026    CE            LDX    #$10     POINT X TO LOCATION 10
        0027    00
        0028    10
        0029    AB    LOOP    ADDA   O,X      ADD 1 LOCATION TO TOTAL
        002A    00
        002B    08            INX             POINT X TO NEXT LOCATION
        002C    5A            DECB            DONE ALL 5 LOCATIONS?
        002D    26            BNE    LOOP     BRANCH IF NOT.
        002E    FA
        002F    97            STAA   $15      SAVE ANSWER
        0030    15
        0031    3F            SWI             GO TO JBUG
```

A detailed procedure for entering and debugging this program is shown in the following steps.

1. Start Up and Enter the Program in RAM

    A. Turn power on. Push reset button on the main card. JBUG will respond with a ''—''.

    B. Type 0020 followed by the M key. This displays the current contents of location 0020.

    C. Type 8E. This replaces the contents of 0020 with 8E which is the op-code for the first instruction, LDS.

    D. Type G. This steps to the next location (0021) and displays the contents.

    E. Type 00.

    F. Type G.

    G. Type next byte of op-code or operand (FF in this case).

    H. Repeat steps F and G for remaining instructions.

    I. Type E. Abort input function.

2. Verify That the Program Was Entered Correctly

   A. Type 0020M. Location 20 will be displayed.

   B. Type G. Next location will be displayed.

   C. Repeat step B until done, visually verifying data entered in Step 1.

   D. Type E.

3. Enter Data in Locations 10-14

   A. Same as 1 except type 0010M to start the sequence. Any data may be entered; however, for purposes of this example 01, 02, 03, 04, 05 should be entered.

   B. Type E.

4. Verify Data

   A. Repeat step 2 except type 0010M to begin the sequence. Verify that the memory contains the values 01, 02, 03, 04, 05 in sequencial order.

5. Run the Program

   A. Type E to insure no other option is active.

   B. Type 0020G. The program will run down to the "SWI" instruction at location 31 which will cause it to go to JBUG and show 0031 3F on the display.

6. Check the Answer

   A. Type E.

   B. Type 0015M. (The answer is stored in location 15). Note that it says 0A (decimal 10). The correct answer is 0F or decimal 15; therefore, there is a problem in the program as originally defined. The next steps should help isolate the problem and correct it.

7. Breakpoint and Register Display

   A. It might be helpful to see what the program was doing each time it went through the loop. Therefore, set a breakpoint at the beginning of the loop, location 0029. To do this type E, then tye 0029V.

   B. A breakpoint could also be set at location 002F to see the results. Type E. Type 002FV.

   C. JBUG must be told where to begin, so type E and then 0020G. JBUG will run to the breakpoint and then display 0029 AB. At this point the program is suspended just before location 29 and is in JBUG. On detecting this breakpoint, JBUG automatically displays the PC and is in the register display mode.

   D. Type G (Go to next register). The display should read 0010. This is the value of the X Register.

   E. Type G. Display = 00 (A Register).

F. Type G. Display = 04 (B Register).

G. Type G. Display = D0 (Condition Code Register).

H. Type G. Display = 00F8 (Stack pointer). Even though the program set the stack pointer to FF the action of the breakpoint used a software interrupt to store the registers on the stack, thus decrementing it by 7 locations. When JBUG returns to the user's program the stack will return to FF.

I. Type G. Display = 0029 (PC). The register display is circular and steps D through H could be repeated.

J. Type E. Abort the register display portion of the breakpoint. Type G to return to the example program and resume executing. Since the breakpoint at location 0029 is in a loop it will again be the next breakpoint and the display will contain 0029 AB. At this point the registers may be displayed again as per steps D through I. If this were done the A would be seen to contain the partial sum and the B would be decremented. The X Register would be one greater than previously.

K. Type E.

L. Type G (Proceed). Display will type 0029 AB. Once again the registers may be examined.

M. Type E.

N. Type G (Proceed). Same comment as L.

O. Type E.

P. Type G (Proceed). Display will now type 002F 97. The program has now successfully completed the loop four times and the A-Register contains the incorrect sum.

8. Correcting the Program

A. From above it is evident that although the program was supposed to add five numbers, the loop was executed only four times. Therefore, the LDAB #4 instruction at location 24 and 25 should have initialized B to five. There are two approaches to fix the problem; one is temporary, the other is permanent. First the temporary one:

B. Type E.

C. Type V. Clears existing breakpoints.

D. Type 0026V. Set a breakpoint just after B register was loaded.

E. Type E.

F. Type 0020G. The program will execute up until 0026 and then go to JBUG. Display = 0026 CE.

G. Type G five times. This displays the current stack pointer (00F8). The B register contains the counter we wish to modify and is located at location SP + 2 (FA).

1-14

H.   Type E.

I.   Type 00FAM. The display = 00FA 04.

J.   Type 05. The display will change to 00FA 05.

K.   Type E.

L.   Type G. Proceed from user breakpoint down to the SWI instruction.

M.   Type E.

N.   Type 0015M. Display = 0015 0F. The program has now calculated the correct value for the addition of the five numbers 1-5. This verifies the fix but would be inconvenient to do each time the program was executed. A permanent change would be:

O.   Type E, then type V. This clears all breakpoints.

P.   Type 0025M. The display = 0025 04.

Q.   Type 05. The display = 0025 05. This will now permanently change the LDAB #4 instruction to a LDAB #5 instruction.

R.   Type E.

S.   Type 0020G. Execute the program.

T.   Type E.

U.   Type 0015M. Display = 0015 0F, the expected answer; the program is permanently fixed.

9.   Trace Through the Program

A.   Type E. In order to execute a trace, the program must first be stopped at a breakpoint. To trace from the beginning do:

B.   Type V. This clears the existing breakpoints.

C.   Type 0020V. This sets a breakpoint at the first instruction.

D.   Type E.

E.   Type 0020G (Go to user program). JBUG will immediately get the breakpoint and type 0020 8E.

F.   Type N. The program will execute one instruction and display 0023 4F. At this point the user can either display the registers by depressing the G key or can continue to the next instruction. To continue:

G.   Type N. Go to next instruction. Display register if desired.

H.   Continue step G for as long as desired. Note: Do not try to trace after executing the SWI instruction; a restart will be necessary before continuing.

I.   Type E. Clear trace mode.

10. Offset Calculation Including Register Modification

A. Assume that the SWI instruction at location 31 is to be changed to a branch always (BRA) to location 20. This will cause the program to remain in an infinite loop (i.e., the program has no end and will run continuously unless interrupted by some outside stimuli). Type 0031 to open the memory location. The display = 0031 3F.

B. The op-code for a BRA is a 20, so type 20. The display = 0031 20.

C. The second byte of the BRA instruction should be the two's complement negative offset to location 20. Since doing this calculation in hex is tedious and error prone, a small unsophisticated (there was only a little ROM left) program that does offset calculation was provided at location E000 in the JBUG ROM.

D. Type E.

E. Type R, then type five G's. This will display the current stack pointer so that the registers can be located and set up.

F. Type E.

G. Type in hhhhM where hhhh = SP + 2. This displays the current B register.

H. Type 00. This is the high byte of the destination address of the branch.

I. Type G. This displays location SP + 3 which contains the A-register value.

J. Type 20. This is the low byte of the destination address.

K. Type G. Display high byte of X register.

L. Type 00. Insert high byte of the branch op-code address.

M. Type G. Display low byte of X register.

N. Type 31. Insert low byte of the branch op-code address.

O. Type E.

P. Type E000G. When the program is completed it will return to JBUG via the SWI at location E013 and the PC will be displayed.

Q. Type G twice. The A register is now displayed and contains ED which is the correct offset.

R. Type G. The B register will contain an FF to indicate the branch was within range.

S. Type E.

T. Type 0032M.

U. Type ED. Insert the branch offset.

11. Executing and Aborting

 A. Type E.

 B. Type 0020G. The program will begin executing and the JBUG prompt "—" will disappear since the program now contains an infinite loop.

 C. Type E. This aborts (Exits) the program and returns control to JBUG. The prompt has now returned.

 D. Type R. Display the PC and any other registers of interest.

 E. Type E.

 F. Type G. Program will again execute.

 G. Type E. Abort program and return to JBUG.

 H. Repeat F and G for as many times as you wish.

12. Punch Program to Cassette

 A. Rewind the cassette. Type E.

 B. Type A002M.

 C. Type 00. Enter high byte of beginning address.

 D. Type G.

 E. Type 20. Enter low byte of beginning address.

 F. Type G.

 G. Type 00. Enter high byte of ending address.

 H. Type G.

 I. Type 32. Enter low byte of ending address.

 J. Type E.

 K. Turn on cassette in Record mode.

 L. Type P. Wait for JBUG prompt to return (approximately 30 seconds).

13. Load Program from Cassette

 A. Turn off power. This will cause the program in memory to be lost. Turn power back on.

 B. Push the Reset button and get the JBUG prompt.

 C. Rewind cassette.

 D. Start cassette in playback mode.

 E. Type L. Wait for the JBUG prompt. Test the program by any of the options described above.

CHAPTER 2
HARDWARE DESCRIPTION

2-1   GENERAL DESCRIPTION

The MEK6800D2 Kit consists of two printed circuit board assemblies, the Microcomputer Module and the Keyboard/Display Module. The Keyboard/Display Module includes interface circuitry for using standard Audio Cassette tape recorders as an off-line magnetic storage medium. The Keyboard/Display Module provides an economical operator interface to the Microcomputer Module and is supplied as a separate board in order to facilitate using the Microcomputer Module with other terminals or as an end-item in the user's system development.

The Keyboard/Display Module is used in conjunction with a monitor program (called JBUG) supplied in an MCM6830 ROM to permit an operator to communicate with and control the Microcomputer Module. A detailed description of the available functions and commands is included in the Operating Procedures section (Section 1-4 of Chapter 1). The features are, in summary:

1. Examine and Change Memory

2. Display and Change MPU Registers

3. Go to User's Program

4. Trace One Instruction

5. Set and Clear up to Five Breakpoints

6. Proceed from Breakpoint

7. Abort from User's Program

8. Calculate Offset to Relative Branch Destination

9. Transfer Designated Memory Locations to Magnetic Tape

10. Load Memory Locations from Magnetic Tape

2-2   MEMORY ORGANIZATION

The general memory organization of the Kit is shown in Figure 1-1-2 of Chapter 1. The memory map is shown in tabular form in Table 2-2-1. In the M6800 system, memory location assignments are determined by the combinations of MPU address lines that are applied to the device chip select lines.

In Table 2-2-1, the signals designated as $\overline{\text{ROM}}$, $\overline{\text{PROM}}$, etc., are the outputs of an MC74155 One-of-Eight Decoder. The MC74155 decodes the MPU's VMA, A15, A14, and A13 lines. For example, when these lines are all high, corresponding to memory address $E000 ($2^{15} + 2^{14} + 2^{13}$), the $\overline{\text{ROM}}$ output of the Decoder is low. This signal is applied to the chip select line $\overline{\text{CS1}}$ of the JBUG ROM, thus selecting this

					SIGNALS DECODED																
DEVICE	ADDRESSES	φ2	R/W	SYMBOL	VMA	A15	A14	A13	A12	A11	A10	A9	A8	A7	A6	A5	A4	A3	A2	A1	A0
ROM	E000-E3FF	1	1	ROM =	1	1	1	1				x	x	x	x	x	x	x	x	x	x
PROM	C000-C3FF			PROM =	1	1	1	0			+	x	x	x	x	x	x	x	x	x	x
RAM (Stack)	A000-A07F	1	x	STACK =	1	1	0	1	0				0	0	x	x	x	x	x	x	x
PIA	8020-8023	1	x	I/O =	1	1	0	0								1		0*	0*	x	x
ACIA	8008-8009	1	x	I/O =	1	1	0	0								0*		1	0*		x
PIA	8004-8007	1	x	I/O =	1	1	0	0								0*		0*	1	x	x
PROM	6000-7FFF			6/7 =	1	0	1	1			+	x	x	x	x	x	x	x	x	x	x
USER	4000-5FFF			4/5 =	1	0	1	0													
USER	2000-3FFF			2/3 =	1	0	0	1													
RAM (User)	0000-007F	1	x	RAM =	1	0	0	0				0	0	0	x	x	x	x	x	x	x
RAM (User)	0080-00FF	1	x	RAM =	1	0	0	0				0	0	1	x	x	x	x	x	x	x
RAM (User)	0100-017F	1	x	RAM =	1	0	0	0				0	1	0	x	x	x	x	x	x	x
RAM (User)	0180-01FF	1	x	RAM =	1	0	0	0				0	1	1	x	x	x	x	x	x	x

x = Decoded by the device addressed

* = Required but not decoded by the device addressed

+ = Decoded by 2K x 8 bit optional RAM

TABLE 2-2-1: MEK6800D2 Evaluation Kit II Address Map

device whenever the MPU outputs addresses in the range of $E000 to $EFFF. The particular locations within the ROM are selected by applying MPU address lines A0 thru A9 to the ROM address inputs. The JBUG ROM is located at the highest addresses in the kit's memory field. Note that A12 from the MPU is not applied to this ROM so it will also be selected when the MPU outputs its Restart and Interrupt Vector addresses, $FFF8 — $FFFF. Start-up and interrupt capability is obtained by placing the appropriate interrupt vector addresses in locations $EEE8 — $EFFF of the monitor program.

Additional addresses are decoded for the optional ROMs that can be added for user-generated programs. The Microcomputer Module is layed out to accept either two MCM68708 1024 x 8 bit Electrically Programmable Read Only Memories (EPROM) or two MCM7641 TTL 512 x 8 bit Programmable Read Only Memories. The PROMs are more economical but cannot be erased like the EPROM. Two MCM68316 2048 x 8 bit ROMs can also be used in the PROM locations. In this case, MPU address line A10 is applied to the MCM68316 for decoding the additional 1024 bytes. Jumpers on the PCB are provided for selecting the desired combination of ROM (see note 6 on the schematic diagram of Figure A3-a).

The MC6810 (128 x 8) RAM occupying memory locations $A000 — $A07F is used by the MPU for temporary storage of its internal registers during interrupts and subroutines and is selected by the signal STACK. The MPU also uses this area for storage of flags and temporary data used by the JBUG monitor. This organization allows a clean separation between monitor requirements and user RAM. The system assigns, via the RAM signal, the four user RAMs to the bottom of memory in locations $0000 — $01FF (first 512 bytes). This RAM is useful for small user programs or for scratchpad memory in the MPU's direct addressing range for larger user programs. To prevent contention with these RAMs, expanded systems should avoid these memory

locations; however, the board is easily modified (see Section 2-8 on system expansion) to accommodate external memory in this range.

The two signals $\overline{2/3}$ and $\overline{4/5}$ are brought to the edge connector and may be used to select two external 8K-byte blocks of memory. The $\overline{2/3}$ line decodes the second 8K-byte block ($2000 — $3FFF) of the memory space; $\overline{4/5}$ decodes the next 8K locations ($4000 — $5FFF).

2-3   INPUT/OUTPUT DEVICES

Three I/O devices are provided with the Kit and are selected by the $\overline{I/O}$ signal. The PIA at addresses $8004 — $8007 is provided for user specified peripheral devices. Its input/output lines are brought out ot the J1 edge connector. A wire-wrap area is provided for any buffering or interface circuitry that might be required. In normal kit operation, the PIA at addresses $8020 — $8023 is used to interface the Keyboard/Display to the MPU. If a terminal and the MINIbug monitor are used, this PIA is also available (via the J2 edge connector) for user specified I/O. The ACIA at memory locations $8008 — $8009 is used to interface with the Audio Cassette circuitry on the Keyboard/Display Module, but can alternatively be used to interface to serial RS-232 or TTY type terminals (with the MINIbug monitor) if desired. Note that the address lines A2, A3, and A5 are applied to the chip select lines of the $8004 PIA, the ACIA, and the $8020 PIA, respectively. This insures the selection of only one of the three I/O devices when the $\overline{I/O}$ signal is active. Note also that connecting the A2, A3, and A5 address lines to the PIA and ACIA chip select lines will cause a wider range of addresses than is required to be selected. For example, when the $\overline{I/O}$ signal is low (A15, A14, A13 = 110) and A5 is high, any address in the range $8020 — $802F may be present on the bus, depending on the states of A0 — A3. The $8020 PIA does not decode the A2 or A3 lines; therefore, addresses in the range $8024 — $802F will also select this PIA. However, it is not necessary to use additional decoding if the use of these addresses is avoided in the user program.

2-4   SYSTEM CLOCK

The Kit uses a 614.4 kHz MC6871B system clock. The frequency was selected in order to provide a simple means of obtaining a 4800 Hz reference frequency used by the 300 baud serial data rate tape cassette circuitry. The 4800 Hz signal is obtaining by dividing the MC6871B's 2f$_o$ output (1.2288 mHz) by 256 with an MC14040 counter. The 4800 Hz signal is applied to the cassette interface circuitry, along with the ACIA outputs, via the J2 edge connector.

2-5   KEYBOARD/DISPLAY

The Keyboard/Display Module is provided as a separate printed circuit board in order to facilitate the use of other terminals and to make the U21 PIA readily available for eventual expansion of the system. The Keyboard/Display Module connects to the Microcomputer Module via a ribbon cable and connector provided with the Kit. A scanning technique is used on both the display and the keyboard in order to minimize system cost. Since operation of this circuitry is intimately related to the control program, refer to the software discussion (Section 3-4) and the assembly listing, as well as the schematic diagram of Figure A3-b with the following description.

The scanning procedure uses lines PB0 — PB5 of the PIA, corresponding to SCNREG in the JBUG assembly listing. The digit patterns to be displayed are put out on lines PA0 — PA6 and are designated as DISREG in the listing. The JBUG monitor program alternates between refreshing the display and checking for a key closure in the following manner.

The OUTDS subroutine places the digit pattern for the left-most display on PA0 — PA6 and then sets PB5 high, causing that digit to be lighted. During this time, PB4 — PB0 are low, thus the other digits are off. This digit of the display is held on for approximately 1.0 ms, after which the pattern for the second digit is put on lines PA0 — PA6. PB5 is switched low, and PB4 is taken high to select the second digit. This sequence continues until the right-most digit has been selected, at which time the program goes to the KEYDC subroutine to check for key closures. The blanking pattern ($FF) is placed on PA0 — PA6 to blank the display so that lines PB0 — PB5 can be used to interrogate and decode the keyboard. Following the keyboard check, operation returns to the display sequence. The refresh rate is fast enough that the displays appear to be on continuously.

An MC14539 CMOS One-of-Four Data Selector (U10) is used to sequentially select each column in the keypad matrix and route it to PA7 for testing by the monitor program. The address data for selecting each column is output to the Data Selector on lines PB6 and PB7. Refer to the description of the monitor program in Section 3-4 for details of the keyboard decoding technique. Note that CB1, a PIA interrupt input, is directly connected to column 2. This allows the E key to be used for generating an $\overline{\text{NMI}}$ interrupt for escaping from "blown" user programs. The MC75452 buffers serves to increase the PIA's drive capability.

2-6   TRACE (EXECUTE SINGLE INSTRUCTION)

A hardware trace function is provided that permits a user's program to be executed one instruction at a time. Results of the execution, including MPU Register contents, can be examined between each Trace command. The Trace function will operate on programs in either RAM or ROM and is useful as a debugging aid. The circuitry consists of an MC8316 Counter and two MC7479 D-flip-flops connected as shown in Figure 2-6-1. Refer to this figure also for the associated timing waveforms.

When a Trace command occurs, the system is normally in the Register display mode from either a previous Trace or having run to a Breakpoint. Thus, the user's Register values are stacked and the monitor program is alternating between refreshing the displays and checking for new key closures. The user Program Counter value saved on the stack is pointing to the next user instruction to be executed. Invoking a Trace command at this point causes the MPU to start the Trace Counter (via CA2 of the Keyboard/Display PIA) and then execute a Return from Interrupt (RTI) instruction. This causes the MPU to reload its Registers from the stack and begin executing the next user instruction. In the meantime the Trace counter is counting machine cycles. The eleventh cycle after the counter is started will be a fetch of the op-code for the next user instruction (RTI takes ten cycles to execute). The Trace circuitry detects the eleventh cycle and generates a low going $\overline{\text{NMI}}$ signal. Since the shortest instruction is at least two cycles long, $\overline{\text{NMI}}$ will always be low at the end of the first instruction and will cause a return to the JBUG monitor program via an $\overline{\text{NMI}}$ interrupt. The $\overline{\text{NMI}}$ service routine sets CA2 back high, resetting the counter in readiness for another command. The $\overline{\text{NMI}}$ service routine is described in Section 3-8 in greater detail. From the user's point of view, closure of the N (Trace) key causes the system to execute one instruction and then stop so that the results can be examined.

2-7   AUDIO CASSETTE INTERFACE

Circuitry for interfacing an ACIA to an audio cassette recorder/player is included on the Keyboard/ Display Module. This circuitry enables the user to store and retrieve data on ordinary audio cassettes at a 300
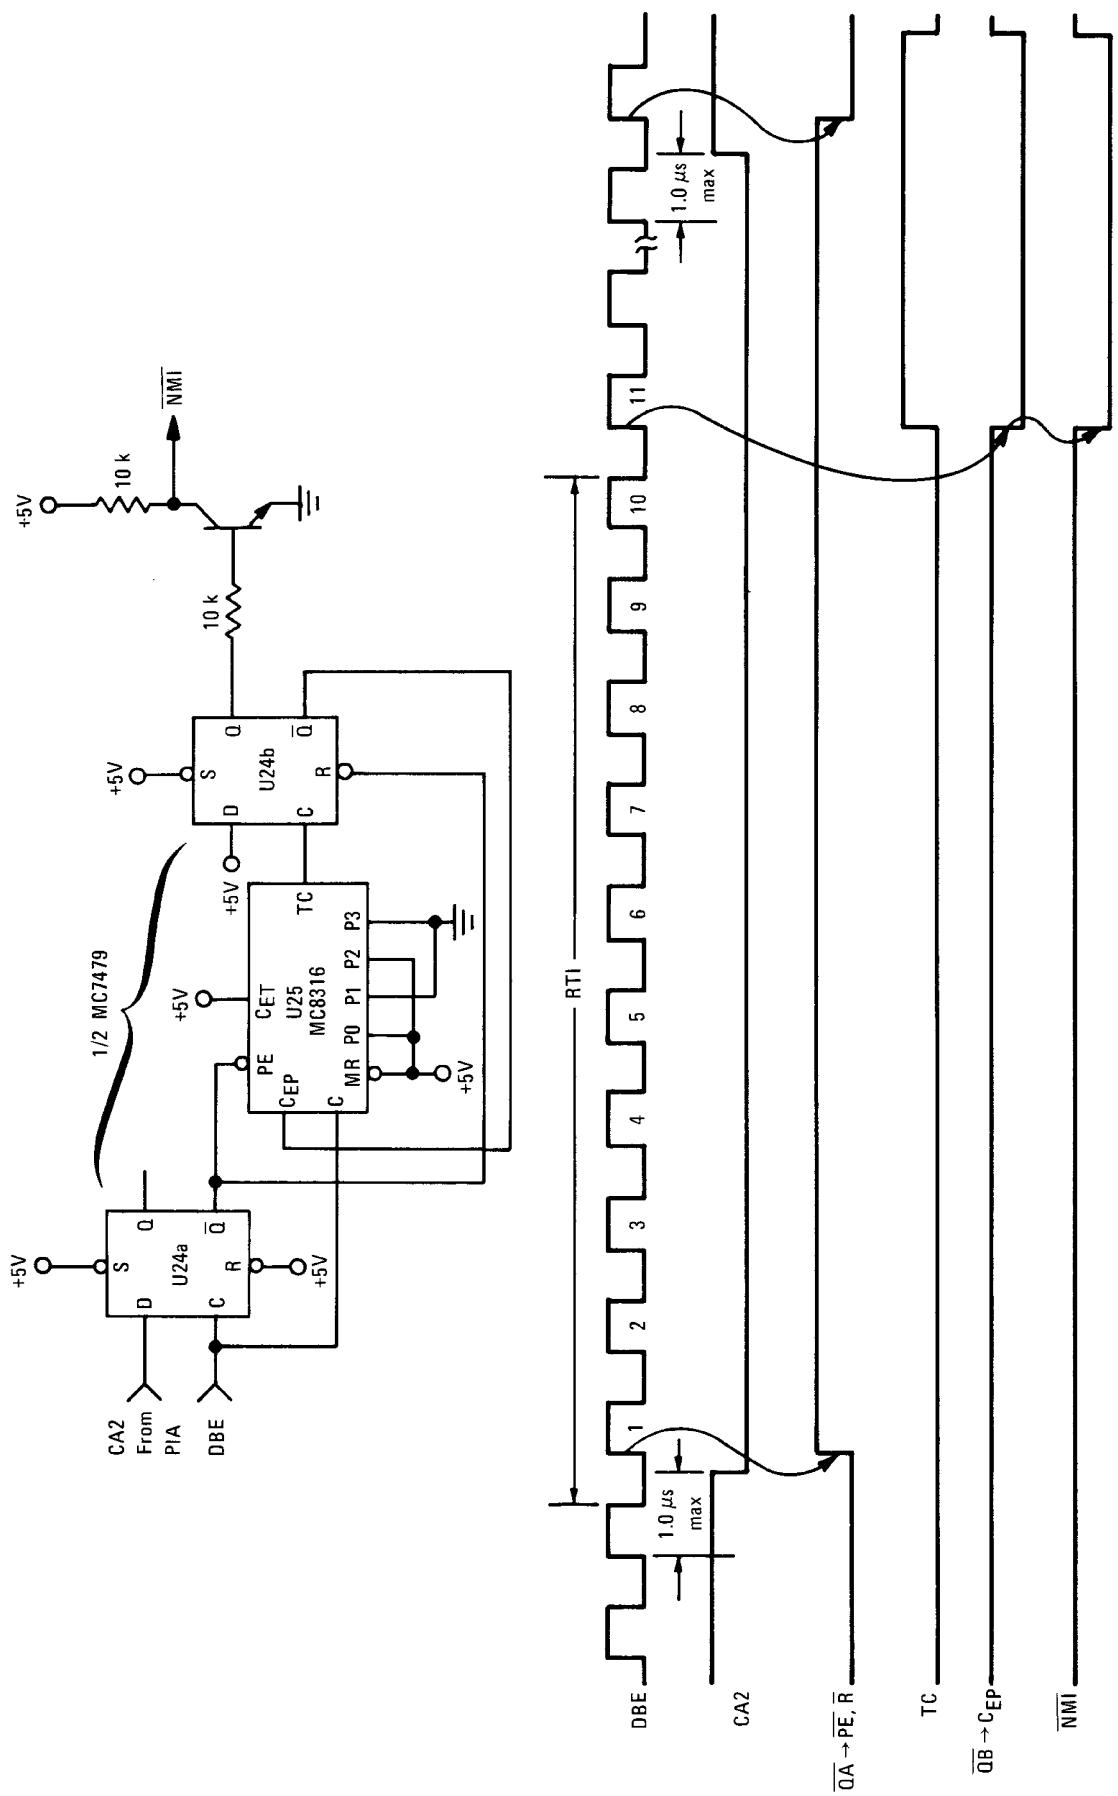
FIGURE 2-6-1. Trace Circuitry and Timing Waveforms

baud (30 characters per second) serial clock rate. Data is stored on the tape using the "Kansas City Standard" recording format, so-called due to its formulation during a symposium sponsored by *BYTE* Magazine in Kansas City, Missouri in November, 1975. The format is designed to eliminate errors due to audio system speed variations[5] and has the following characteristics:

1. A Mark (logical one)[6] is recorded as eight cycles of a 2400 Hz signal.
2. A Space (logical zero) is recorded as four cycles of a 1200 Hz signal.
3. A recorded character consists of a Space as a start bit, eight data bits, and two or more Marks as stop bits.
4. The interval between characters consists of an unspecified amount of time at the Mark frequency.
5. In the data character, the least significant bit (LSB) is transmitted first and the most significant bit (MSB) is transmitted last.
6. The data is organized in blocks of arbitrary and optionally variable length preceeded by at least five seconds of Marks.
7. Meaningful data must not be recorded on the first 30 seconds of tape following the clear leader.

A control program in JBUG causes this format to be followed and incorporates the following additional characteristics:

1. At the beginning of tape (BOT), the ASCII character for the letter "B" is recorded following 1024 Marks (approximately 30 seconds).

2. The "B" is followed by one byte containing the block length (up to 256 bytes in a particular block).

3. The next two bytes recorded contain the starting address in memory from which the data is coming.

4. Up to 256 bytes of data are then recorded and followed by 25 marks and the ASCII character for the letter "G".

The control program uses the additional features to insure that the Punch and Dump functions are performed in an orderly manner (see the explanation in Section 3-7 for additional information).

The cassette inferface circuit diagram of Figure 2-7-1 serves as an aid to understanding the following description of the Punch and Load operations. The Punch (transfer of data from the Microcomputer Module's memory to tape) and Load (transfer from tape to memory) commands are accomplished by a combination of the control program, the MC6850 Asynchronous Interface Adapter (ACIA), and the cassette interface circuitry.

The ACIA is, in effect, a bus-oriented, universal, asynchronous receiver/transmitter (UART). In the transmit mode (Punch), it accepts parallel 8-bit data from the MPU bus, adds the formatting start bit and stop bit, and then converts the data to a serial binary stream (Tx Data in Figure 2-7-1). The desired format is established by instructions from the MPU as it executes the Punch command. In the receive mode (Load), the ACIA accepts an incoming serial data stream (Rx Data) and a sampling clock (Rx Clk). It strips off the start/stop bits and passes each incoming byte to the MPU for transfer to memory, again under control of the MPU as the

---

[5]The circuitry provided with the kit will accommodate speed variation of approximately ±25%.
[6]Logical ones and zeros will be alternatively referred to as Marks and Spaces, respectively, in accordance with serial data transmission conventions.

FIGURE 2-7-1. Audio Cassette Interface Circuitry
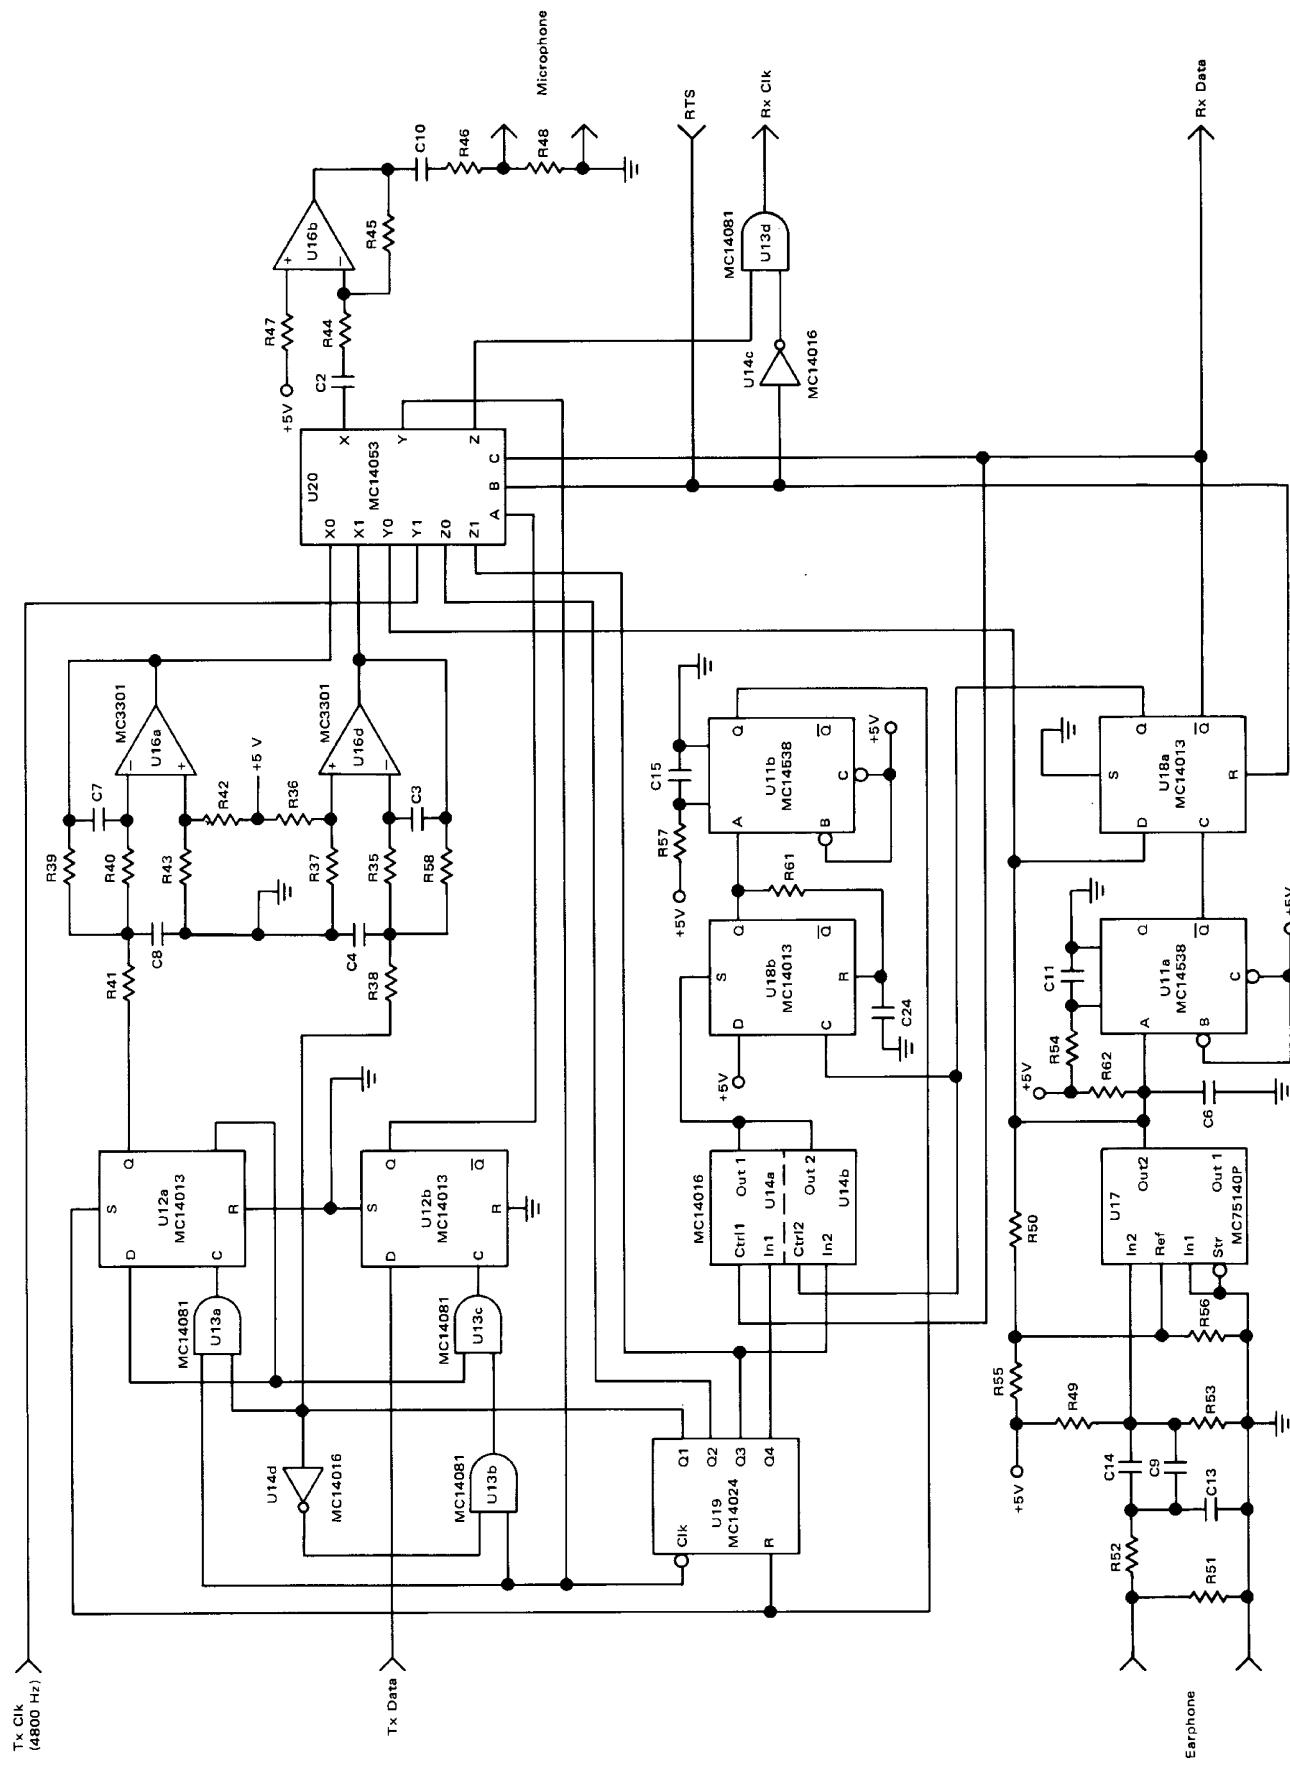
program executes. The ACIA's Request-to-Send, RTS, acts as a gating signal to switch the interface circuitry between the Punch and Load modes. The reference documents may also be referred to for additional details on the ACIA's characteristics.

Timing waveforms corresponding to the appropriate signals in Figure 2-7-1 are provided as Figures 2-7-2, 2-7-3, and 2-7-4 as an aid to study of the cassette interface circuitry.

During a Punch operation the interface circuitry operates on the serial data to convert each logical one (Mark) to an 8-cycle burst of 2400 Hz signal and each logical zero (Space) to a 4-cycle burst of 1200 Hz signal which is then recorded on tape.

The circuitry reverses this procedure during a Load operation; it decodes the incoming frequency-modulated signal in order to recover the binary data and a sampling clock.

In Figure 2-7-1, the MC14053 Multiplexer/Demultiplexer, U20, (Data Router, for simplicity) is used to steer signals to their required points during both Load and Punch operations. For instance, during Punch, B and C are high while A is derived from the binary data on Tx Data. For this combination of control signals Y is connected to Y1 (because B is high); thus the 4800 Hz Tx Clk signal from the Microcomputer Module is applied to the clock input of the MC14024 Counter, U19. Also, because C is high, Z is connected to Z1, but this signal is not used during Punch. The 2400 Hz and 1200 Hz signals are obtained by selecting either the $\div 2$ (Q1) or the $\div 4$ (Q2) outputs of the Counter as it is clocked at 4800 Hz.

The signals at X0 and X1 are 1200 and 2400 Hz sine waves obtained via the bandpass filters of U16a and U16d. One or the other of these signals (depending on the Tx Data logic level at A) will be level shifted, attenuated, and applied to the microphone output terminals.
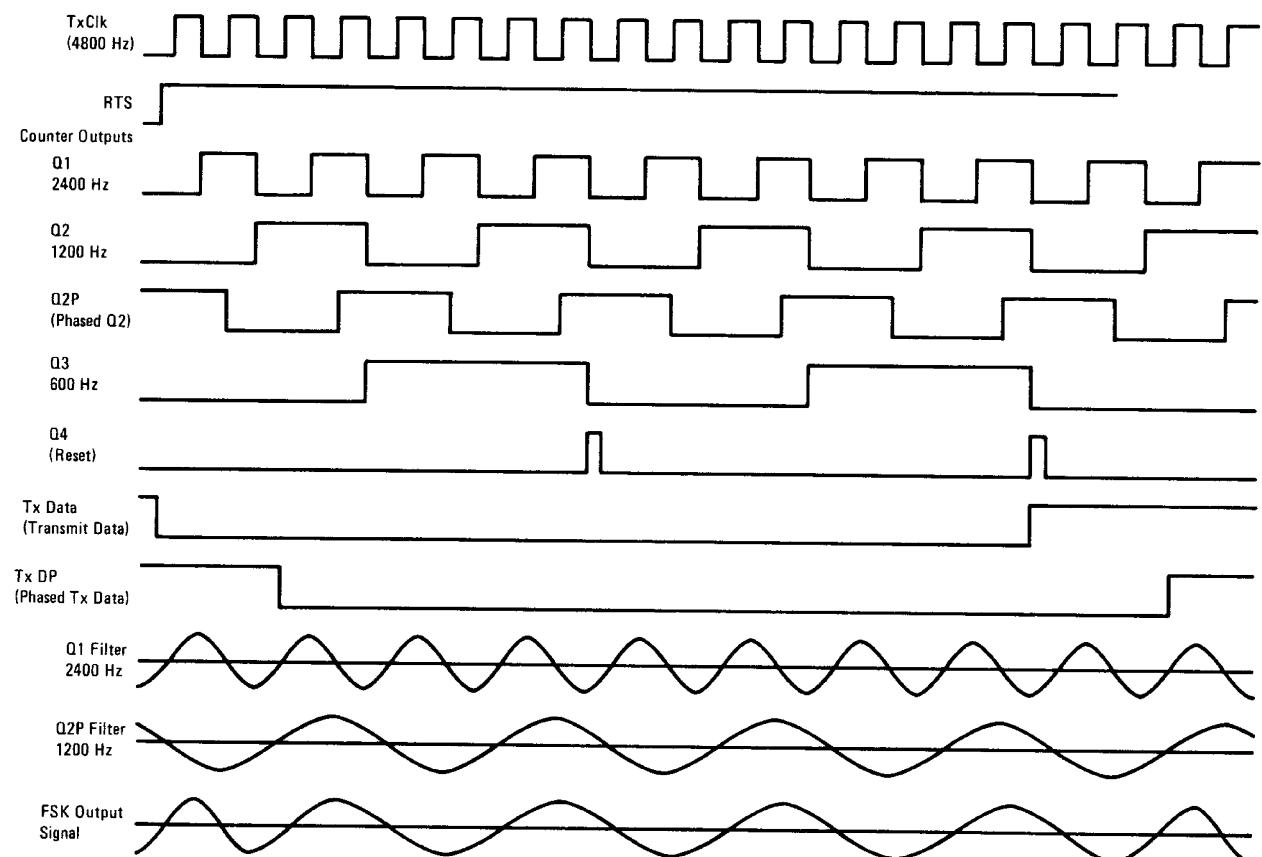
FIGURE 2-7-2. Transmit Waveforms

2-8

Input from
Earphone

"Squared" Data
Output of U17

Output of U11a
One-Shot

Rx Data
(Output Q of U11b)

Counter Reset
(Output of U11b)

Counter Outputs

Q1

Q2

Q3

Q4

Rx Clk
(Output of U13d;
Same as Q3
via Data Router)
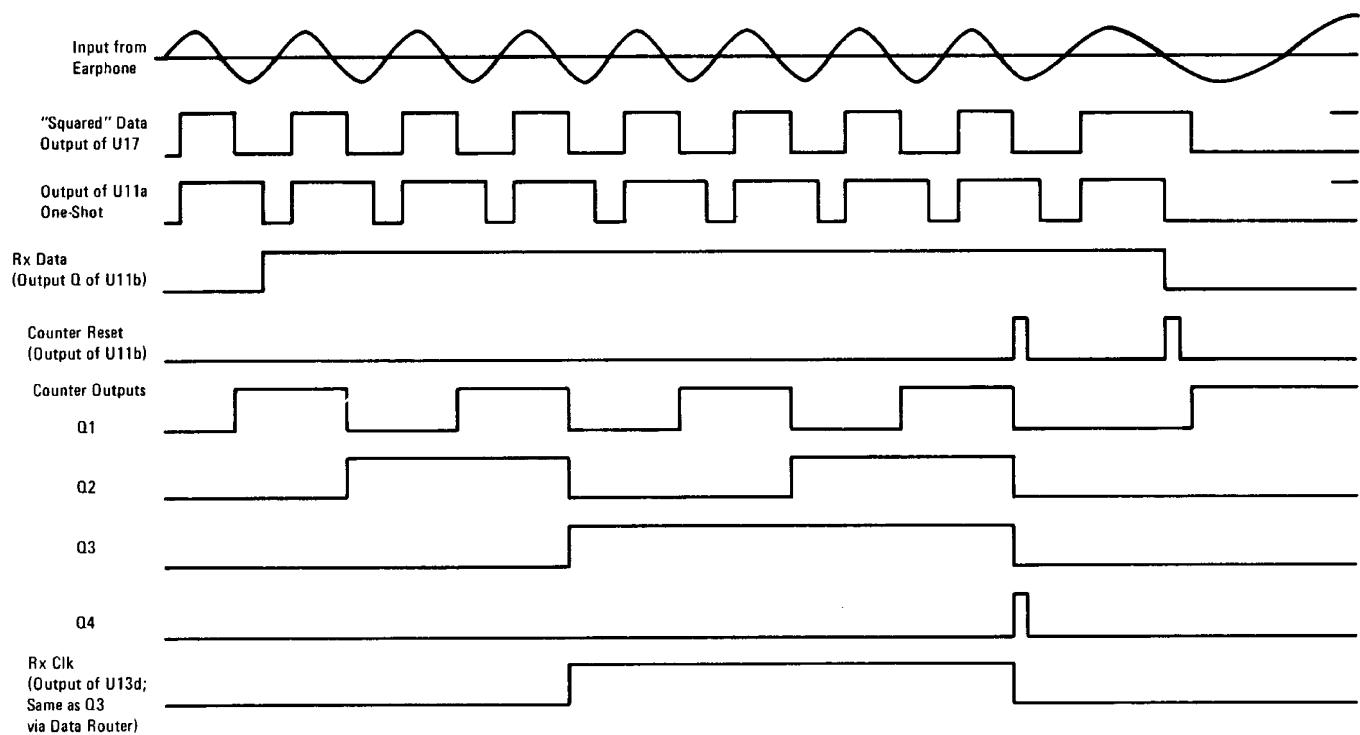
FIGURE 2-7-3. Receive Waveforms, Space-to-Mark Transition

Input from
Earphone

"Squared" Data
Output of U17

Output of
U11a One-Shot

Rx Data
(Output Q̄ of U18a)

Counter Reset
(Output of U11b)

Counter Outputs

Q1

Q2

Q3

Q4

Rx Clk
(Output of U13d;
Same as Q2 via
Data Router)
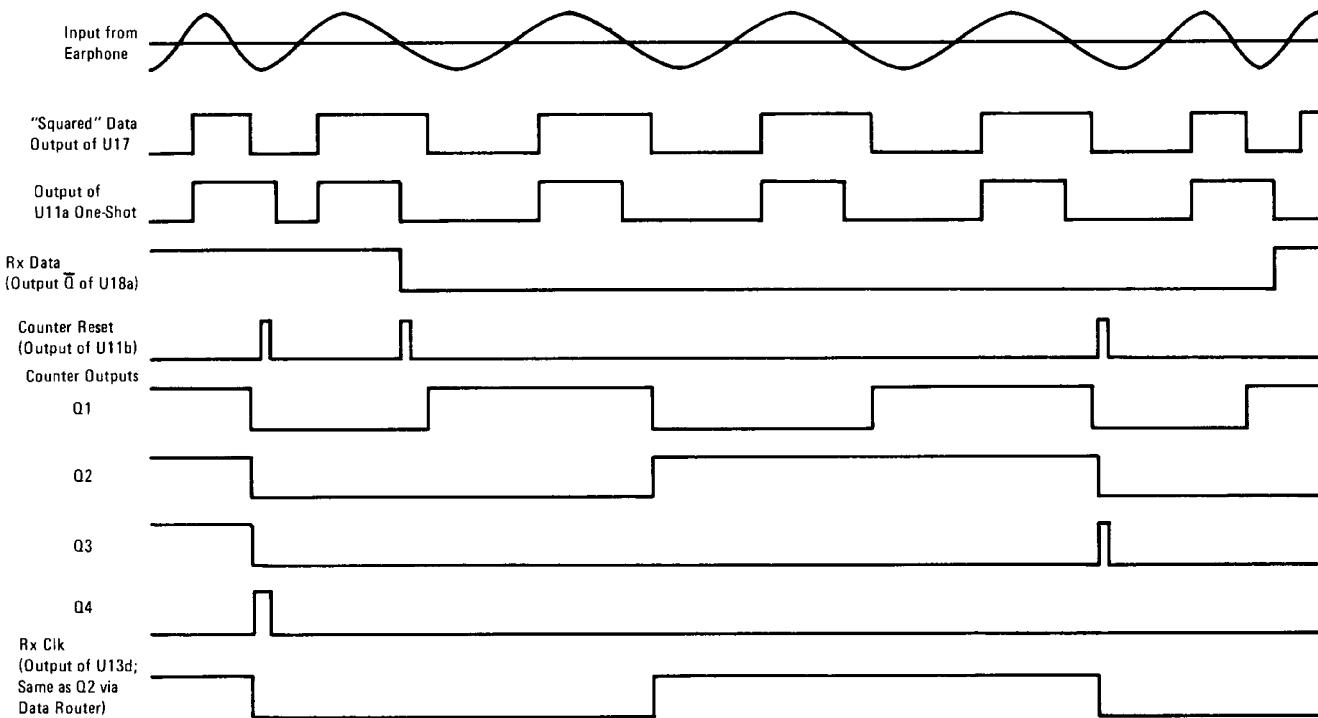
FIGURE 2-7-4. Receive Waveforms, Mark-to-Space Transition

Note that the 1200 Hz square wave is obtained from the output of U12a rather than the Q2 output of the MC14024. This, together with the gating of U13 and the delay associated with U12b, insures that switching of output frequencies will occur only when the outputs of U16a and U16d are at essentially the same voltage. (Refer to the timing diagram of Figure 2-7-2.)

During a Load operation, the incoming signal from the cassette earphone is filtered, amplified and squared by the U17 Line Receiver. (U17 is connected as a Schmitt trigger to reduce noise problems.) This results in a signal, at digital levels, that varies between 2400 Hz and 1200 Hz according to the one-zero pattern that was recorded on the tape. This frequency-modulated signal is then converted to logical ones and zeros by the pulse width discriminator formed by the U11a MC14538 Monostable Multivibrator (or One-Shot) and the U18a type D flip-flop. Incoming signals less than 1800 Hz are decoded as zeros; frequencies higher than 1800 Hz are decoded as ones. The Received Data will be present at the $\overline{Q}$ output of U18a.

The required Rx Clk signal, a positive transition at the mid-point of each bit-time and a negative transition at the end of each bit-time, is generated as follows:

During Load the digital level 2400/1200 Hz signal, instead of the 4800 Hz Tx Clk signal, is steered to the Counter clock input. The Counter's $\div 8$ (Q3) and $\div 16$ (Q4) outputs are connected to the inputs of U14b and U14a, respectively. The control inputs of U14a and b are connected to Received Data and applied to the Set input of U18b. The Output of U18b triggers the Counter Reset one-shot, U11b. Hence, either the $\div 8$ or $\div 16$ Counter output is steered back (via X) as a reset, depending on whether the data is a zero or a one, respectively. The Counter is also reset by every Mark-to-Space transition via the U11b One-Shot. The Counter's $\div 4$ and $\div 8$ outputs are connected to Z0 and Z1, respectively. These connections combined with the reset signals result in a positive transition at the Z output of the Data Router after either four cycles of 2400 Hz or two cycles of 1200 Hz. Thus, the Rx Clk (Z gated by $\overline{RTS}$) has a positive transition in the middle of each bit-time and a negative transition at the end of each bit-time.

2-8   KIT EXPANSION

Provision is made for buffering circuitry to allow the Microcomputer Module to be implemented into a larger system. The buffers and pinouts selected on the bottom edge connector are compatable with the EXORciser so its I/O and Memory Modules can be used with this kit. The direction of data flow across the data bus buffers is controlled by the MC7430 NAND gate, U7. This decoding provides for data flow off the board to the external system when there is a Memory Read Cycle at an address that is not decoded by the devices on the Microcomputer Module itself. Note that the signal $\overline{RAM}$ decodes the lowest 8K bytes of memory which are reserved for on-board memory (MCM6810's). Should the user want to assign the lowest 8K of memory addresses to off-board memory, the following changes are required:

Remove the MCM6810's decoding addresses 0000, 0080, 0010 and 0180; remove the signal $\overline{RAM}$ from pin 4 of the MC7430 and tie pin 4 to +5 V. The signal provided at the bus connector called $\overline{RAM}$ can be used on outside memory to indicate an MPU access to an address in the bottom 8K bytes of memory which now resides off the module.

Provision has been made for using a zener diode (1N4733) to generate a −5 V supply for the 2708 PROMs (if they are used) from −12 V in case this kit is operated in an EXORciser-type system which does not have −5 V available. Should −5 V be available, the zener diode and associated 68 ohm resistor can be omitted and the −5 V brought in through the bus connector.

CHAPTER 3
SOFTWARE DESCRIPTION (JBUG MONITOR)

3-1   **GENERAL DESCRIPTION**

The control and diagnostic capability of the MEK6800D2 Kit is provided by the JBUG monitor program resident in the MCM6830 1K x 8 bit ROM supplied with the Kit. The characteristics of this program are described in the following sections. An assembly listing of JBUG is included (Appendix 1) and may also be referred to in studying the flow of the program.

Several RAM locations are used for temporary data storage and as flags by the monitor in communicating between the various routines. Some of the more significant ones are described below and are referred to in the description of JBUG.

SP
($A008)
A RAM location in which the user's Stack Pointer is saved whenever the monitor resumes control. The user's Stack Pointer is required for locating user Registers on the stack and to restore these Register when returning to the user program.

DISBUF
($A00C)
Eight RAM locations used as a buffer to hold the current values being displayed. In the first six locations, the high order 4 bits of each location represent the display digit-count while the low order 4 bits contain the value that is to be displayed on that digit. For example, the high order 4 bits of the sixth location in DISBUF identify the right-most display. The last two locations in DISBUF are used for temporary storage of data that is input from the keypad during a Memory Change function.

DIGIN4
($A014)
A flag that is set to one (LSB) when at least four hex digits have been entered from the keyboard (as in Memory Examine)

DIGIN8
(A015)
A flag that is set to one (LSB) when six hex digits have been entered from the keyboard (as in Memory Change)

MFLAG
($A016)
A flag that is set to one (LSB) when the M key is depressed to invoke the Memory Examine Mode.

RFLAG
($A017)
A flag that is set to one (LSB) when the R key is depressed to invoke the Register Display Mode.

NFLAG
($A018)
A flag that is set to one (LSB) when the N key is depressed to invoke the Trace Mode.

VFLAG
($A01D)
A flag that is set to the number of breakpoints (up to five) that have been set.

XKEYBF
($A01A)
A pointer to the next empty location in DISBUF where the next hex key entry will be stored.

The flow of JBUG is straightforward and is shown in Figure 3-1-1. After release of the RESET button, the monitor goes through an initialization sequence in which the stack pointer is initialized to $A078,

the PIA for the Keyboard and Display is configured, the flags which communicate between routines are cleared and a dash (-) is placed in the first location of DISBUF to be displayed on the lefthand digit as a prompt to indicate that the MPU is executing the JBUG monitor. After initalization the display is scanned; this involves displaying the contents of DISBUF (first six locations). The display scan takes about 6 ms (6 digits at 1.0 ms per digit) after which the Keyboard is scanned and decoded (KEYDC). A test is made to see if any key is depressed and if none is found the program returns to OUTDS. If a key is found to be depressed, a decoding process takes place to debounce the key and to determine which key is depressed. If the key is a hex key (0-F) then its value is placed in the next open location in DISBUF. If the key is one of the command functions, that command is decoded and executed before returning to the display routine OUTDS. As shown in Figure 3-1-1, the basic background program flow alternates between refreshing the display and checking for key closures.
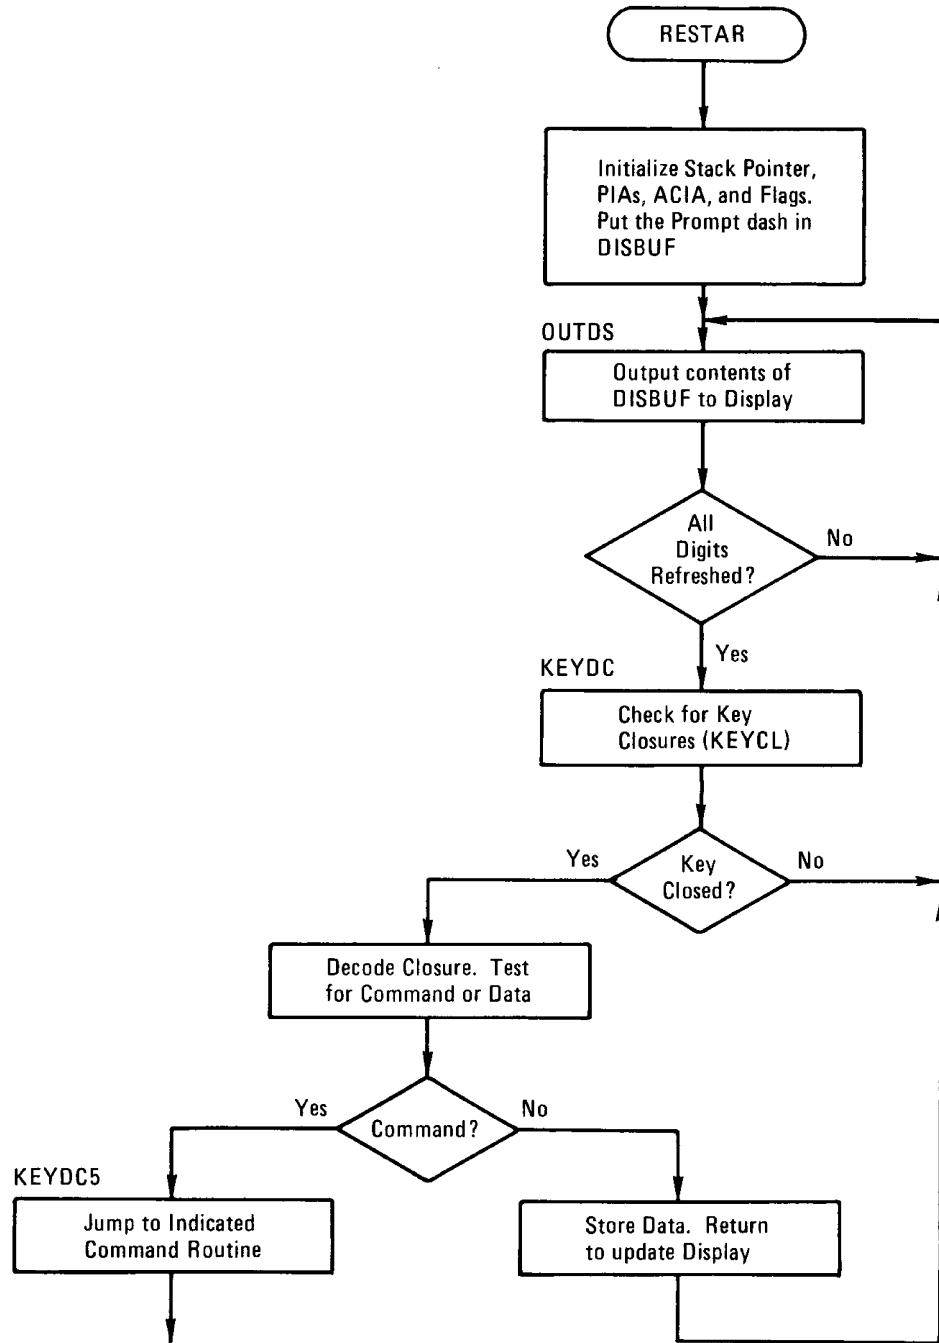
FIGURE 3-1-1. Overall Program Flow for JBUG Monitor

3-2   RESTART/INITIALIZATION ROUTINE

When the RESET push button is released, the MPU outputs addresses $FFFE and $FFFF in order to bring in the starting address of the restart routine. Because this system does not require full address decoding (see Section 2-2), the top two locations of the JBUG ROM ($E3FE and $E3FF) respond with $E08D, the beginning address of the restart routine, RESTAR. RESTAR first initalizes the Stack Pointer to $A078 and then sets the $\overline{\text{NMI}}$ interrupt pointer to $E14E. The $\overline{\text{NMI}}$ interrupt pointer is placed in RAM so that the user can change it and force $\overline{\text{NMI}}$ interrupts to do something other than go to the JBUG monitor (if this is done all diagnostic capability of JBUG will be lost). The Keyboard/Display PIA, U21, is then configured to match the hardware connections shown in the Keyboard/Display Module Schematic Diagram, Figure A3-b. The flags are cleared and a code to blank the display ($17) is stored in all locations of DISBUF. A dash (-) is written in the first location of DISBUF to indicate that the MPU is executing the monitor program. Flow then branches to the OUTDS routine whose function is to move the contents of the DISBUF out to the LED displays.

3-3   DISPLAY ROUTINE

The display routine, OUTDS, is detailed in the flow chart of Figure 3-3-1 and begins at line 260 (address $E0FE) of the assembly listing. The first value in DISBUF is loaded into Accumulator A (Acc.A). The
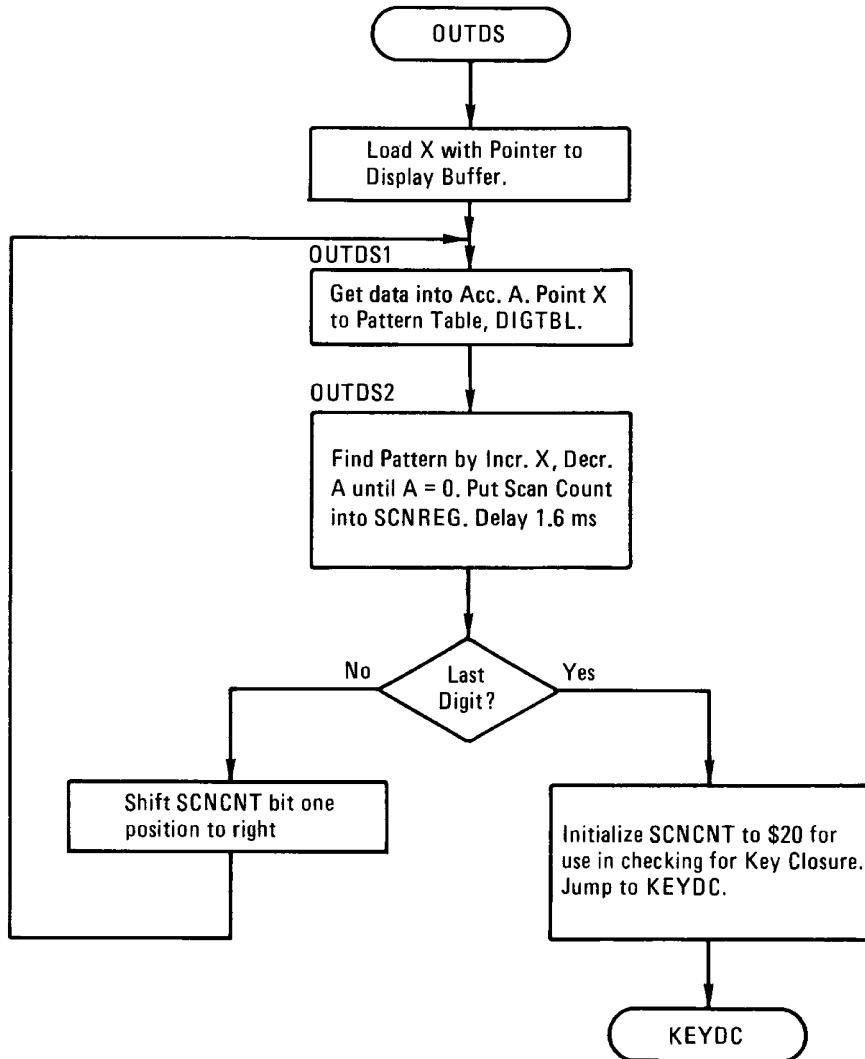
FIGURE 3-3-1. Program Flow for Output Display Routine

Index Register is then pointed to the beginning of DIGTBL, a table which has the correct bit patterns for the character set to be displayed. The Index Register, X, is then moved to the table location corresponding to the required pattern by decrementing Acc.A while X is incremented until Acc.A = 0. This pattern is then put out to DISREG (the anodes of the seven segment display) as the first digit of display is selected by SCNREG (the cathodes of the display).

This process is repeated for all six positions by moving a "one" through SCNREG as each position's data appears in DISREG. In this manner, the data in the first six locations of DISBUF are output to their respective display positions and turned on for about 1.0 ms each (using the DLY1 delay loop. After all six positions have been scanned, the variable SCNCNT is reset to $20 (corresponding to the left-most display) in readiness for use during the next refresh scan cycle.

3-4   KEYBOARD SCAN AND DECODE ROUTINE

Following each display refresh cycle, the monitor jumps to KEYDC (line 302, address $E14E, flow charts in Figures 3-4-1 and 3-4-2), the routine for scanning and decoding the Keyboard. The Keyboard is first tested by subroutine KEYCL to determine if a key has been depressed. The display is blanked by storing $FF to avoid flicker while the SCNREG lines are being used to interrogate the keyboard. Storing $3F to SCNREG applies logical zeros to the rows of the keyboard matrix. KEYCL1 then tests each column in sequence to determine if a key is closed. (A depressed key will couple the zero on its row through to PA7 when tested.) The KEYCL routine returns to the caller, KEYDC, with status information in Acc.A. If no key was closed, Acc.A will contain $00 and the program will branch back to OUTDS for a display refresh. If a key was closed, the program branches to a 20 ms delay (DLY20) to allow time for key debounce. KEYDC1 then scans the keyboard one row at a time using KEYCL to scan the columns looking for the closed key.

An exit back to OUTDS occurs (line 312) if the last row has been scanned without finding a closure. If there was a closure, KEYDC2 compares the value returned in Acc.A with codes in table KEYTBL to determine the key value. The KEYTBL values are related to the column and row position for each key. Each key is represented by a value in the range 0-23 with the first 16 values representing hex numbers. Once the key value has been found, the program enters the KEYDC4 routine to wait for the key to be released. After release is detected, the program again delays for 20 ms to provide time for debounce. Line 327 begins decoding the key value into either hex or command. Hex keys are entered into DISBUF at the location pointed to by XKEYBF and then tested to see if four digits have been entered yet. If four digits have been entered, DIGIN4 is set to enable further operations such as Memory Examine. Comand key values are routed to KEYDC5, a jump table resulting in a branch to one of eight locations depending on the command key depressed. The following action is taken on each command key:

P-KEYDC8   The display buffer, DISBUF, is cleared and the program jumps to subroutine PNCH. Upon return from the punch routine, a dash (-) is written to DISBUF (to inform the operator that the punch has been accomplished) and the program jumps to OUTDS.

L-KEYDC9   The display buffer (DISBUF) is cleared and the subroutine LOAD is called. After the data has been loaded from tape the monitor dash is written into DISBUF and the OUTDS routine called to inform the operator that the load is complete.

3-4

N-KEYDCA   Breakpoints, if any, are removed by clearing VFLAG. The NFLAG is set (LSB) to identify the TRACE mode and CA2 of the Keyboard/Display PIA is switched low to start the trace counter. An RTI instruction is then executed to reload the stack into the MPU and go on with the next user instruction.

V-KEYDCB   The DIGIN4 flag is tested to determine if it is in the clear or set breakpoint mode. If four digits have been entered, the DIGIN4 flag will be set and the program will call the set breakpoint (SETBR) subroutine and then go to the OUTDS routine. If the DIGIN4 flag is clear, then V was a clear breakpoint command and the VFLAG is cleared thus clearing any breakpoints which may have been set.

M-KEYDCC   The MFLAG is set to indicate that the Memory mode has been selected. The DIGIN4 flag is tested to make sure a full memory address has been entered. If four digits have been entered, the Memory Display Subroutine (MDIS) is called; otherwise the program goes back to OUTDS.

E-KEYDCD   Causes the MPU to clear the DISBUF locations, write the monitor prompt dash to DISBUF, and then branch to the display refresh routine. When a user program is in progress the E key generates an $\overline{\text{NMI}}$ interrupt, providing an abort function.

R-KEYDCE   The RFLAG is incremented to designate the Register Display mode and then the Register Display subroutine is called.

G-KEYDCF   The G key performs one of three functions depending on the current mode of operation. If the monitor program is in the Memory Examine or Register Display mode, the G command causes the next location to be displayed. If neither of these modes is in effect, G can be used to either go to a user program or proceed from a breakpoint. These operations are described in greater detail in the next paragraph.

When a G command is decoded the jump table directs program flow to KEYDCF (line 431, address $E20E) and the MFLAG is tested to determine if the current G key closure is a command to go to the next memory location. If MFLAG is set, the Memory Increment (MINC) subroutine is called and will be followed by the Memory Display (MDISO) subroutine. If MFLAG is clear, the RFLAG is tested to determine if this G closure meant go to the next Register location. If RFLAG is set, the subroutine to display next Register (REGST1) is called.

If neither MFLAG or RFLAG is set, the G closure is interpretted as a Go to User Program command, from either a specific address or from the location indicated by the current value of the Program Counter saved on the stack. The DIGIN4 flag is tested (line 436) to determine if a new starting adress has been entered. If DIGIN4 is set, the program replaces the stacked value of the Program Counter with the new Go address is saved in the first four locations of the Display Buffer, DISBUF. After checking to see if there are any breakpoints to install, the MPU executes a Return from Interrupt (RTI) to the user program.

If DIGIN4 is clear, a proceed from current Program Counter mode is indicated. In this case, the GETXB routine is called to determine if any breakpoints have been set. If no breakpoints are in effect, keyboard interrupts are enabled (TGC, line 464) and the MPU execues an RTI back to the user's program. If breakpoints are indicated, the trace routine (TRACE, line 384) is called to step one instruction. On receiving the NMI interrupt caused by the trace, the NMI routine (NONMSK, line 91) checks to see if both trace and breakpoint

flags are set. If set, JBUG then installs the breakpoints (TGC, line 464) and returns to the user's program. This procedure is necessary to insure that the instruction at the current breakpoint location will itself be executed on a proceed and that the breakpoint location will contain the SWI the next time it is executed. This is especially important when the breakpoint is in a loop in the user's program.
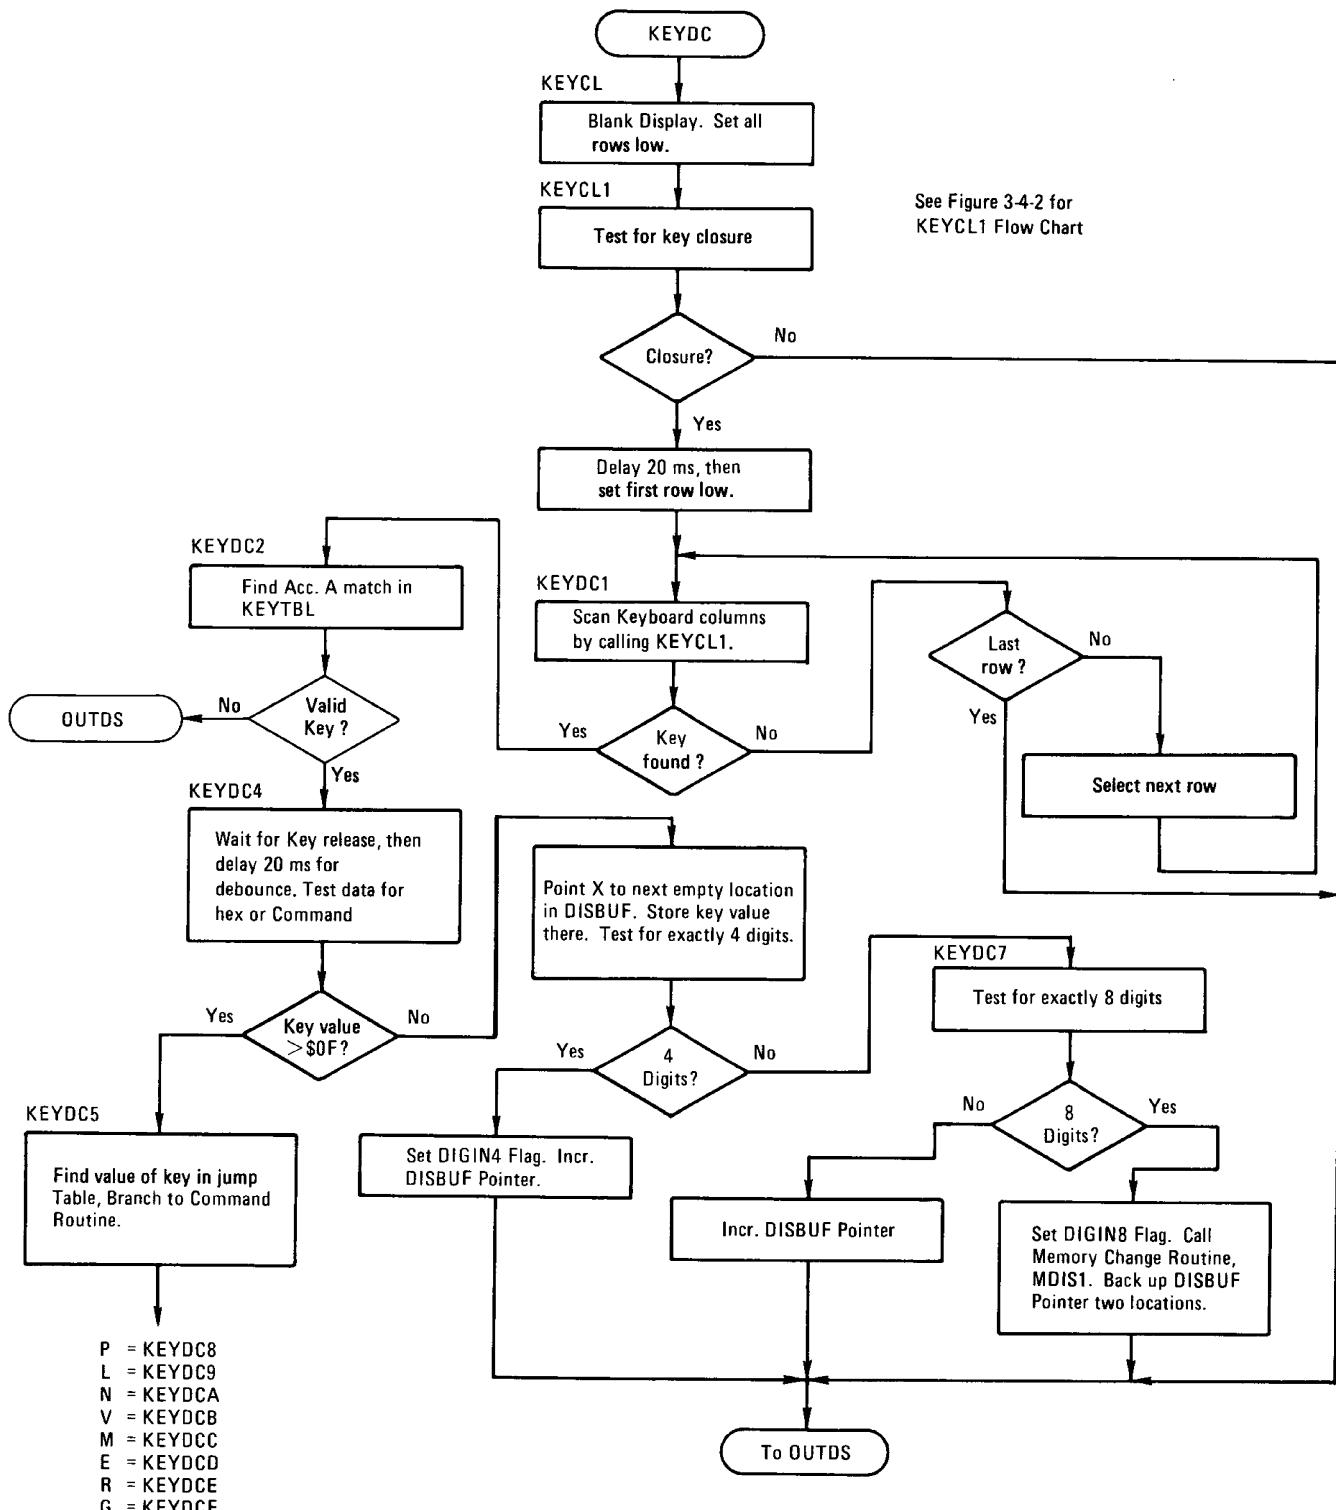
FIGURE 3-4-1. Program Flow for Keyboard Scan and Decode Routine

```
                    ( KEYCL1 )
                        │
                        ▼
        ┌───────────────────────────────┐
        │      Test selected column.     │◄─────────┐
        └───────────────────────────────┘          │
                        │                           │
                        ▼                           │
          Yes        ╱ Key ╲                        │
       ┌────────────◄  Closed? ►                    │
       │             ╲       ╱                      │
       │                 │ No                       │
       │                 ▼                          │
       │    ┌───────────────────────────┐           │
       │    │      Select next column.   │          │
       │    └───────────────────────────┘           │
       │                 │                          │
       │                 ▼                          │
       │              ╱ All  ╲                      │
       │             ╱Columns ╲        No           │
       │            ◄  tested ? ►──────────────────┘
       │             ╲        ╱
       │                 │ Yes
       │                 ▼
       │               ( RTS )
       └──────────────────►
```
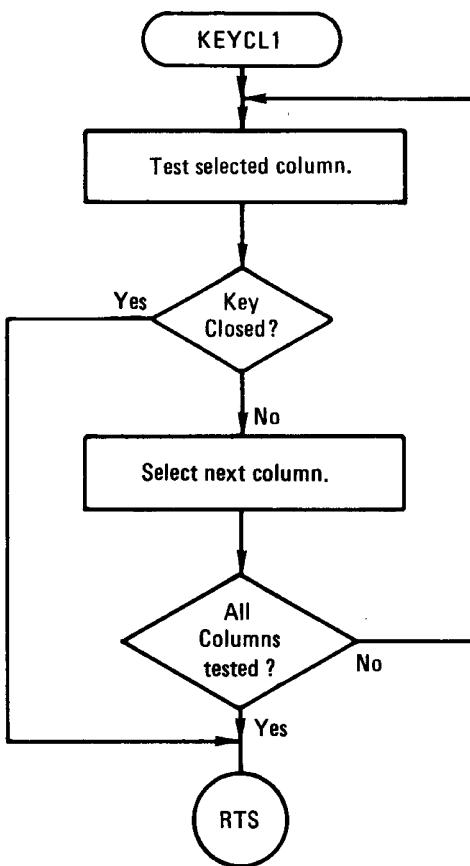
Returns with state of SCNREG
in Acc. A when key closure is
detected.

FIGURE 3-4-2. Program Flow for KEYCL1 Subroutine

3-5   MEMORY EXAMINE/CHANGE ROUTINE

Flow charts for the Display and Change Memory routines are shown in Figure 3-5-1. The Memory Display routine (MDIS, line 483) causes display of the contents of the memory location pointed to by the first four DISBUF locations. KEYBF, the pointer to the next empty location in DISBUF, is advanced by two in order to point to locations six and seven in DISBUF when new memory data is entered. The BLDX routine, via a jump through KEYD3F, builds a memory pointer from the data in the first four locations of DISBUF and loads it into the Index Register. The data from the location pointed to by X is loaded into Acc.A, split into nibbles (half-bytes or 4-bit words) by the MDIS2 subroutine, and stored in DISBUF locations four and five. Should a memory change be required, MDIS1 (line 496) is called, which gets the new data from locations six and seven in DISBUF (the keyboard entry) and stores it in the memory location referenced. A read of that location is then performed to get the actual data (someone might try to alter a ROM) which is put back in DISBUF+4 and DISBUF+5 to be displayed, giving the operator a visual indication that the change occurred. The Memory Increment Subroutine (MINC) is called when the G key is used to advance to the next memory location. This routine simply does a 16 bit increment of the four nibbles stored in the first four locations of DISBUF. MDIS is then called to display the contents of the incremented address.
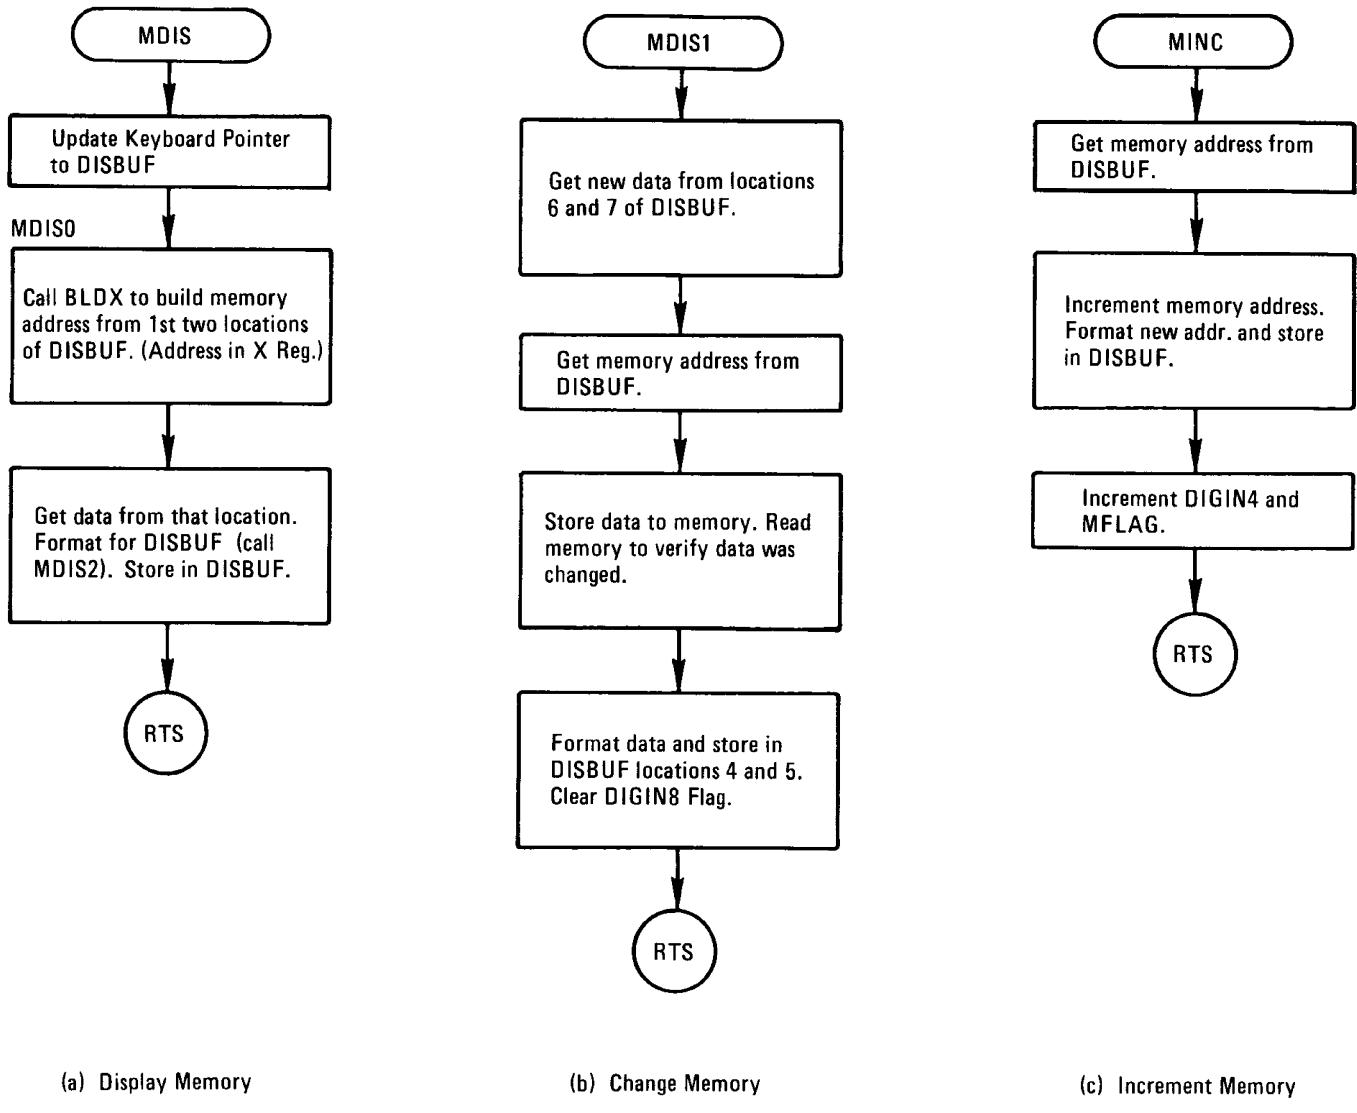
(a) Display Memory   **(b)** Change Memory   **(c)** Increment Memory

FIGURE 3-5-1. Program Flow for Memory Display, Change, and Increment

3-6   REGISTER DISPLAY/CHANGE ROUTINE

The subroutine to display the registers (REGST, flow chart in Figure 3-6-1) transfers the User's Registers from his stack (User's Stack Pointer is always saved in SP) to the display for operator inspection. The registers are displayed in the order they are stacked: PC, X, A, B, C. A new register can be selected by pressing the G key while in the Register Display mode. This causes the register display routine to be entered at REGST1 (line 556). TEMP2, a RAM buffer, is used as a counter in this routine to determine whether the register is one or two bytes long, and which register to display next.

The Program Counter is displayed first so that when the Register Display routine is called from the Trace or Breakpoint routine, the Program Counter appears automatically, allowing the operator to easily follow program flow. REGST points the Index Register to the top of the user's Stack where the high byte of the program counter is located. REGST1 clears the display buffer, DISBUF, and determines from the count in TEMP2 which register is to be displayed. When the count gets to 3, all registers have been displayed and the user's Stack Pointer is loaded from location SP and displayed.

3-8
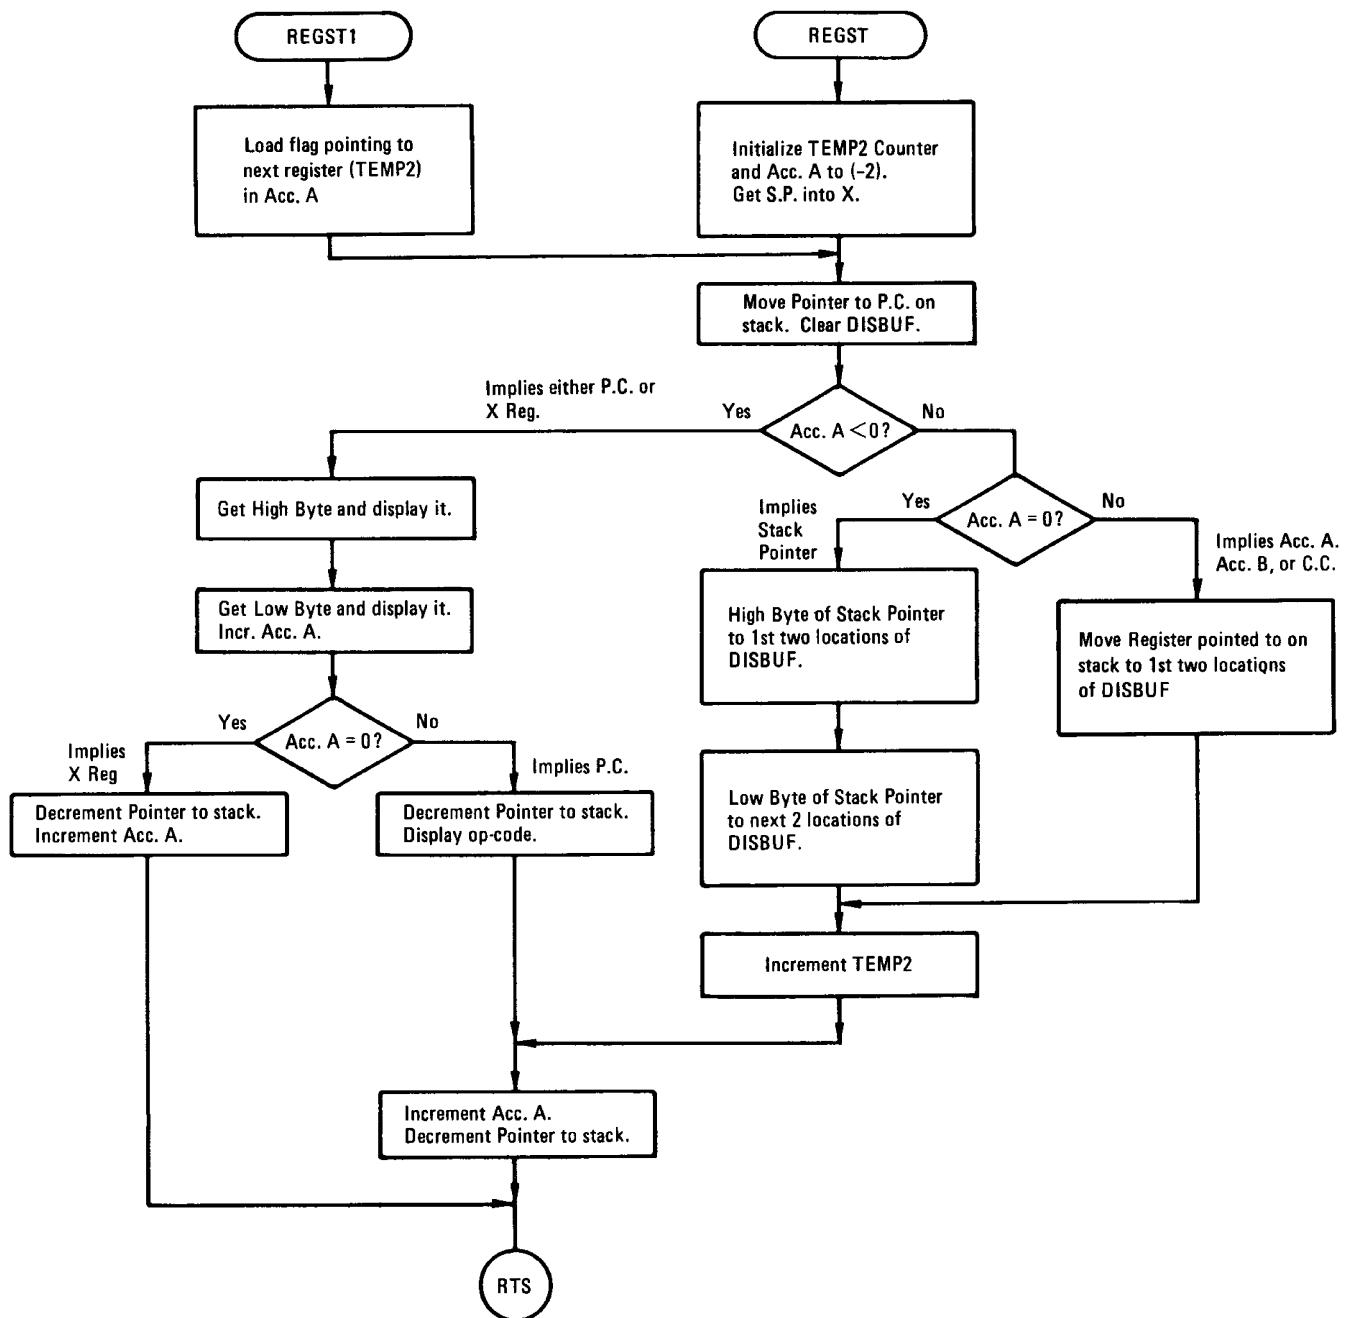
FIGURE 3-6-1. Program Flow for Register Display Function

3-7   PUNCH AND LOAD ROUTINES

The Punch routine (line 609, address $E32F, flow chart in Figure 3-7-1) is entered via a decode of a P key closure. Initially, the ACIA is reset causing the $\overline{RTS}$ signal to go low. This is followed by ACIA programming to set $\overline{RTS}$ high, establish eight bits for data length, no parity, and two stop bits. Additionally, the ACIA is set up to transmit serial data at one sixteenth of the clock frequency. A leader is then punched (using the PNLDR Subroutine) consisting of 1024 ones.

3-9
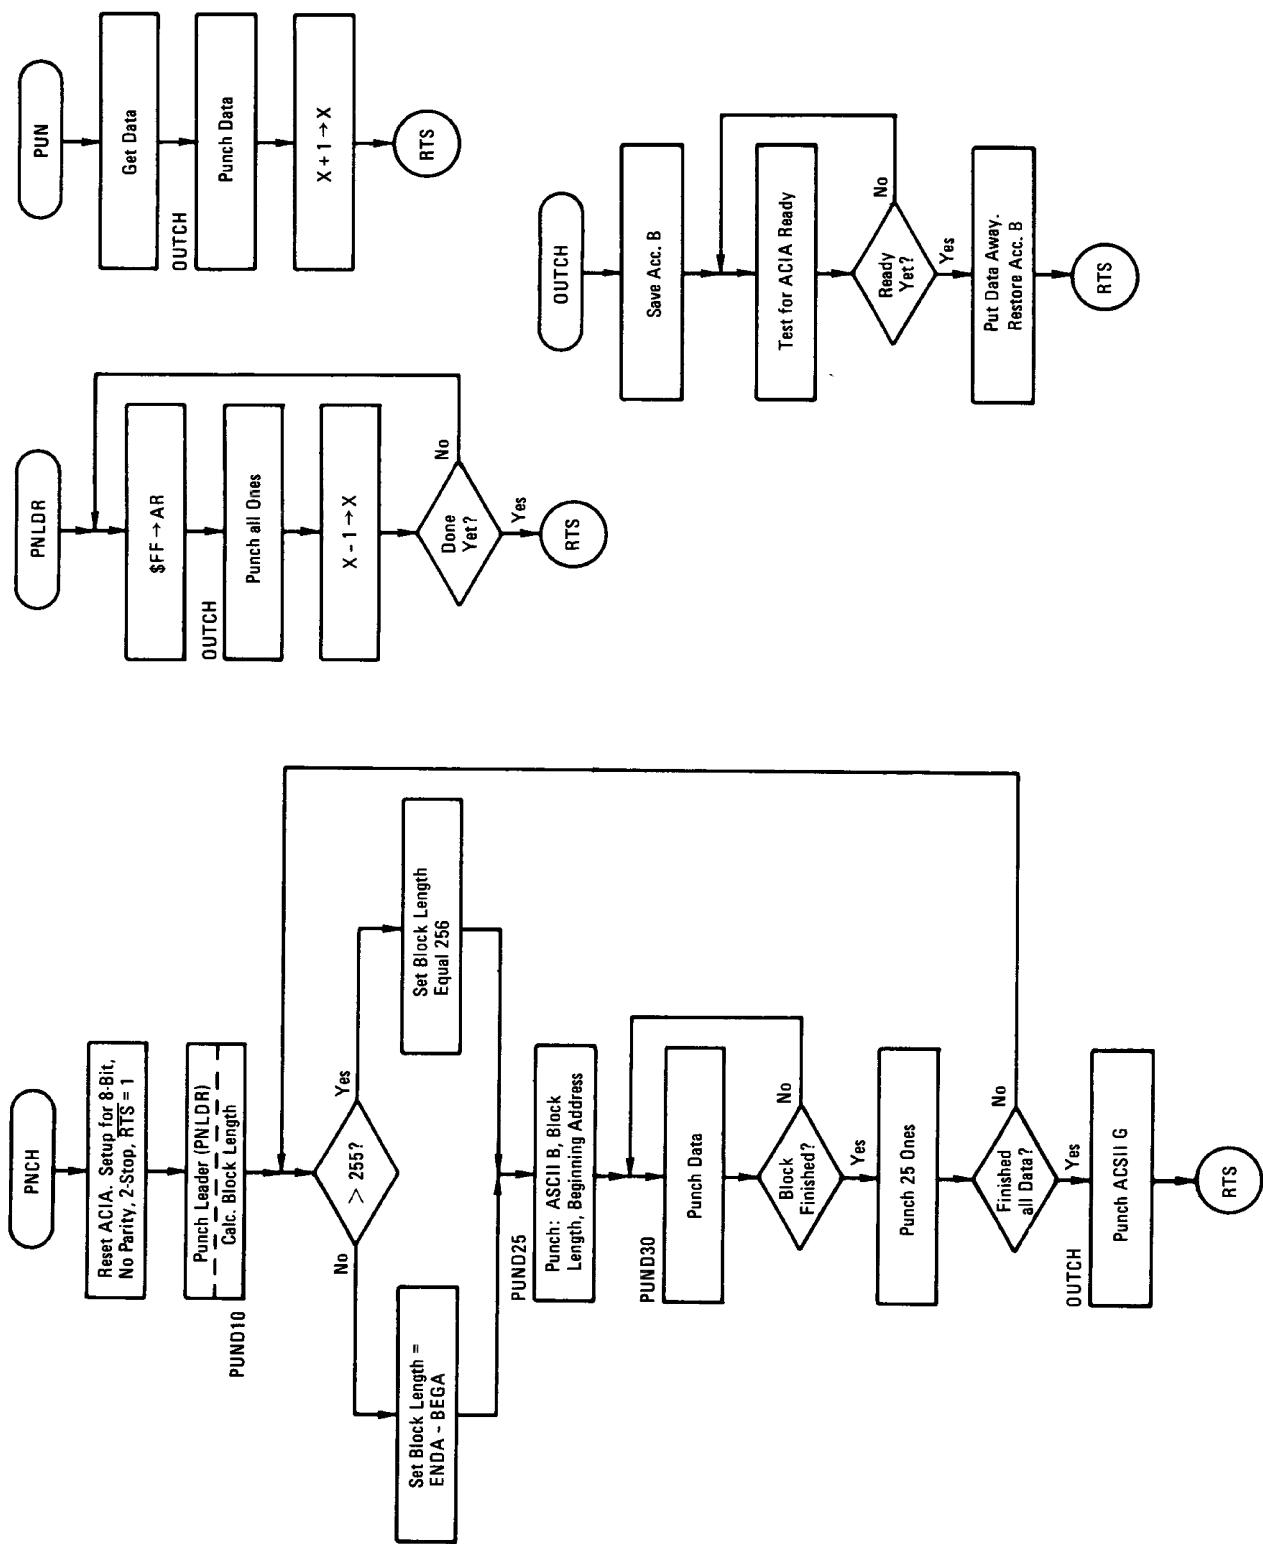
FIGURE 3-7-1. Program Flow for PUNCH Function

After the leader is punched, the program compares the beginning address (located in $A002, $A003) to the ending address (located in $A004, $A005). If the difference is greater than 256 (hex FF), the first block is assumed to be 256 bytes long. When the difference is less than 256, the block length is set equal to the difference.

Once this determination has been completed an ASCII "B" is punched on the tape. This is followed by the block length (one byte). The next information stored on the tape is the two byte beginning address of the data being put on the tape. After the block of data is outputted to the tape recorder, a leader of 25 ones data is put onto the tape. At this point the beginning address is again compared to the ending address in order to see if all the data has been punched. To provide a control to validate that all data has been recorded and for ease of recovery, an ASCII "G" is then punched on the tape. When the beginning address and the ending address are different, another block of data must be processed. This cycle is continued until the beginning and ending addresses are the same. Return to control is accomplished with an RTS instruction.

This routine destroys the beginning address originally put in the locations $A002 and $A003. When the punch routine is complete the data in the ending address is unchanged and the beginning address locations contain a value one greater than the end address.

The Load routine (line 674, address $E395, flow chart in Figure 3-7-2) is entered via a decode of an L key closure. This routine sets up the ACIA to receive data in the same format that is used by the Punch routine: data length equals 8 bits, no parity, two stop bits. The Receive Clock mode is set to divide-by-one and $\overline{RTS}$ is set low, indicating that the ACIA is now ready to receive data from the cassette interface circuitry.

Each data byte is brought in by calling the Input One Character routine, INCHR (line 699, address $E3C0). This routine continuously checks the ACIA's Status Register until there is an indication that a byte is ready to be transferred. The MPU then fetches the byte from the ACIA Data Receive Register and returns to the LOAD routine with the data in Acc. A. The data is then tested to determine if it is an ASCII "B" or "G". When a "B" is received, the program branches to the Read Data Block routine, RDBLCK. The block length is read and saved in Acc. B and the beginning address is read and stored into locations $A002 and $A003. Data in the current block is then brought in and stored to the indicated memory locations. After the block of data is read, the software branches back to the BILD Routine to look for another block of data or an end of file command. When other blocks of data are present in this file, they are processed as described above. Eventually, the end of file is reached. End of file recognition is accomplished by recognizing an ASCII "G" in the BILD routine. Recognition of ths "G" provides the means for orderly exit from this routine by the execution of the RTS instruction.

3-8   INTERRUPT HANDLING ROUTINES

The JBUG monitor program handles all three types of M6800 interrupts: Software Interrupt (SWI), Maskable Interrupt Request ($\overline{IRQ}$), and Non-Maskable Interrupt ($\overline{NMI}$). In handling interrupts, the MC6800 completes execution of its current instruction, saves the results on the stack and then outputs the appropriate vector address. At that address it expects to find the beginning address of the selected interrupt service routine (see the reference literature for more details). Beginning addresses of the service routines are placed in the vector locations during program development.

The $\overline{IRQ}$ interrupt is reserved for the user. In servicing an $\overline{IRQ}$ interrupt, the MPU fetches the address $E014 from memory locations $E3F8 and $E3F9 near the top of the JBUG ROM. Beginning at location $E014 (line 83), the MPU loads the Index Register with the contents of RAM locations $A000 and $A001, then

LOAD

Set up ACIA for 8-Bit;
No Parity; 2-Stop Bits;
RTS = 0;
Divide-by-One.

INCHR

Is Data Ready?   No

Yes

Get Character from ACIA and Save in Acc. A

RTS

RDBLCK

Get Block Length (INCHR)

Save in Acc. B as Byte Count

Get Starting Address (Next 2 char.) (INCHR)

Put Strt. Addr. in X for Memory Pointer and Save in $A002 & $A003

BILD

Get next Character (INCHR)

Test for Start-of-Block = "B" or End-of-File = "G" Characters

Yes   Is it a "B"?

No

Is it a "G"?   No

Yes

Get next Character (INCHR)

Store to Memory; Decr. Byte Cnt.

Done Yet?   No

Yes

RTS

FIGURE 3-7-2. Program Flow for LOAD Function

executes an indexed jump. This, in effect, maps the IRQ vector through the JBUG ROM, allowing the user to reach his interrupt service routine by loading its beginning address into RAM locations $A000 (high order byte) and $A001 (low order byte).

The MPU is directed to location $E019 (line 91) by NMI interrupts. The flow of the subroutine located there, NONMSK, is shown in Figure 3-8-1. NONMSK can be entered due to either a Trace command (breakpoints may be either active or clear) or because of an interrupt from the keyboard PIA, U21. If the interrupt was not a Trace command, then the trace flag, NFLAG, is cleared and the program flows to NONMK1 (line 100). The MPU loads the Index Register with the contents of memory locations $A006 and $A007 and then jumps to that location to begin executing the Keyboard Service Routine, KEYDC. This address was loaded into $A006 and $A007 during the Restart initialization sequence. The user may cause NMI interrupts to vector to other locations by loading the desired starting address into $A006 and $A007.
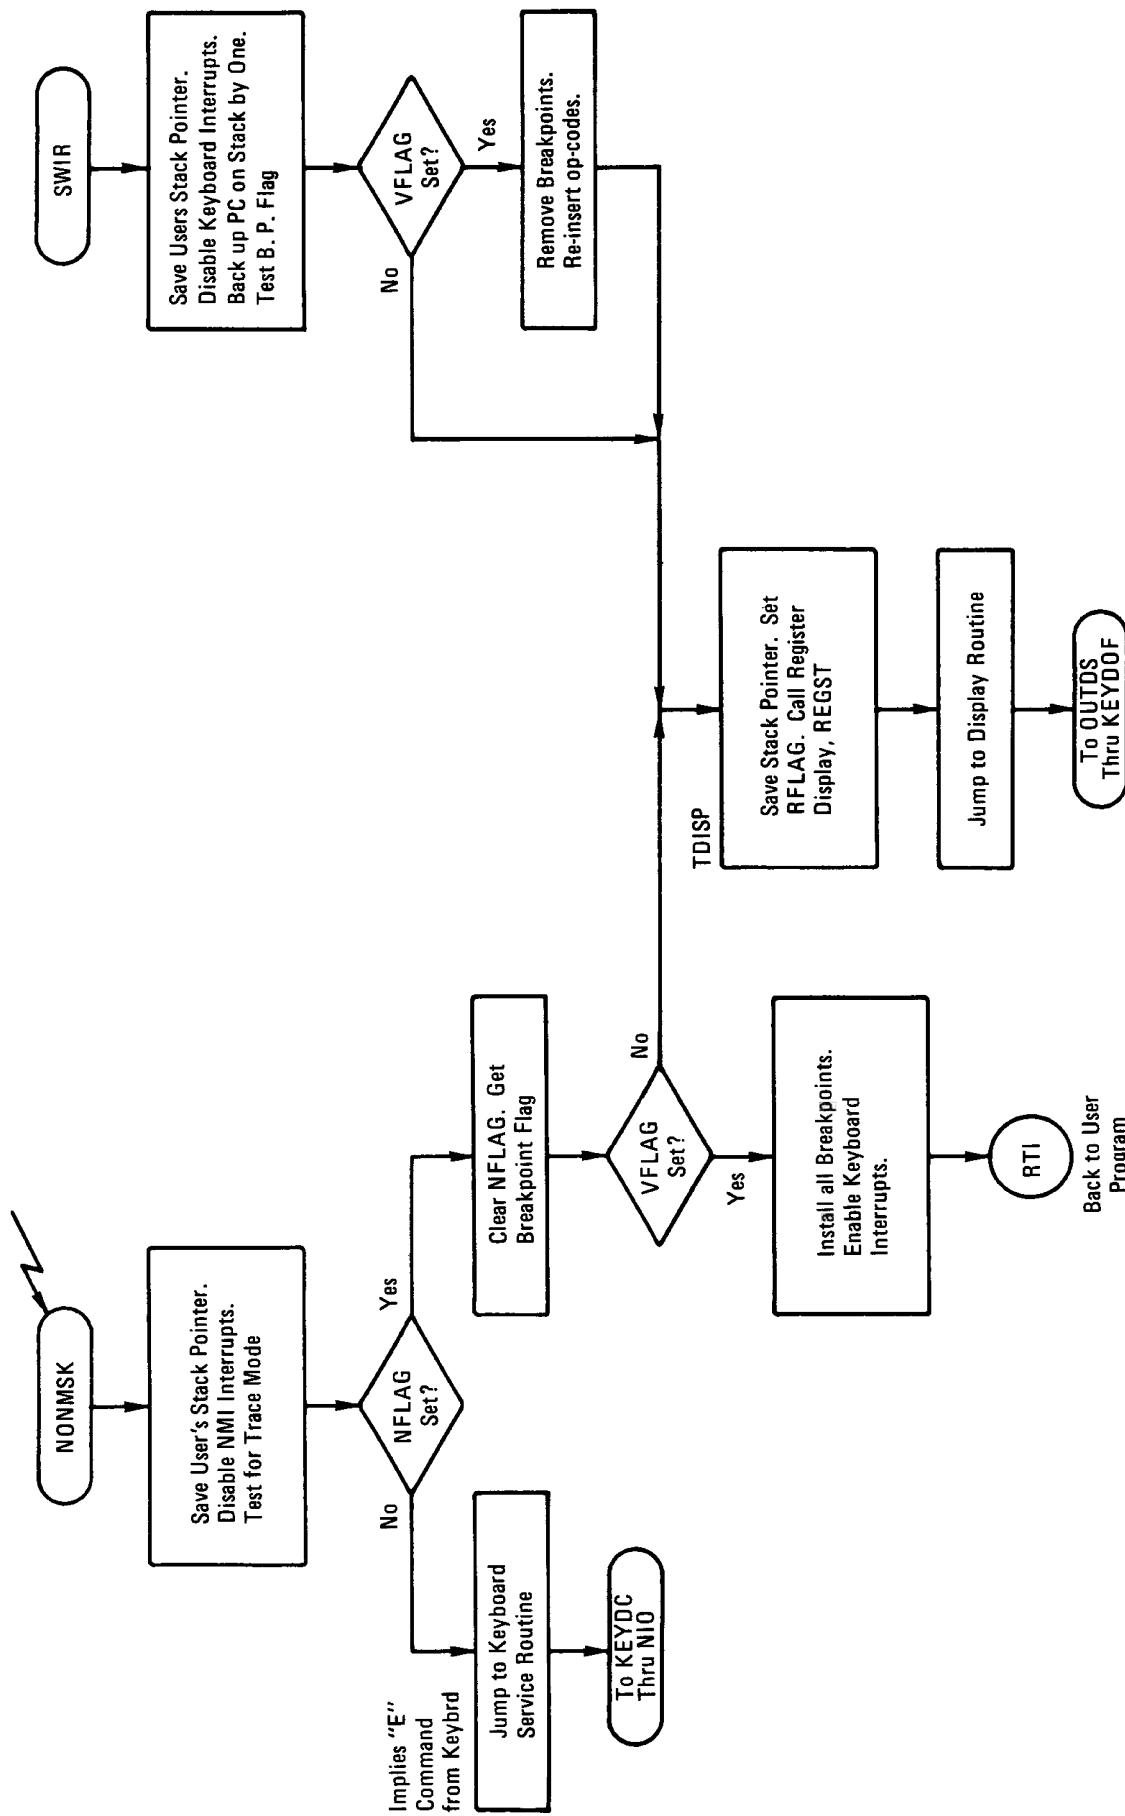
FIGURE 3-8-1. Program Flow for NMI and SWI Interrupt Handling

SWIR

Save Users Stack Pointer. Disable Keyboard Interrupts. Back up PC on Stack by One. Test B. P. Flag

VFLAG Set? — No / Yes

Remove Breakpoints. Re-insert op-codes.

TDISP

Save Stack Pointer. Set RFLAG. Call Register Display, REGST

Jump to Display Routine

To OUTDS Thru KEYDOF

NONMSK

Save User's Stack Pointer. Disable NMI Interrupts. Test for Trace Mode

NFLAG Set? — Yes / No

Clear NFLAG. Get Breakpoint Flag

VFLAG Set? — No / Yes

Install all Breakpoints. Enable Keyboard Interrupts.

RTI

Back to User Program

Implies "E" Command from Keybrd

Jump to Keyboard Service Routine

To KEYDC Thru NIO

3-13

If the Trace flag (NFLAG) was set, the program checks to see if breakpoints are active. If breakpoints are active, it is assumed that the purpose of the Trace command was to get off of a breakpoint. In this case, the breakpoints are installed, further keyboard interrupts are enabled, and flow is passed back to the user program by execution of an RTI instruction. If there were no active breakpoints, it is assumed that the Trace command was invoked in order to execute a single instruction. In this case, the stack pointer is saved in SP and then the program jumps to the Register Display Routine.

Software Interrupts (SWI) are used by the JBUG monitor to implement breakpoints (up to a maximum of five are allowed). Upon entry from a SWI instruction SWIR (line 107), the user's Stack Pointer is saved in location SP for use by the Register Display Routine. Keyboard interrupts are disabled so that the normal Keyboard and Display scanning functions do not cause multiple $\overline{\text{NMI}}$ interrupts. Lines 109-113 cause a 16 bit decrement of the Program Counter saved on the Stack so that it points back to the instruction that was replaced by the SWI used to make the breakpoint. The subroutine GETXB is called (line 145) to examine the VFLAG and determine if any breakpoints are set. If there are, TZONK removes all of the SWI instructions so that the operator doesn't see them. The address of the breakpoints and their op-codes are saved in the Breakpoint Table, BPTAB. The Register Display Routine is then called so that the operator can examine the registers on the stack.

APPENDIX 1
ASSEMBLY LISTING OF JBUG MONITOR

```
00001                       NAM     JBUG
00002                  * REV 1.8   9-6-76
00003                  *
00004                  *A MONITOR PROGRAM WITH AN INTERNAL KEYBOARD/DISPLAY
00005                  *
00006                  * ASSEMBLED ON THE EXORCISER FOR MOTOROLA
00007                  * INC. -- FALL OF 76
00008                  *
00009                  * COPYRIGHT 1976 BY MOTOROLA SPG
00010                  *
00011                       OPT     S,O          SYMBOL TABLE;OBJECT TAPE
00012                  *
00013                  *
00014                  *
00015                  **COMMAND SYMBOLS
00016                  ****P - PUNCH DESIGNATED MEMORY TO AUDIO CASSETTE
00017                  ****L - LOAD AUDIO CASSETTE TO MEMORY
00018                  ****N - TRACE ONE INSTRUCTION
00019                  *          USES NMI INTERUPT
00020                  *          N CLEARS ANY BRKPTS IF SET
00021                  *          SINCE TRACE USES HARDWARE IT CAN
00022                  *          TRACE THRU ROM AND INTERUPTS
00023                  ****V - SET AND CLEAR BREAKPOINTS (FIVE ALLOWED)
00024                  *          IF THE ADDRESS NOT= ZERO THEN A BRKPT
00025                  *          IS INSERTED AT THE ADDRESS. IF THE
00026                  *          ADDRESS = 0 THEN ALL 5 BRKPTS ARE CLEARED.
00027                  ****M - MEMORY EXAMINE AND CHANGE
00028                  ****E - ESCAPE (ABORT)
00029                  ****R - REGISTER DISPLAY
00030                  *          ORDER OF DISPLAY IS: PC,X,A,B,CC,SP
00031                  ****G - GO TO USERS PROGRAM/ADVANCE/PROCEED.
00032                  *          IF ADDRESS NOT = 0 SET USER'S PC TO
00033                  *          NEW VALUE AND GO TO USER'S PROGRAM.
00034                  *          IF ADDRESS=0 THEN RETURN TO PROGRAM AT
00035                  *          PREVIOUS LOCATION (PROCEED MODE).
00036                  *          IF IN R,G MEANS ADVANCE TO NEXT REGISTER.
00037                  *          IF IN M,G MEANS ADVANCE TO NEXT MEMORY.
00038                  *
00039                  *
00040                  *************************************************************
00041                  **CONTROL STACK AT $A078**
00042                  ** RAM STARTS AT $A000
00043                  ** ROM IS AT LOCATIONS $E000-$E3FF
00044                  ** ACIA IS AT $8008-8009
00045                  ** PIA IS AT $8020-8023
00046                  *************************************************************
00047                  *************************************************************
00048                  *
00049                  * THE RESTART ENTRY IS AT LABEL 'RESTAR' AT
00050                  * LOCATION $E08D.
00051                  *
00052                  *************************************************************
```

0

```
00054 E000                        ORG     $E000
00055                    ◆
00056                    ◆◆◆◆ROUTINE TO CALCULATE OFFSETS◆◆◆◆
00057                    ◆◆◆SETUP STACK AS FOLLOWS:
00058                    ◆    B-REG (SP+2) = HIGH BYTE OF DESTINATION ADDR
00059                    ◆    A-REG (SP+3) = LOW BYTE OF DEST ADDR
00060                    ◆    X-REG (SP+4,5) = ADDR OF OPCODE OF BRANCH
00061                    ◆                        INSTRUCTION
00062 E000 08               INX
00063 E001 FF A01E          STX     BPADR    STORE OFFSET ADDR
00064 E004 08               INX
00065 E005 FF A00A          STX     TEMP1    ADDR OF NEXT OP CODE
00066 E008 B0 A00B          SUB A   TEMP1+1  LOW BYTES
00067 E00B F2 A00A          SBC B   TEMP1    HIGH BYTES
00068 E00E FE A01E          LDX     BPADR    GET OFFSET ADDR
00069 E011 A7 00            STA A   0,X      CHANGE OFFSET
00070 E013 3F               SWI              STACK AND DISPLAY
00071                    ◆◆◆REGISTERS ON STACK CONTAIN THE FOLLOWING:
00072                    ◆◆◆◆◆INDEX - ADDR OF OFFSET BYTE THAT WAS CHANGED
00073                    ◆◆◆◆◆A ACCM - VALUE OF OFFSET
00074                    ◆◆◆◆◆B ACCM - 00 - FORWARD BRANCH WITHIN RANGE
00075                    ◆◆◆◆◆          FF - REVERSE BRANCH WITHIN RANGE
00076                    ◆◆◆◆◆          -ANY OTHER VALUE IMPLIES A BRANCH
00077                    ◆◆◆◆◆             OUT OF RANGE.
00078                    ◆◆◆◆◆◆◆◆◆◆◆◆◆◆◆◆◆◆◆◆◆◆◆◆◆◆◆◆◆◆◆◆◆◆◆◆◆◆◆◆◆◆◆◆◆◆◆◆◆◆◆◆
00079                    ◆
00080                    ◆ HERE ON IRQ INTERUPT
00081                    ◆
00082                    ◆◆◆◆IRQ INTERRUPT SERVICE◆◆◆◆
00083 E014 FE A000 IO     LDX     IOV      PICK UP PSEUDO VECTOR
00084 E017 6E 00          JMP     X        GO TO IT
00085                    ◆
00086                    ◆ HERE ON NMI INTERUPT
00087                    ◆    MAY BE TRACE OR A TRACE TO PROCEED
00088                    ◆    OR A KEYBOARD INTERUPT.
00089                    ◆
00090                    ◆◆◆◆NMI INTERRUPT SERVICE◆◆◆◆
00091 E019 BF A008 NONMSK STS    SP       SAVE USER'S STACK PTR
00092 E01C 8D 66          BSR    DISNMI    DISABLE NMI INTERUPTS
00093 E01E 7D A018        TST    NFLAG     TRACE MODE?
00094 E021 27 0A          BEQ    NONMK1    NO
00095 E023 7F A018 TNMI   CLR    NFLAG     RESET FLAG
00096 E026 8D 3B          BSR    GETXB     GET TAB ADDR AND VFLAG
00097 E028 27 2E          BEQ    TDISP     NO BP, DISPLAY REGS
00098 E02A 7E E236        JMP    TGB       BP ACTIVE
00099                    ◆ MUST BE KEYBOARD INTERUPT
00100 E02D FE A006 NONMK1 LDX   NIO
00101 E030 6E 00          JMP    X        DECODE KEYBOARD
00102                    ◆
00103                    ◆ HERE ON SOFTWARE INTERUPT
00104                    ◆    USUALLY A BREAKPOINT
00105                    ◆
00106                    ◆◆◆◆SWI SERVICE ROUTINE◆◆◆◆
00107 E032 BF A008 SWIR   STS    SP       SAVE USER'S SP
```

```
00108 E035 8D 4D                    BSR      DISNMI     DISABLE NMI INTERRUPTS
00109 E037 30                       TSX                 DECR PC BY 1
00110 E038 6D 06                    TST      6,X        BACKUP PC ON STACK
00111 E03A 26 02                    BNE      *+4
00112 E03C 6A 05                    DEC      5,X
00113 E03E 6A 06                    DEC      6,X
00114 E040 8D 21                    BSR      GETXB      GET TAB ADDR AND VFLAG
00115 E042 27 14                    BEQ      TDISP      NO BRKPTS, GO DISPLAY REGS
00116                        *
00117                        * REMOVE BRKPTS WHILE WE ARE IN JBUG. THEY
00118                        * WILL BE RESTORED ON A GO OR PROCEED
00119                        *
00120                        ******HERE TO REMOVE BREAKPOINTS******
00121 E044 FF A01E TZONK     STX      BPADR      SAVE IN TEMP
00122 E047 A6 02             LDA A    2,X        GET OP CODE TO RESTORE
00123                        * SAFEGUARD AGAINST MULTI DEFINED BRKPTS
00124                        *
00125 E049 81 3F             CMP A    #$3F
00126 E04B 27 07             BEQ      GENA       BRANCH IF MULTI-DEF
00127 E04D EE 00             LDX      0,X        GET ADDR OF BKPT
00128 E04F A7 00             STA A    0,X        RESTORE OP CODE
00129 E051 FE A01E           LDX      BPADR      GET TABLE POSITION
00130 E054 8D 08   GENA      BSR      ADD3X      GET NEXT POSITION AND DECB
00131 E056 26 EC             BNE      TZONK      GO AGAIN
00132 E058 BF A008 TDISP     STS      SP         SAVE USER'S STACK POINTER
00133 E05B 7E E206           JMP      KEYDCE     GO DISPLAY REGS
00134                        *
00135                        ****SUBROUTINE TO GET NEXT TABLE ENTRY
00136                        *
00137 E05E 08     ADD3X      INX
00138 E05F 08                INX
00139 E060 08                INX
00140 E061 5A                DEC B               DECR CTR
00141 E062 39                RTS                 LET CALLER DO CTR CHECK
00142                        *
00143                        ****SUB TO GET TABLE ADDR IN X VFLAG IN B
00144                        *
00145 E063 CE A022 GETXB     LDX      #BPTAB     GET TABLE BASE ADDR
00146 E066 F6 A01D           LDA B    VFLAG
00147 E069 39                RTS
00148                        *
00149                        **SUBROUTINE TO SET A BREAKPOINT (MAKE AN
00150                        ****ENTRY INTO BREAKPOINT TABLE) IF ENOUGH
00151                        ****SPACE EXISTS
00152                        *    THE ACTUAL BRKPTS ARE PUT IN MEMORY
00153                        *    ON THE 'G' COMMAND
00154                        *
00155 E06A 8D F7   SETBR     BSR      GETXB      GET TAB ADDR AND VFLAG
00156 E06C 27 08             BEQ      TZOT       NO BKPTS, GO INSERT ONE
00157 E06E C1 05             CMP B    #$5        ENOUGH ROOM?
00158 E070 2C 52             BGE      CLRDS      NO, CLEAR DISPLAY AND RTS
00159                        ******GET TO FIRST FREE SPACE IN TABLE******
00160 E072 8D EA   TPIG      BSR      ADD3X      ADD 3 TO X AND DECB
00161 E074 26 FC             BNE      TPIG       BRANCH IF NOT DONE
```

```
00162                      ******INSERT NEW BKPT IN TABLE*****
00163 E076 7C A01D TZOT    INC     VFLAG     INCR FLAG
00164 E079 B6 A01E         LDA A   BPADR     INSERT IN TABLE
00165 E07C A7 00           STA A   0,X
00166 E07E B6 A01F         LDA A   BPADR+1
00167 E081 A7 01           STA A   1,X
00168 E083 39              RTS
00169                  *
00170                      ****SUBROUTINE TO DISABLE NMI INTERRUPTS****
00171                  *
00172 E084 86 3C   DISNMI LDA A   #$3C
00173 E086 B7 8021         STA A   DISCTR    INTR MASKED CA1 ACTIVE LOW
00174 E089 B7 8023         STA A   SCNCTR    INTR MASKED CB1 ACTIVE LOW
00175 E08C 39              RTS
00176                  *
00177                  *
00178                      ****RESTART ROUTINE****
00179                  *
00180                  *
00181 E08D 8E A078 RESTAR LDS     #$A078
00182 E090 BF A008         STS     SP        INITALIZE STACK POINTER
00183 E093 CE E14E         LDX     #KEYDC    GO DECODE KEYBOARD
00184 E096 FF A006         STX     NIO       INITALIZE NMI INTERRUPT
00185                  *INITALIZE KEYBOARD/DISPLAY PIA
00186 E099 86 FF          LDA A   #$FF
00187 E09B B7 8022         STA A   SCNREG    PB0-PB7 OUTPUTS
00188 E09E 44              LSR A
00189 E09F B7 8020         STA A   DISREG    PA0-PA6 OUTPUTS,PA7 INPUT
00190 E0A2 8D E0          BSR     DISNMI    DISABLE KEYBOARD/TRACE
00191                  **INITALIZE ACIA**
00192 E0A4 86 03          LDA A   #3
00193 E0A6 B7 8008         STA A   ACIAS     RESET THE ACIA
00194 E0A9 7F A01D         CLR     VFLAG     INITALIZE VFLAG
00195 E0AC 8D 04   INIT    BSR     CLFLG     CLEAR DISPLAY AND FLAGS
00196 E0AE 8D 27          BSR     HDR       WRITE PROMPT "-"
00197 E0B0 20 4C          BRA     OUTDS
00198                  *
00199                      ****SUBROUTINE TO CLEAR DISPLAY BUFFER AND FLAGS****
00200                  *
00201 E0B2 CE A014 CLFLG  LDX     #DIGIN4
00202 E0B5 4F             CLR A             CLEARS DIGIN4 AND DIGIN8
00203 E0B6 A7 00   CLFLG1 STA A   0,X       CLEARS MFLAG AND RFLAG
00204 E0B8 08             INX               CLEARS NFLAG AND TEMP2
00205 E0B9 8C A01A         CPX     #DIGIN4+6 END?
00206 E0BC 26 F8          BNE     CLFLG1    NO LOOP BACK
00207 E0BE CE A00C         LDX     #DISBUF
00208 E0C1 FF A01A         STX     XKEYBF    INITALIZE XKEYBF
00209 E0C4 86 7F   CLRDS  LDA A   #$7F
00210 E0C6 B7 8020         STA A   DISREG    BLANK DISPLAY
00211 E0C9 86 11          LDA A   #17
00212 E0CB CE A00C         LDX     #DISBUF
00213 E0CE A7 00   CLRDS1 STA A   0,X       CLEAR OUT DISPLAY BUFFER
00214 E0D0 08             INX
00215 E0D1 8C A014         CPX     #DISBUF+8 END?
```

```
00216 E0D4 26 F8              BNE     CLRDS1
00217 E0D6 39                 RTS
00218                      ◆
00219                      ◆SUBROUTINE TO WRITE PROMPT ON DISPLAY
00220                      ◆
00221 E0D7 86 10     HDR      LDA A  #16
00222 E0D9 B7 A00C            STA A  DISBUF    OUTPUT -
00223 E0DC 39                 RTS
00224                      ◆
00225                      ◆SUBROUTINE TO DELAY 20 MS OR X MS
00226                      ◆   WHEN ENTERING AT DLY1 THE XREG MUST CONTAIN
00227                      ◆   THE DESIRED DELAY CT (APX 13USEC/COUNT)
00228                      ◆
00229 E0DD CE 0600   DLY20    LDX     #$0600
00230 E0E0 09        DLY1     DEX
00231 E0E1 26 FD              BNE     DLY1
00232 E0E3 39                 RTS
00233                      ◆
00234                      ◆◆◆◆SUBROUTINE TO BUILD TWO BYTE ADDRESS FROM
00235                      ◆◆◆◆◆◆FIRST LOCATIONS OF DISBUF
00236                      ◆   ADDRESS IS IN X-REG AND 'BPADR' ON EXIT
00237                      ◆
00238 E0E4 CE A00C   BLDX     LDX     #DISBUF
00239 E0E7 A6 00              LDA A  0,X       GET FIRST BYTE
00240 E0E9 48                 ASL A
00241 E0EA 48                 ASL A
00242 E0EB 48                 ASL A
00243 E0EC 48                 ASL A           MOVE TO HIGH NIBBLE
00244 E0ED AA 01              ORA A  1,X       OR WITH LOW NIBBLE
00245 E0EF A7 12              STA A  BPADR-DISBUF,X  STORE IN BPADR
00246 E0F1 A6 02              LDA A  2,X       GET SECOND BYTE
00247 E0F3 48                 ASL A
00248 E0F4 48                 ASL A
00249 E0F5 48                 ASL A
00250 E0F6 48                 ASL A           MOVE TO HIGH NIBBLE
00251 E0F7 AA 03              ORA A  3,X       OR WITH LOW NIBBLE
00252 E0F9 A7 13              STA A  BPADR+1-DISBUF,X   STORE IN BPADR+1
00253 E0FB EE 12              LDX     BPADR-DISBUF,X  ADDRESS TO XREG
00254 E0FD 39                 RTS
00255                      ◆
00256                      ◆
00257                      ◆◆◆◆ROUTINE TO DISPLAY 6 DIGITS IN DISBUF
00258                      ◆
00259                      ◆
00260 E0FE CE A00C   OUTDS    LDX     #DISBUF  GET STARTING ADDRESS
00261 E101 A6 00     OUTDS1   LDA A  0,X       GET FIRST DIGIT
00262 E103 4C                 INC A
00263 E104 08                 INX
00264 E105 FF A020            STX     XDSBUF   SAVE POINTER
00265 E108 CE E3C9            LDX     #DIGTBL-1
00266 E10B 08        OUTDS2   INX
00267 E10C 4A                 DEC A            POINT TO PATTERN
00268 E10D 26 FC              BNE     OUTDS2
00269 E10F 7F 8022            CLR     SCNREG   BLANK DISPLAY
```

```
00270 E112 A6 00              LDA A   0,X         GET PATTERN
00271 E114 B7 8020            STA A   DISREG      SET UP SEGMENTS
00272 E117 B6 A01C            LDA A   SCNCNT
00273 E11A B7 8022            STA A   SCNREG      SELECT DIGIT
00274 E11D CE 004D            LDX     #$4D        SETUP FOR 1MS DELAY
00275 E120 8D BE              BSR     DLY1        DELAY 1 MS
00276 E122 FE A020            LDX     XDSBUF      RECOVER POINTER
00277 E125 8C A012            CPX     #DISBUF+6
00278 E128 27 1F              BEQ     OUTDS3
00279 E12A 74 A01C            LSR     SCNCNT      NO,MOVE TO NEXT DIGIT
00280 E12D 20 D2              BRA     OUTDS1
00281                      ◆
00282                      ◆◆◆◆SUBROUTINE TO SCAN KEYBOARD◆◆◆◆
00283                      ◆
00284 E12F 86 FF      KEYCL   LDA A   #$FF
00285 E131 CE 8020            LDX     #DISREG
00286 E134 A7 00              STA A   0,X         BLANK DISPLAY
00287 E136 86 3F              LDA A   #$3F
00288 E138 A7 02              STA A   2,X         ALL ROWS LOW
00289 E13A A6 02      KEYCL1  LDA A   2,X
00290 E13C 6D 00              TST     0,X
00291 E13E 2A 08              BPL     KEYCL2      KEY DOWN?
00292 E140 8B 40              ADD A   #64
00293 E142 A7 02              STA A   2,X         SELECT NEXT COLUMN
00294 E144 84 C0              AND A   #$C0
00295 E146 26 F2              BNE     KEYCL1      LAST COLUMN SCANNED?
00296 E148 39        KEYCL2  RTS                 NO KEY FOUND
00297 E149 86 20      OUTDS3  LDA A   #$20
00298 E14B B7 A01C            STA A   SCNCNT      INITALIZE SCNCNT
00299                      ◆
00300                      ◆◆◆◆ROUTINE TO SCAN AND DECODE KEYBOARD◆◆◆◆
00301                      ◆
00302 E14E 8D DF      KEYDC   BSR     KEYCL
00303 E150 27 AC              BEQ     OUTDS       NO KEY CLOSED
00304 E152 8D 89              BSR     DLY20
00305 E154 CE 8020 .          LDX     #DISREG     RESTORE X
00306 E157 86 01              LDA A   #$01        SETUP SCAN FOR FIRST ROW
00307 E159 A7 02              STA A   2,X
00308 E15B 8D DD      KEYDC1  BSR     KEYCL1      SCAN KEYBOARD,GET KEY
00309 E15D 26 0A              BNE     KEYDC2      KEY FOUND
00310 E15F A6 02              LDA A   2,X         CLEARS NMI INTERRUPT
00311 E161 81 20              CMP A   #$20
00312 E163 27 99              BEQ     OUTDS       LAST ROW
00313 E165 68 02              ASL     2,X         SHIFT LEFT
00314 E167 20 F2              BRA     KEYDC1
00315 E169 5F        KEYDC2  CLR B               INITALIZE COUNTER
00316 E16A CE E3DC            LDX     #KEYTBL
00317 E16D A1 00      KEYDC3  CMP A   0,X         SEARCH TABLE
00318 E16F 27 09              BEQ     KEYDC4
00319 E171 8C E3F4            CPX     #KEYTBL+24  END OF TABLE?
00320 E174 27 61              BEQ     KEYDOF      NO KEY FOUND IN TABLE
00321 E176 08                INX
00322 E177 5C                INC B               ADVANCE
00323 E178 20 F3              BRA     KEYDC3
```

```
00324 E17A 8D B3   KEYDC4 BSR      KEYCL     WAIT FOR KEY RELEASE
00325 E17C 26 FC          BNE      KEYDC4
00326 E17E BD E0DD         JSR      DLY20     DELAY 20 MSEC
00327 E181 C1 0F          CMP B    #$0F
00328 E183 2E 27          BGT      KEYDC5
00329 E185 FE A01A         LDX      XKEYBF    POINTER IN DISBUF
00330 E188 E7 00          STA B    0,X       STORE KEY VALUE
00331 E18A 8C A00F         CPX      #DISBUF+3  4 DIGITS IN?
00332 E18D 26 09          BNE      KEYDC7    NO
00333 E18F 7C A014         INC      DIGIN4    YES
00334 E192 08      KEYDC6 INX
00335 E193 FF A01A         STX      XKEYBF
00336 E196 20 3F          BRA      KEYDOF
00337 E198 8C A013 KEYDC7 CPX      #DISBUF+7  8 DIGITS IN?
00338 E19B 26 F5          BNE      KEYDC6
00339 E19D 7C A015         INC      DIGIN8    SET FLAG
00340 E1A0 BD E27E         JSR      MDIS1     DISPLAY NEW DATA
00341 E1A3 FE A01A         LDX      XKEYBF
00342 E1A6 09             DEX                BACK UP POINTER
00343 E1A7 FF A01A         STX      XKEYBF    SAVE
00344 E1AA 20 2B          BRA      KEYDOF
00345                 ◆
00346                 ◆ HERE TO DISPATCH TO A KEYBOARD OPTION
00347                 ◆◆
00348                 ◆
00349 E1AC CE E196 KEYDC5 LDX      #JMPTAB-32
00350 E1AF 08      KYDC5  INX                GET TO ADDRESS IN JUMP TABLE
00351 E1B0 08             INX
00352 E1B1 5A             DEC B
00353 E1B2 26 FB          BNE      KYDC5     THIS ONE?
00354 E1B4 6E 00          JMP      0,X       YES
00355 E1B6 20 0E   JMPTAB BRA      KEYDC8    P KEY
00356 E1B8 20 14          BRA      KEYDC9    L KEY
00357 E1BA 20 1E          BRA      KEYDCA    N KEY
00358 E1BC 20 28          BRA      KEYDCB    V KEY
00359 E1BE 20 37          BRA      KEYDCC    M KEY
00360 E1C0 20 41          BRA      KEYDCD    E KEY
00361 E1C2 20 42          BRA      KEYDCE    R KEY
00362 E1C4 20 48          BRA      KEYDCF    G KEY
00363                 ◆
00364                 ◆ HERE ON P KEY
00365                 ◆    PUNCH MEMORY TO AUDIO CASSETTE
00366                 ◆
00367 E1C6 BD E0C4 KEYDC8 JSR      CLRDS     CLEAR DISPLAY
00368 E1C9 BD E32F         JSR      PNCH      PUNCH DATA TO CASSETTE
00369 E1CC 20 06          BRA      KEYDCH
00370                 ◆
00371                 ◆ HERE ON L KEY
00372                 ◆    LOAD MEMORY FROM AUDIO CASSETTE
00373                 ◆
00374 E1CE BD E0C4 KEYDC9 JSR      CLRDS     CLEAR DISPLAY
00375 E1D1 BD E395         JSR      LOAD      LOAD DATA FROM CASSETTE
00376 E1D4 BD E0D7 KEYDCH JSR      HDR       WRITE HEADER
00377                 ◆ RETURN TO DISPLAY HEADER
```

```
00378 E1D7 7E E0FE KEYDOF JMP     OUTDS     DISPLAY HEADER
00379                      ◆
00380                      ◆ HERE ON N KEY
00381                      ◆   TRACE ONE INSTRUCTION
00382                      ◆
00383 E1DA 7F A01D KEYDCA CLR     VFLAG
00384 E1DD 7C A018 TRACE  INC     NFLAG
00385 E1E0 86 34          LDA A   #$34      SET UP HARDWARE TO TRACE
00386 E1E2 B7 8021        STA A   DISCTR    CA2 LOW START TRACE
00387 E1E5 3B             RTI
00388                      ◆
00389                      ◆ HERE ON V KEY
00390                      ◆   IF ADDRESS HAS 4 DIGITS INSERT A BRKPT
00391                      ◆   AT ADDRESS OTHERWISE CLEAR ALL 5 BRKPTS
00392                      ◆
00393 E1E6 7D A014 KEYDCB TST     DIGIN4    4 DIGITS IN?
00394 E1E9 26 05          BNE     ◆+7       YES, INSERT BP
00395 E1EB 7F A01D        CLR     VFLAG
00396 E1EE 20 E7          BRA     KEYDOF    GO DISPLAY
00397 E1F0 8D 74          BSR     KEYD3F    YES, INSERT BREAKPOINT
00398 E1F2 BD E06A        JSR     SETBR
00399 E1F5 20 E0          BRA     KEYDOF
00400                      ◆
00401                      ◆ HERE ON M KEY
00402                      ◆   DISPLAY MEMORY CONTENTS
00403                      ◆
00404 E1F7 7C A016 KEYDCC INC     MFLAG     SET FLAG
00405 E1FA 7D A014        TST     DIGIN4    4 DIGITS IN?
00406 E1FD 27 D8          BEQ     KEYDOF    NO
00407 E1FF 8D 68          BSR     MDIS      YES,DISPLAY MEMORY
00408 E201 20 D4          BRA     KEYDOF
00409                      ◆
00410                      ◆ HERE ON E KEY
00411                      ◆   ESCAPE (ABORT) USER PGM
00412                      ◆
00413 E203 7E E0AC KEYDCD JMP     INIT      CLEAR DISPLAY AND FLAGS
00414                      ◆
00415                      ◆ HERE ON R KEY
00416                      ◆   DISPLAY USER REGISTERS
00417                      ◆
00418 E206 7C A017 KEYDCE INC     RFLAG     REGISTER DISPLAY
00419 E209 BD E2C6        JSR     REGST
00420                      ◆ MUTUAL RETURN TO DISPLAY
00421 E20C 20 C9   KEYDCG BRA     KEYDOF
00422                      ◆
00423                      ◆ HERE ON G KEY
00424                      ◆   IF IN 'M' DISPLAY NEXT MEMORY LOCATION
00425                      ◆   IF IN 'R' DISPLAY NEXT REGISTER
00426                      ◆   IF 4 DIGIT ADDRESS WAS PUNCHED GO TO
00427                      ◆       ADDRESS IN USER PROGRAM
00428                      ◆   IF 4 DIGITS WEREN'T INPUT RETURN TO USERS
00429                      ◆       PGM AT CURRENT USER PC (PROCEED)
00430                      ◆
00431 E20E 7D A016 KEYDCF TST     MFLAG     MEMORY MODE?
```

```
00432 E211 26 48              BNE      KEYD1F    YES
00433 E213 7D A017            TST      RFLAG
00434 E216 26 49              BNE      KEYD2F
00435                    ◆ IS IT A 'GO' OR 'PROCEED'?
00436 E218 7D A014            TST      DIGIN4    4 DIGITS IN?
00437 E21B 26 07              BNE      KEYDCJ    NO, PROCEED MODE
00438                    ◆ HERE ON PROCEED
00439 E21D BD E063            JSR      GETXB     GET ADDR AND VFLAG
00440 E220 27 2B              BEQ      TGC       BRANCH IF NO BREAKPOINTS
00441 E222 20 B9              BRA      TRACE     GO TRACE
00442                    ◆ HERE ON GO MODE
00443 E224 8D 40    KEYDCJ    BSR      KEYD3F    GET ADDR
00444 E226 30                 TSX
00445 E227 A7 06              STA A    6,X       MODIFY LOW BYTE
00446 E229 F6 A01E            LDA B    BPADR     GET LOW BYTE
00447 E22C E7 05              STA B    5,X       MODIFY HIGH BYTE
00448 E22E BD E0C4            JSR      CLRDS     CLEAR DISPLAY
00449 E231 BD E063            JSR      GETXB     GET TAB ADDR&VFLAG
00450 E234 27 17              BEQ      TGC       BRANCH IF NO  BP
00451                    ◆◆◆◆INSTALL ALL BREAKPOINTS◆◆◆◆
00452 E236 FF A01E  TGB       STX      BPADR     SAVE IN TEMP
00453 E239 EE 00              LDX      0,X       GET ADDR OF BP
00454 E23B A6 00              LDA A    0,X       GET OP-CODE
00455 E23D 36                 PSH A              SAVE
00456 E23E 86 3F              LDA A    #$3F      INSTALL A SWI
00457 E240 A7 00              STA A    0,X
00458 E242 FE A01E            LDX      BPADR     GET BACK CURR TAB LOC
00459 E245 32                 PUL A              GET BACK OP-CODE
00460 E246 A7 02              STA A    2,X       SAVE IT IN A TABLE
00461 E248 BD E05E            JSR      ADD3X     GET NEXT TAB LOC
00462 E24B 26 E9              BNE      TGB       MORE TO DO?
00463                    ◆ PREPARE TO RETURN TO USER
00464 E24D 86 20    TGC       LDA A    #$20
00465 E24F B7 8022            STA A    SCNREG    SETUP FOR KB INTR
00466 E252 F6 8022            LDA B    SCNREG    DUMMY READ TO CLEAR INTR
00467 E255 86 3D              LDA A    #$3D
00468 E257 B7 8023            STA A    SCNCTR    ENABLE KB INTR
00469 E25A 3B                 RTI                BACK TO USER
00470                    ◆ HERE TO DISPLAY NEXT MEM LOC
00471 E25B 8D 47    KEYD1F    BSR      MINC      MEMORY INCREMENT
00472 E25D 8D 12              BSR      MDIS0     MEMORY DISPLAY
00473 E25F 20 AB              BRA      KEYDCG
00474                    ◆ HERE ON DISPLAY NEXT REGISTER
00475 E261 BD E2D7  KEYD2F    JSR      REGST1    REGISTER DISPLAY
00476 E264 20 A6              BRA      KEYDCG
00477 E266 7E E0E4  KEYD3F    JMP      BLDX
00478                    ◆◆
00479                    ◆
00480                    ◆◆SUBROUTINE TO DISPLAY MEMORY AND CHANGE IT◆◆
00481                    ◆
00482                    ◆
00483 E269 FE A01A  MDIS      LDX      XKEYBF
00484 E26C 08                 INX
00485 E26D 08                 INX
```

```
00486 E26E FF A01A          STX     XKEYBF    UPDATE POINTER
00487 E271 8D F3    MDIS0    BSR     KEYD3F    GET ADDR OF MEM LOCATION
00488 E273 A6 00             LDA A   0,X       GET MEMORY DATA
00489 E275 8D 23             BSR     MDIS2     FORMAT DATA
00490 E277 B7 A010           STA A   DISBUF+4  STORE DATA IN DISBUF
00491 E27A F7 A011           STA B   DISBUF+5
00492 E27D 39               RTS
00493                     ◆
00494                     ◆ SUB TO PUT NEW DATA IN MEMORY AND DISPLAY IT
00495                     ◆
00496 E27E F6 A012 MDIS1    LDA B   DISBUF+6 GET NEW DATA
00497 E281 58               ASL B
00498 E282 58               ASL B
00499 E283 58               ASL B
00500 E284 58               ASL B              DATA TO HIGH NIBBLE
00501 E285 FA A013           ORA B   DISBUF+7 OR WITH LOW NIBBLE
00502 E288 8D DC             BSR     KEYD3F    GET MEMORY ADDR AGAIN
00503 E28A E7 00             STA B   0,X       STORE NEW DATA
00504 E28C A6 00             LDA A   0,X       ACTUAL DATA IN MEMORY
00505 E28E 8D 0A             BSR     MDIS2     FORMAT
00506 E290 B7 A010           STA A   DISBUF+4  ACTUAL DATA TO DISPLAY
00507 E293 F7 A011           STA B   DISBUF+5
00508 E296 7F A015           CLR     DIGIN8    SETUP FOR NEW DATA ENTRY
00509 E299 39               RTS
00510                     ◆
00511                     ◆◆SUBROUTINE TO MOVE LOW NIBBLE OF A TO B AND TO
00512                     ◆◆◆◆MOVE HIGH NIBBLE OF A TO LOW NIBBLE OF A
00513                     ◆
00514 E29A 16     MDIS2    TAB
00515 E29B C4 0F             AND B   #$0F      MASK LOW NIBBLE
00516 E29D 84 F0             AND A   #$F0      MASK HIGH NIBBLE
00517 E29F 44               LSR A
00518 E2A0 44               LSR A
00519 E2A1 44               LSR A
00520 E2A2 44               LSR A              HIGH NIBBLE TO LOW NIBBLE
00521 E2A3 39               RTS
00522                     ◆
00523                     ◆ SUBROUTINE TO INC MEMORY DISPLAY AND CHG?
00524                     ◆
00525 E2A4 8D C0   MINC     BSR     KEYD3F    GET MEMORY ADDRESS
00526 E2A6 08               INX               SETUP FOR NEXT MEMORY LOC
00527 E2A7 FF A00A           STX     TEMP1     SAVE
00528 E2AA B6 A00A           LDA A   TEMP1     GET HIGH BYTE
00529 E2AD 8D EB             BSR     MDIS2     FORMAT FOR DISBUF
00530 E2AF CE A00C           LDX     #DISBUF
00531 E2B2 A7 00             STA A   0,X
00532 E2B4 E7 01             STA B   1,X       PUT IN DISPLAY BUFFER
00533 E2B6 B6 A00B           LDA A   TEMP1+1   GET LOW BYTE
00534 E2B9 8D DF             BSR     MDIS2     FORMAT
00535 E2BB A7 02             STA A   2,X
00536 E2BD E7 03             STA B   3,X
00537 E2BF 7C A014           INC     DIGIN4    FOUR DIGITS ENTERED
00538 E2C2 7C A016           INC     MFLAG     SETUP FOR MEMORY EXAMINE
00539 E2C5 39               RTS
```

```
00540                      ◆
00541                      ◆
00542                      ◆◆SUBROUTINE TO DISPLAY REGISTERS ON USERS STACK
00543                      ◆
00544                      ◆ ORDER OF DISPLAY IS: PC,X,A,B,CC,SP
00545                      ◆   TEMP2 STARTS AT -2 AND ADVANCES TO +3 AND
00546                      ◆   CORRESPONDS TO THE ORDER OF DISPLAY
00547                      ◆
00548 E2C6 86 FE   REGST  LDA A   ::$FE        INITALIZE COUNTER
00549 E2C8 B7 A019        STA A   TEMP2
00550 E2CB FE A008        LDX     SP           GET USER'S SP
00551 E2CE 86 06          LDA A   ::$6
00552 E2D0 08      REGST0 INX                  POINT TO TOP OF STACK
00553 E2D1 4A             DEC A
00554 E2D2 26 FC          BNE     REGST0
00555 E2D4 FF A00A        STX     TEMP1        TEMP X LOCATION
00556 E2D7 BD E0C4 REGST1 JSR     CLRDS        CLEAR DISPLAY
00557 E2DA FE A00A        LDX     TEMP1        RESTORE X
00558 E2DD B6 A019        LDA A   TEMP2
00559 E2E0 2B 0E          BMI     REGST2       PC AND X REGS
00560 E2E2 81 03          CMP A   ::$3         IS IT SP?
00561 E2E4 27 21          BEQ     REGST3       YES
00562 E2E6 81 04          CMP A   ::$4         ALL REGS OUT START OVER
00563 E2E8 27 DC          BEQ     REGST
00564 E2EA A6 00          LDA A   0,X          OUTPUT A,B,CC
00565 E2EC 8D 2E          BSR     REGST5       DISPLAY ONE BYTE
00566 E2EE 20 21          BRA     REGST4       UPDATE COUNTER
00567 E2F0 36      REGST2 PSH A                SAVE A
00568 E2F1 A6 00          LDA A   0,X          GET HIGH BYTE
00569 E2F3 8D 27          BSR     REGST5       DISPLAY
00570 E2F5 FE A00A        LDX     TEMP1
00571 E2F8 A6 01          LDA A   1,X          GET LOW BYTE
00572 E2FA 8D 2B          BSR     REGST6       DISPLAY
00573 E2FC 32             PUL A                RESTORE A
00574 E2FD 4C             INC A                X REG? (A=0)
00575 E2FE 27 11          BEQ     REGST4       YES
00576 E300 8D 12          BSR     REGST8       DEC POINTER
00577 E302 BD E271        JSR     MDIS0
00578 E305 20 0A          BRA     REGST4       UPDATE COUNTER
00579 E307 B6 A008 REGST3 LDA A   SP           SP TO DISPLAY
00580 E30A 8D 10          BSR     REGST5       DISPLAY
00581 E30C B6 A009        LDA A   SP+1
00582 E30F 8D 16          BSR     REGST6
00583 E311 7C A019 REGST4 INC     TEMP2        UPDATE COUNTER
00584 E314 FE A00A REGST8 LDX     TEMP1        INCREMENT X
00585 E317 09             DEX
00586 E318 FF A00A        STX     TEMP1        SAVE X
00587 E31B 39             RTS
00588                      ◆
00589                      ◆◆SUBROUTINE TO MOVE TWO DIGITS IN A TO FIRST TWO
00590                      ◆◆◆◆LOCATIONS IN THE DISPLAY BUFFER (DISBUF)
00591                      ◆
00592 E31C BD E29A REGST5 JSR     MDIS2        FORMAT
00593 E31F CE A00C        LDX     ::DISBUF
```

```
00594 E322 A7 00     REGST7 STA A   0,X        FIRST DIGIT(OR THIRD)
00595 E324 E7 01            STA B   1,X        SECOND DIGIT
00596 E326 39               RTS
00597                    *
00598                    **SUBROUTINE TO MOVE TWO DIGITS IN A TO SECOND TWO L
00599                    ****LOCATIONS IN THE DISPLAY BUFFER (DISBUF)
00600                    *
00601 E327 BD E29A     REGST6 JSR     MDIS2      FORMAT
00602 E32A CE A00E            LDX     #DISBUF+2  THIRD & FOURTH DIGITS
00603 E32D 20 F3              BRA     REGST7
00604                    *
00605                    *
00606                    ****SUBROUTINE TO PUNCH DATA TO CASSETTE TAPE****
00607                    * AUDIO CASSETTE WITH KC STANDARD
00608                    *
00609 E32F 86 51       PNCH   LDA A   #%01010001  8 BIT CHR PAR 2 STOP
00610 E331 B7 8008            STA A   ACIAS       DIVIDE BY 16 WITH RTS NOT HIG
00611 E334 CE 03FF            LDX     #$03FF
00612 E337 8D 54              BSR     PNLDR       PUNCH LEADER
00613 E339 F6 A005     PUND10 LDA B   ENDA+1      FORM END TEMP REG
00614 E33C F0 A003            SUB B   BEGA+1
00615 E33F B6 A004            LDA A   ENDA
00616 E342 B2 A002            SBC A   BEGA
00617 E345 27 02              BEQ     PUND25      DIFF LESS THAN 255
00618 E347 C6 FF              LDA B   #$FF        YES, SET BLOCK=256
00619 E349 86 42       PUND25 LDA A   #'B         PUNCH B
00620 E34B 8D 2D              BSR     OUTCH
00621 E34D 37                 PSH B
00622 E34E 30                 TSX
00623 E34F 8D 36              BSR     PUN
00624 E351 32                 PUL A               GET BYTE COUNT
00625 E352 4C                 INC A               ADJUST IT
00626 E353 B7 A019            STA A   TEMP2
00627 E356 CE A002            LDX     #BEGA       PUNCH ADDR
00628 E359 8D 2C              BSR     PUN
00629 E35B 8D 2A              BSR     PUN
00630 E35D FE A002            LDX     BEGA        PUNCH DATA
00631 E360 8D 25       PUND30 BSR     PUN
00632 E362 7A A019            DEC     TEMP2       DONE YET?
00633 E365 26 F9              BNE     PUND30      NO
00634 E367 FF A002            STX     BEGA        SAVE XR VALUE
00635 E36A CE 0019            LDX     #$0019
00636 E36D 8D 1E              BSR     PNLDR       PUNCH 25 ONES
00637 E36F FE A002            LDX     BEGA        RESTORE XR
00638 E372 09                 DEX
00639 E373 BC A004            CPX     ENDA
00640 E376 26 C1              BNE     PUND10      NO
00641 E378 86 47              LDA A   #'G         PUNCH G
00642                    *
00643                    ***SUBROUTINE TO PUNCH DATA BYTE****
00644                    *
00645 E37A 37          OUTCH  PSH B               SAVE B
00646 E37B F6 8008     OUTC1  LDA B   ACIAS       IS DATA READY YET?
00647 E37E 57                 ASR B
```

```
00648 E37F 57           ASR B
00649 E380 24 F9         BCC     OUTC1    XMIT NOT READY YET
00650 E382 B7 8009       STA A   ACIAD    OUTPUT ONE CHAR
00651 E385 33            PUL B            RESTORE B
00652 E386 39            RTS
00653              ◆
00654              ◆ SUB TO PUNCH ONE BYTE PTED TO BY XREG.
00655              ◆ ALSO INCREMENTS XREG BEFORE RETURN
00656              ◆
00657 E387 A6 00   PUN   LDA A   X        GET DATA
00658 E389 8D EF         BSR     OUTCH    PUNCH IT
00659 E38B 08            INX              UPDATE ADDR
00660 E38C 39            RTS
00661              ◆
00662              ◆◆◆PUNCH LEADER◆◆◆
00663              ◆
00664 E38D 86 FF   PNLDR LDA A   #$FF     OUTPUT ALL ONES
00665 E38F 8D E9         BSR     OUTCH    OUTPUT
00666 E391 09            DEX              DECREMENT COUNTER
00667 E392 26 F9         BNE     PNLDR    IF NOT DONE THEN LOOP
00668 E394 39            RTS
00669              ◆
00670              ◆
00671              ◆◆◆◆◆◆SUBROUTINE TO LOAD DATA FROM CASSETTE TAPE◆◆◆◆
00672              ◆
00673              ◆
00674 E395 86 10   LOAD  LDA A   #%00010000  DIVIDE BY ONE
00675 E397 B7 8008       STA A   ACIAS
00676 E39A 8D 24   BILD  BSR     INCHR
00677 E39C 81 42         CMP A   #'B      START OF BINARY?
00678 E39E 27 05         BEQ     RDBLCK   YES
00679 E3A0 81 47         CMP A   #'G      END OF FILE?
00680 E3A2 26 F6         BNE     BILD
00681 E3A4 39            RTS              YES
00682 E3A5 8D 19   RDBLCK BSR    INCHR    GET BYTE COUNT
00683 E3A7 16            TAB              PUT IN B
00684 E3A8 5C            INC B            ADJUST IT
00685 E3A9 8D 15         BSR     INCHR    GET START ADDR HI
00686 E3AB B7 A002       STA A   BEGA
00687 E3AE 8D 10         BSR     INCHR    GET START ADDR LO
00688 E3B0 B7 A003       STA A   BEGA+1
00689 E3B3 FE A002       LDX     BEGA     ADDR TO X REG
00690 E3B6 8D 08   STBLCK BSR    INCHR    NOT DONE
00691 E3B8 A7 00         STA A   X        STRE IT
00692 E3BA 08            INX              INC ADDR
00693 E3BB 5A            DEC B            DEC BYTE COUNT
00694 E3BC 26 F8         BNE     STBLCK   NOT DONE
00695 E3BE 20 DA         BRA     BILD
00696              ◆
00697              ◆◆◆◆◆INPUT ONE CHR TO A REG◆◆◆◆◆◆
00698              ◆
00699 E3C0 B6 8008 INCHR LDA A   ACIAS
00700 E3C3 47            ASR A
00701 E3C4 24 FA         BCC     INCHR    DATA READY?
```

```
00702 E3C6 B6 8009              LDA A   ACIAD      INPUT CHAR
00703 E3C9 39                   RTS
00704                     ◆
00705                     ◆◆◆◆◆SEVEN SEGMENT PATTERNS - USED BY OUTDS◆◆◆◆
00706                     ◆               0    1    2    3    4    5    6    7
00707 E3CA 40             DIGTBL FCB    $40,$79,$24,$30,$19,$12,$02,$78
      E3CB 79
      E3CC 24
      E3CD 30
      E3CE 19
      E3CF 12
      E3D0 02
      E3D1 78
00708                     ◆               8    9    A    B    C    D    E    F
00709 E3D2 00                    FCB    $00,$18,$08,$03,$46,$21,$06,$0E
      E3D3 18
      E3D4 08
      E3D5 03
      E3D6 46
      E3D7 21
      E3D8 06
      E3D9 0E
00710                     ◆               -    BLANK
00711 E3DA BF                    FCB    $BF,$7F
      E3DB 7F
00712                     ◆◆◆◆KEY VALUE LOOKUP TABLE - USED BY KEYDC
00713                     ◆               0    1    2    3    4    5    6    7
00714 E3DC 01             KEYTBL FCB    $01,$02,$42,$82,$04,$44,$84,$08
      E3DD 02
      E3DE 42
      E3DF 82
      E3E0 04
      E3E1 44
      E3E2 84
      E3E3 08
00715                     ◆               8    9    A    B    C    D    E    F
00716 E3E4 48                    FCB    $48,$88,$C8,$C4,$C2,$C1,$81,$41
      E3E5 88
      E3E6 C8
      E3E7 C4
      E3E8 C2
      E3E9 C1
      E3EA 81
      E3EB 41
00717                     ◆               P    L    N    V    M    E    R    G
00718 E3EC 10                    FCB    $10,$50,$90,$D0,$20,$60,$A0,$E0
      E3ED 50
      E3EE 90
      E3EF D0
      E3F0 20
      E3F1 60
      E3F2 A0
      E3F3 E0
00719                     ◆
```

```
00720                        ******KEYBOARD/DISPLAY REGISTER ASSIGNMENT
00721                        *
00722        8020     DISREG EQU     $8020    DISPLAY SEGMENTS REGISTER
00723        8021     DISCTR EQU     $8021    DISPLAY SEGMENTS CONTROL
00724        8022     SCNREG EQU     $8022    KEYBOARD/DISPLAY SCAN REG
00725        8023     SCNCTR EQU     $8023    KEYBOARD/DISPLAY SCAN CTR
00726        8008     ACIAS  EQU     $8008    ACIA CTRL OR STATUS REG
00727        8009     ACIAD  EQU     $8009    ACIA XMIT OR RCV REGS
00728                        *
00729                        ****INTERRUPT VECTORS****
00730                        *
00731 E3F8                   ORG     $E3F8
00732 E3F8 E014              FDB     IO       IRQ INTERRUPT VECTOR
00733 E3FA E032              FDB     SWIR     SOFTWARE INTERRUPT VECTOR
00734 E3FC E019              FDB     NONMSK   NMI INTERRUPT VECTOR
00735 E3FE E08D              FDB     RESTAR   RESTART INTERRUPT VECTOR
```

```
00737                         ♦
00738                         ♦♦♦♦♦♦VARIABLE PARAMETERS♦♦♦♦♦♦
00739                         ♦    SYSTEM RAM
00740                         ♦
00741                         ♦
00742                         ♦ CAUTION: IF THE USER MODIFY'S THIS PROGRAM
00743                         ♦ (GENERATES HIS OWN PROM) THE ORDER OF SOME
00744                         ♦ OF THE FOLLOWING VARIABLES IS CRITICAL FOR
00745                         ♦ CORRECT OPERATION
00746                         ♦
00747 A000                         ORG     $A000
00748                         ♦ THE USER CAN STORE THE ADDRES OF HIS IRQ
00749                         ♦ ROUTINE HERE.
00750 A000 0002          IOV     RMB     2        IRQ INTERRUPT POINTER
00751 A002 0002          BEGA    RMB     2        PUNCH BEGINNING ADDRESS
00752 A004 0002          ENDA    RMB     2        PUNCH ENDING ADDRESS
00753 A006 0002          NIO     RMB     2        NMI INTERRUPT POINTER
00754 A008 0002          SP      RMB     2        TEMP STACK BUFFER
00755 A00A 0002          TEMP1   RMB     2        SCRATCH
00756 A00C 0008          DISBUF  RMB     8        DISPLAY BUFFER
00757 A014 0001          DIGIN4  RMB     1        4 DIGITS ENTERED FLAG
00758 A015 0001          DIGIN8  RMB     1        8 DIGITS ENTERED FLAG
00759 A016 0001          MFLAG   RMB     1        MEMORY CHANGE MODE FLAG
00760 A017 0001          RFLAG   RMB     1        REGISTER DISPLAY MODE FLAG
00761 A018 0001          NFLAG   RMB     1        TRACE MODE FLAG
00762 A019 0001          TEMP2   RMB     1        COUNTER IN REG DISPLAY, AUDIO
00763 A01A 0002          XKEYBF  RMB     2        NEXT LOC IN DISPLAY BUFFER
00764 A01C 0001          SCNCNT  RMB     1        KEYBOARD /DISPLAY SCAN COUNTE
00765 A01D 0001          VFLAG   RMB     1        CONTAINS THE NBR OF ACTIVE BR
00766 A01E 0002          BPADR   RMB     2        TEMP ADDR OF BP&XREG TEMP
00767 A020 0002          XDSBUF  RMB     2        XREG TEMP LOCATION
00768                         ♦
00769                         ♦ BREAKPOINT AND OPCODE TABLE
00770                         ♦    EACH BRKPT REQUIRES 3 BYTES,
00771                         ♦    BYTES 1,2 ARE THE ADDRESS OF THE BRKPT
00772                         ♦    BYTE 3 IS THE REPLACED OP CODE
00773                         ♦    CHECK VFLAG TO SEE HOW MANY OF THE BRKPTS
00774                         ♦    ARE VALID
00775                         ♦
00776 A022 000F          BPTAB   RMB     15       BREAKPOINT & OP CODE TABLE
00777                         END
```

IO	E014	KEYCL2	E148	KEYD3F	E266	DIGTBL E3CA
NONMSK	E019	OUTDS3	E149	MDIS	E269	KEYTBL E3DC
TNMI	E023	KEYDC	E14E	MDIS0	E271	DISREG 8020
NONMK1	E02D	KEYDC1	E15B	MDIS1	E27E	DISCTR 8021
SWIR	E032	KEYDC2	E169	MDIS2	E29A	SCNREG 8022
TZONK	E044	KEYDC3	E16D	MINC	E2A4	SCNCTR 8023
GENA	E054	KEYDC4	E17A	REGST	E2C6	ACIAS 8008
TDISP	E058	KEYDC6	E192	REGST0	E2D0	ACIAD 8009
ADD3X	E05E	KEYDC7	E198	REGST1	E2D7	IOV A000
GETXB	E063	KEYDC5	E1AC	REGST2	E2F0	BEGA A002
SETBR	E06A	KYDC5	E1AF	REGST3	E307	ENDA A004
TPIG	E072	JMPTAB	E1B6	REGST4	E311	NIO A006
TZOT	E076	KEYDC8	E1C6	REGST8	E314	SP A008
DISNMI	E084	KEYDC9	E1CE	REGST5	E31C	TEMP1 A00A
RESTAR	E08D	KEYDCH	E1D4	REGST7	E322	DISBUF A00C
INIT	E0AC	KEYD0F	E1D7	REGST6	E327	DIGIN4 A014
CLFLG	E0B2	KEYDCA	E1DA	PNCH	E32F	DIGIN8 A015
CLFLG1	E0B6	TRACE	E1DD	PUND10	E339	MFLAG A016
CLRDS	E0C4	KEYDCB	E1E6	PUND25	E349	RFLAG A017
CLRDS1	E0CE	KEYDCC	E1F7	PUND30	E360	NFLAG A018
HDR	E0D7	KEYDCD	E203	OUTCH	E37A	TEMP2 A019
DLY20	E0DD	KEYDCE	E206	OUTC1	E37B	XKEYBF A01A
DLY1	E0E0	KEYDCG	E20C	PUN	E387	SCNCNT A01C
BLDX	E0E4	KEYDCF	E20E	PNLDR	E38D	VFLAG A01D
OUTDS	E0FE	KEYDCJ	E224	LOAD	E395	BPADR A01E
OUTDS1	E101	TGB	E236	BILD	E39A	XDSBUF A020
OUTDS2	E10B	TGC	E24D	RDBLCK	E3A5	BPTAB A022
KEYCL	E12F	KEYD1F	E25B	STBLCK	E3B6	
KEYCL1	E13A	KEYD2F	E261	INCHR	E3C0	

MEK6800D2 Keyboard/Display Module Parts List

| ITEM	NUMBER REQUIRED	DESCRIPTION	CATALOG NUMBER	DESIGNATION
1	3	Integrated Circuit: Peripheral Driver	MC75452P	U7, U8, U9
2	6	Integrated Circuit: 7Segment LED Display (Litronix or Monsanto)	Litronix DL704 Monsanto MAN72 or 74	U1 — U6
3	1	Integrated Circuit: Dual 4-Channel Data Selector	MC14539BCP	U10
4	1	Integrated Circuit: Dual Monostable Multivibrator	MC14538BCP	U11
5	2	Integrated Circuit: Dual D Flip-Flop	MC14013BCP	U12, U18
6	1	Integrated Circuit: Quad 2-Input AND Gate	MC14081BCP	U13
7	1	Integrated Circuit: Quad Analog Switch	MC14016BCP	U14
8	1	Integrated Circuit: Quad Op-Amp	MC3301P	U16
9	1	Integrated Circuit: Dual Line Receiver	MC75140P1	U17
10	1	Integrated Circuit: Seven Stage Ripple Counter	MC14024BCP	U19
11	1	Integrated Circuit: Analog Multiplexer/Demultiplexer	MC14053BCP	U20
12	7	Transistor, PNP	MPS2907	Q1 — Q7
13	1	Capacitor: 100μF, 16 volts		C1
14	14	Capacitor: 0.1μF		C2, C5, C9, C10, C14, C16-C23, C25
15	2	Capacitor: 0.05μF		C6, C13
16	3	Capacitor: 0.001μF		C3, C4, C24
17	3	Capacitor: 0.002μF		C7, C8, C15
18	1	Capacitor: 2400 pF Dipped Duramica		C11
19	7	Resistor: 4700 Ω, 1/4 W, 5%		R1, R4, R7, R10 R13, R16, R19
20	29	Resistor: 10 kΩ, 1/4 W, 5%		R2, R5, R8, R11, R14, R17, R20, R22-34, R46, R49, R53, R55, R56, R59, R60, R61, R57
21	7	Resistor: 68 Ω, 1/4 W, 5%		R3, R6, R9, R12, R15, R18, R21
22	2	Resistor: 27 kΩ, 1/4 W, 5%		R35, R40
23	8	Resistor: 100 kΩ, 1/4 W, 5%		R37, R38, R39, R41, R43, R47, R54, R58
24	2	Resistor: 100 Ω, 1/4 W, 5%		R48, R51
25	2	Resistor: 1000 Ω, 1/4 W, 5%		R52, R62
26	2	Resistor: 180 kΩ, 1/4 W, 5%		R36, R42
27	3	Resistor: 22 kΩ, 1/4 W, 5%		R44, R45, R50
28	24	Switch (Stackpole)	LO — PR05	S1 — S24
29	16	Keytops, Double-Shot, Molded, White (Stackpole)	Used with S1 — S24, Item 32	0, 1, 2, 3, 4, 5, 6, 7, 8, 9, A, B, C, D, E, F
30	8	Keytops, Double-Shot, Molded, Blue (Stackpole)		E, G, L, M, N, P, R, V
31	1	Connector Cable		
32	1	Printed Wiring Board		
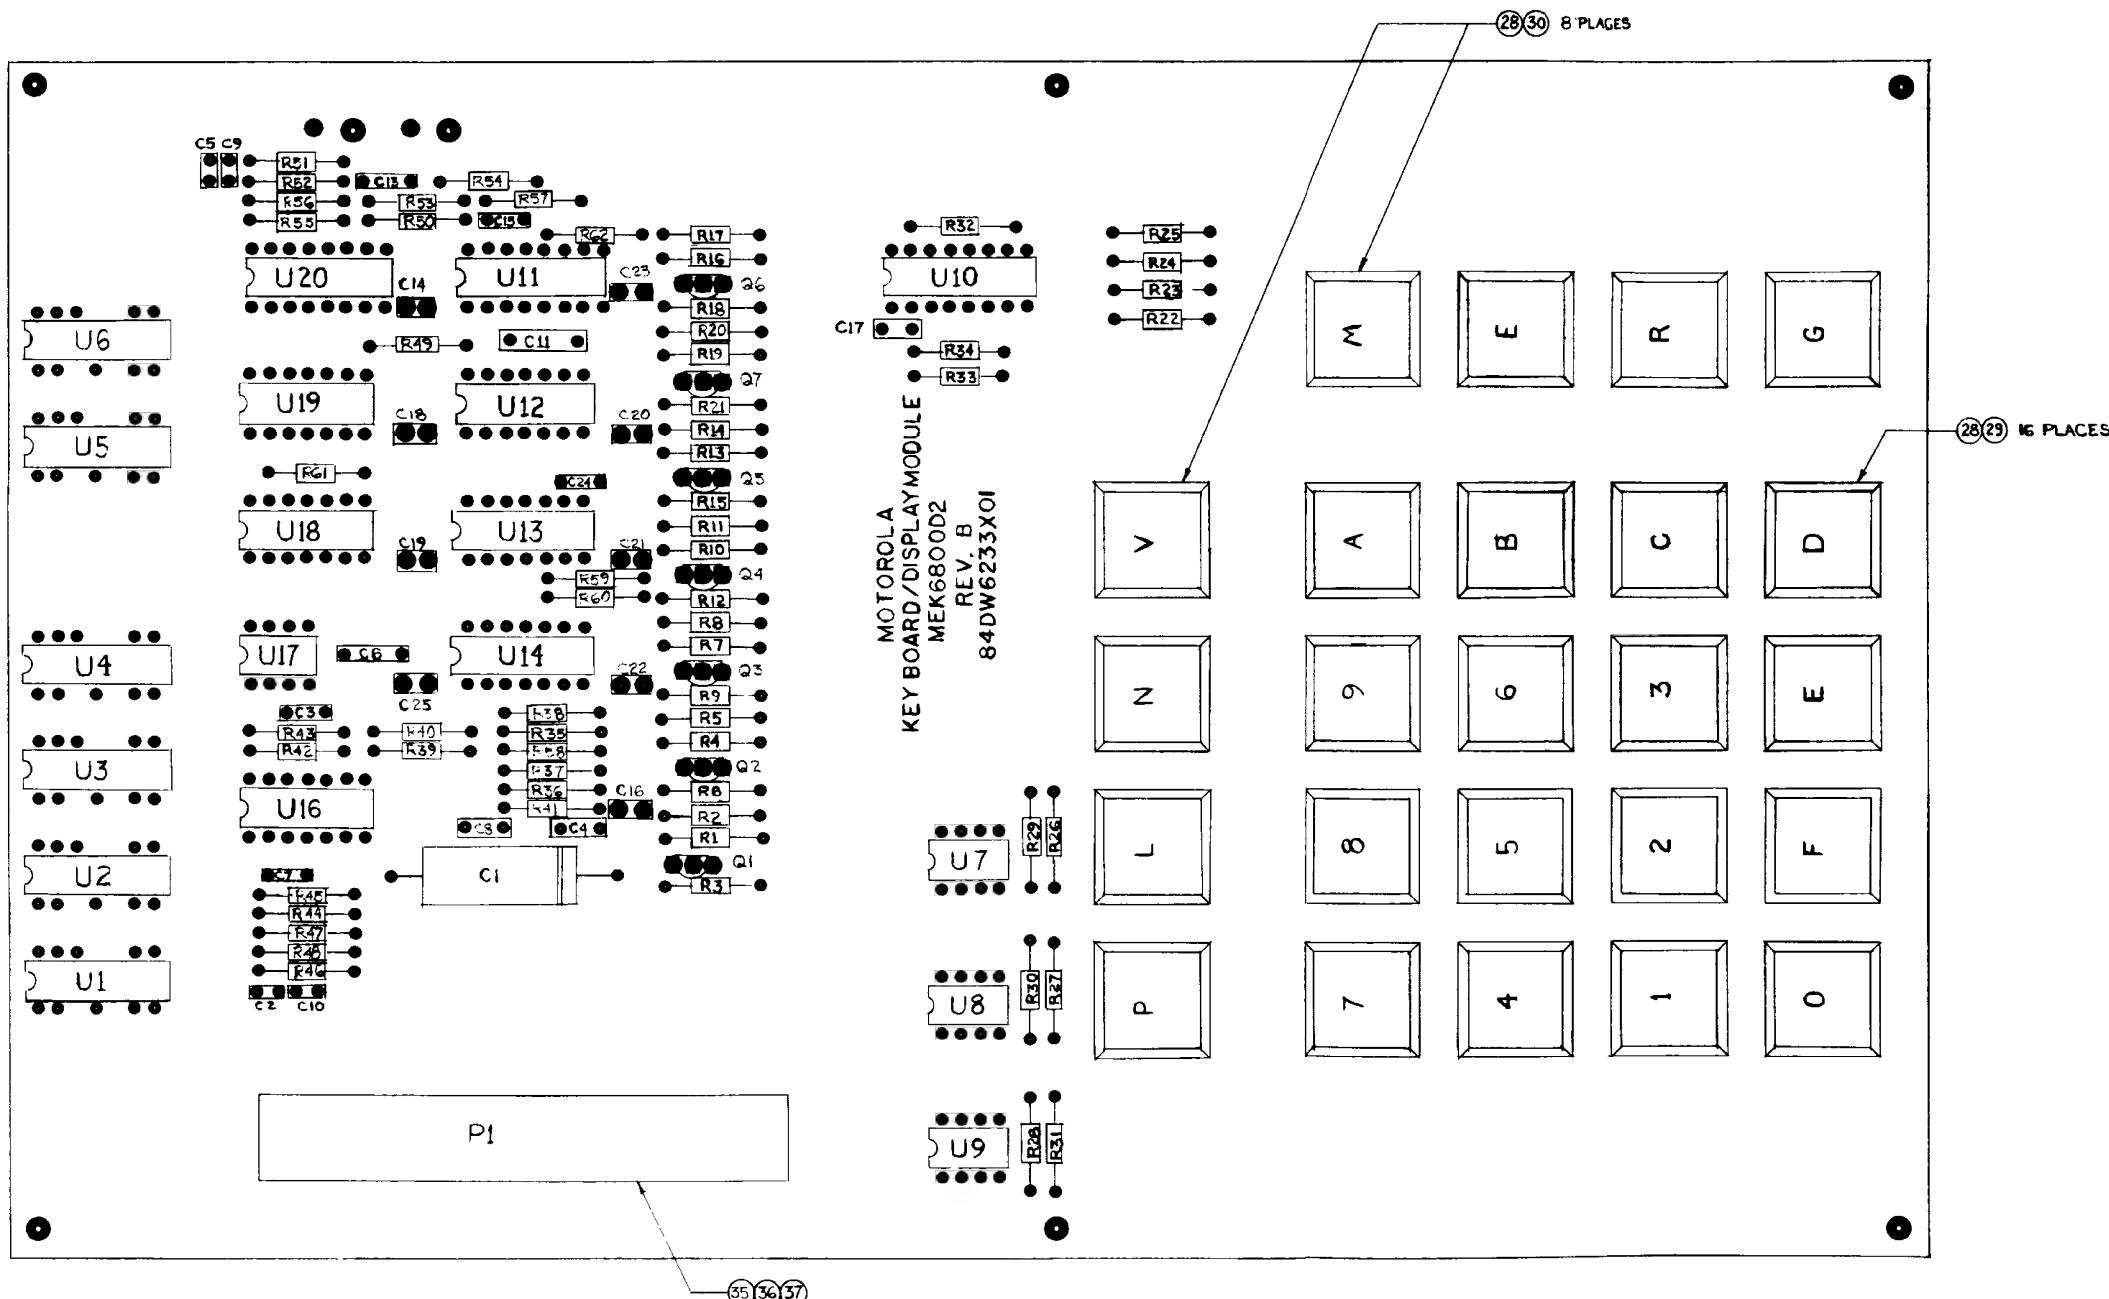
FIGURE A2-a. Keyboard/Display Module Assembly

A2-1

MEK6800D2 Microcomputer Module Parts List

ITEM	NUMBER REQUIRED	DESCRIPTION	CATALOG NUMBER	DESIGNATION
1	1	Printed Wiring Board		
2	None	Integrated Circuit: 3-State Hex Driver (Optional — Reference only)	MC8T97	U1, U2, U3
3	None	Integrated Circuit: 3-State Transmitter/Receiver (Optional — Reference only)	MC8T26	U4, U5
4	None	Integrated Circuit: 8-Input NAND Gate (Optional — Reference only)	MC7430	U7
5	1	Integrated Circuit: Microprocessing Unit (MPU)	MC6800	U6
6	1	Integrated Circuit: MCM6830 ROM (JBUG)	SCM44520P	U8
7	1	Integrated Circuit: 3-State Hex Driver	MC8T96	U9
8	None	Integrated Circuit: Electrically Programmable ROM (Optional — Reference only)	MCM68708	U10, U12 (Alternate)
9	None	Integrated Circuit: Programmable ROM (Optional — Reference only)	MCM7641	U10, U12 (Alternate)
10	None	Integrated Circuit: Mask Programmed ROM (Optional — Reference only)	MCM68316E	U10, U12 (Alternate)
11	1	Integrated Circuit: One-of-Eight Decoder	MC74155P	U11
12	3	Integrated Circuit: Random Access Memory (RAM) (128x8)	MCM6810	U13, U14, U16 (U18, U19 Optional)
13	1	Integrated Circuit: 614.4 kHz Clock	MC6871B	U15
14	1	Integrated Circuit: 12-Bit Binary Counter	MC14040BCP	U17
15	2	Integrated Circuit: Peripheral Interface Adapter (PIA)	MC6820	U20, U21
16	1	Integrated Circuit: Quad 2-Input NAND Gate	MC7400P	U22
17	1	Integrated Circuit: Asynchronous Communications Interface Adapter (ACIA)	MC6850	U23
18	1	Integrated Circuit: Dual D Flip-Flop	MC7479P	U24
19	1	Integrated Circuit: Binary Counter	MC8316P	U25
20	1	Capacitor: 100μF, 16 volt		C1
21	22	Capacitor: 0.1μF (Note: Ref. Designations C20 and C21 are not used)		C2 — C19, C22 — C25
22	None	Diode, Zener, 5-volt (Optional — Reference only)	1N4733	CR1
23	1	Transistor, NPN	MPS2222	Q1
24	18	Resistor: 10 kΩ, 1/4 W, 5%		R1, R6-R22
25	3	Resistor: 3300 Ω, 1/4 W, 5%		R2, R3, R4
26	None	Resistor: 68 Ω, 1.0 W, 5% (Optional — Reference only)		R5
27	None	Capacitor: 160 μF, 16 volt (Optional — Reference only)		C26, C27 R20 — R22
28	10	Socket, 24-Pin (Robinson-Nugent or Equiv)	ICN—246—S4T	
29	3	Socket, 40-Pin (Robinson-Nugent or Equiv)	ICN—406—S4T	
30	1	Switch, Pushbutton (Control)	B8600	Reset
31	1	Cap, Pushbutton Switch (Control)		
32	None	Connector, 86-Pin (SAE) (Optional — Reference only)	SAC 43D/1 — 2	(For P1)
33	None	Connector, Edge, 50-Pin (SAE) (Optional — Reference only)	CPH7000 — 50 ST	(For J1)
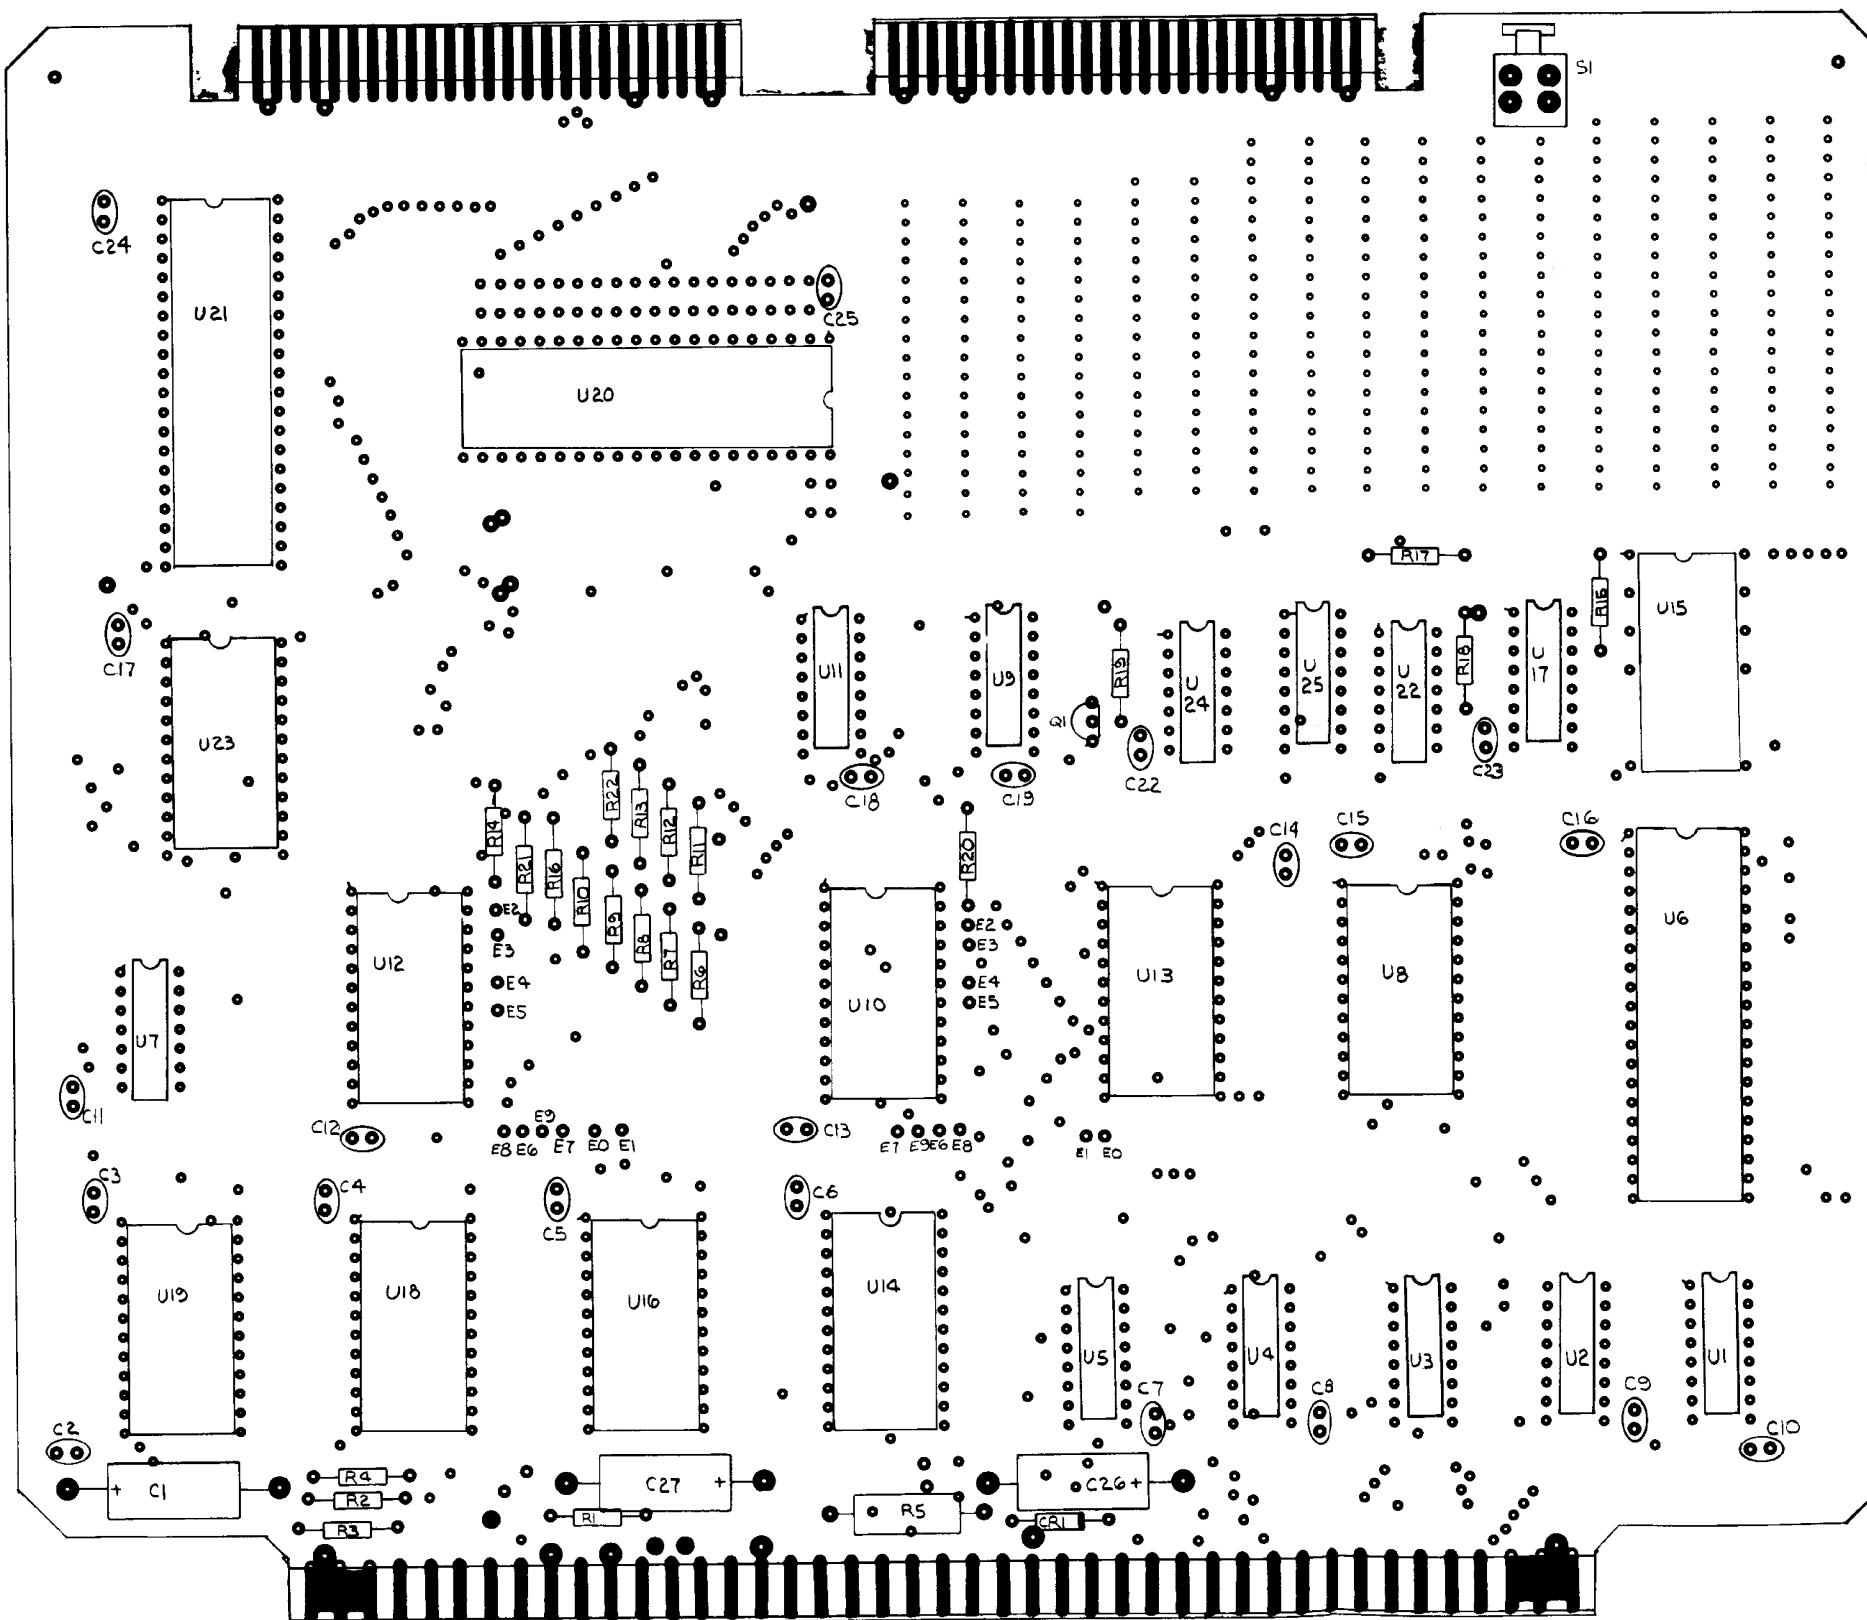
FIGURE A2-b. Microcomputer Module Assembly

10. COMPONENTS WHICH ARE RATED IN WATTS SHALL BE MOUNTED
   1/32 INCH MINIMUM OFF OF BOARD SURFACE AND ELEVATED
   AN ADDITIONAL 1/32 INCH FOR EACH WATT IN EXCESS OF ONE WATT
   UNLESS SUITABLE HEATSINK OR SUPPORT IS SUPPLIED.
9. ALL COMPONENTS SHALL BE MOUNTED 1/32 INCH MINIMUM
   OFF OF PRINTED WIRING BOARD SURFACE.
8. UNINSULATED COMPONENT LEADS WHICH PASS OVER OR ARE
   IN CLOSE PROXIMITY TO EXPOSED CIRCUITRY OR ADJACENT
   COMPONENT LEADS WHERE THERE IS POSSIBILITY OF ELECTRICAL
   SHORTS, SHALL HAVE SLEEVING INSTALLED PRIOR TO
   COMPONENT INSTALLATION.
7. JUMPER WIRE TO BE NO. 24 AWG, TINNED, SOLID, INSULATED
   (COLOR WHITE) ELECTRICAL HOOKUP WIRE.
6. ALL COMPONENTS TO BE SECURED TO CIRCUIT PATTERN
   USING TYPE MS-SN60 RESIN CORE SOLDER.
5. NUMBERS ON CIRCUIT PATTERN ARE POSITION LOCATORS
   ONLY AND DO NOT INDICATE PART IDENTIFICATION NUMBER
   OR REFERENCE DESIGNATION.
4. ⊗ INDICATES DOUBLE TURRET TERMINAL LUG LOCATION.
3. —⊏▮⊐— BAND INDICATES CATHODE END.
2. FLAG ON CIRCUIT PATTERN INDICATES CATHODE END
   LOCATOR FOR AXIAL LEAD SEMICONDUCTOR DEVICES.
1. FLAG ON CIRCUIT PATTERN INDICATES PIN 1 LOCATION ONLY
   AND DOES NOT INDICATE INDEX MARK OR TAB ON DEVICE.

NOTES: UNLESS OTHERWISE NOTED:

A2-3

FIGURE A3-a. Keyboard/Display Module Schematic

A3-1
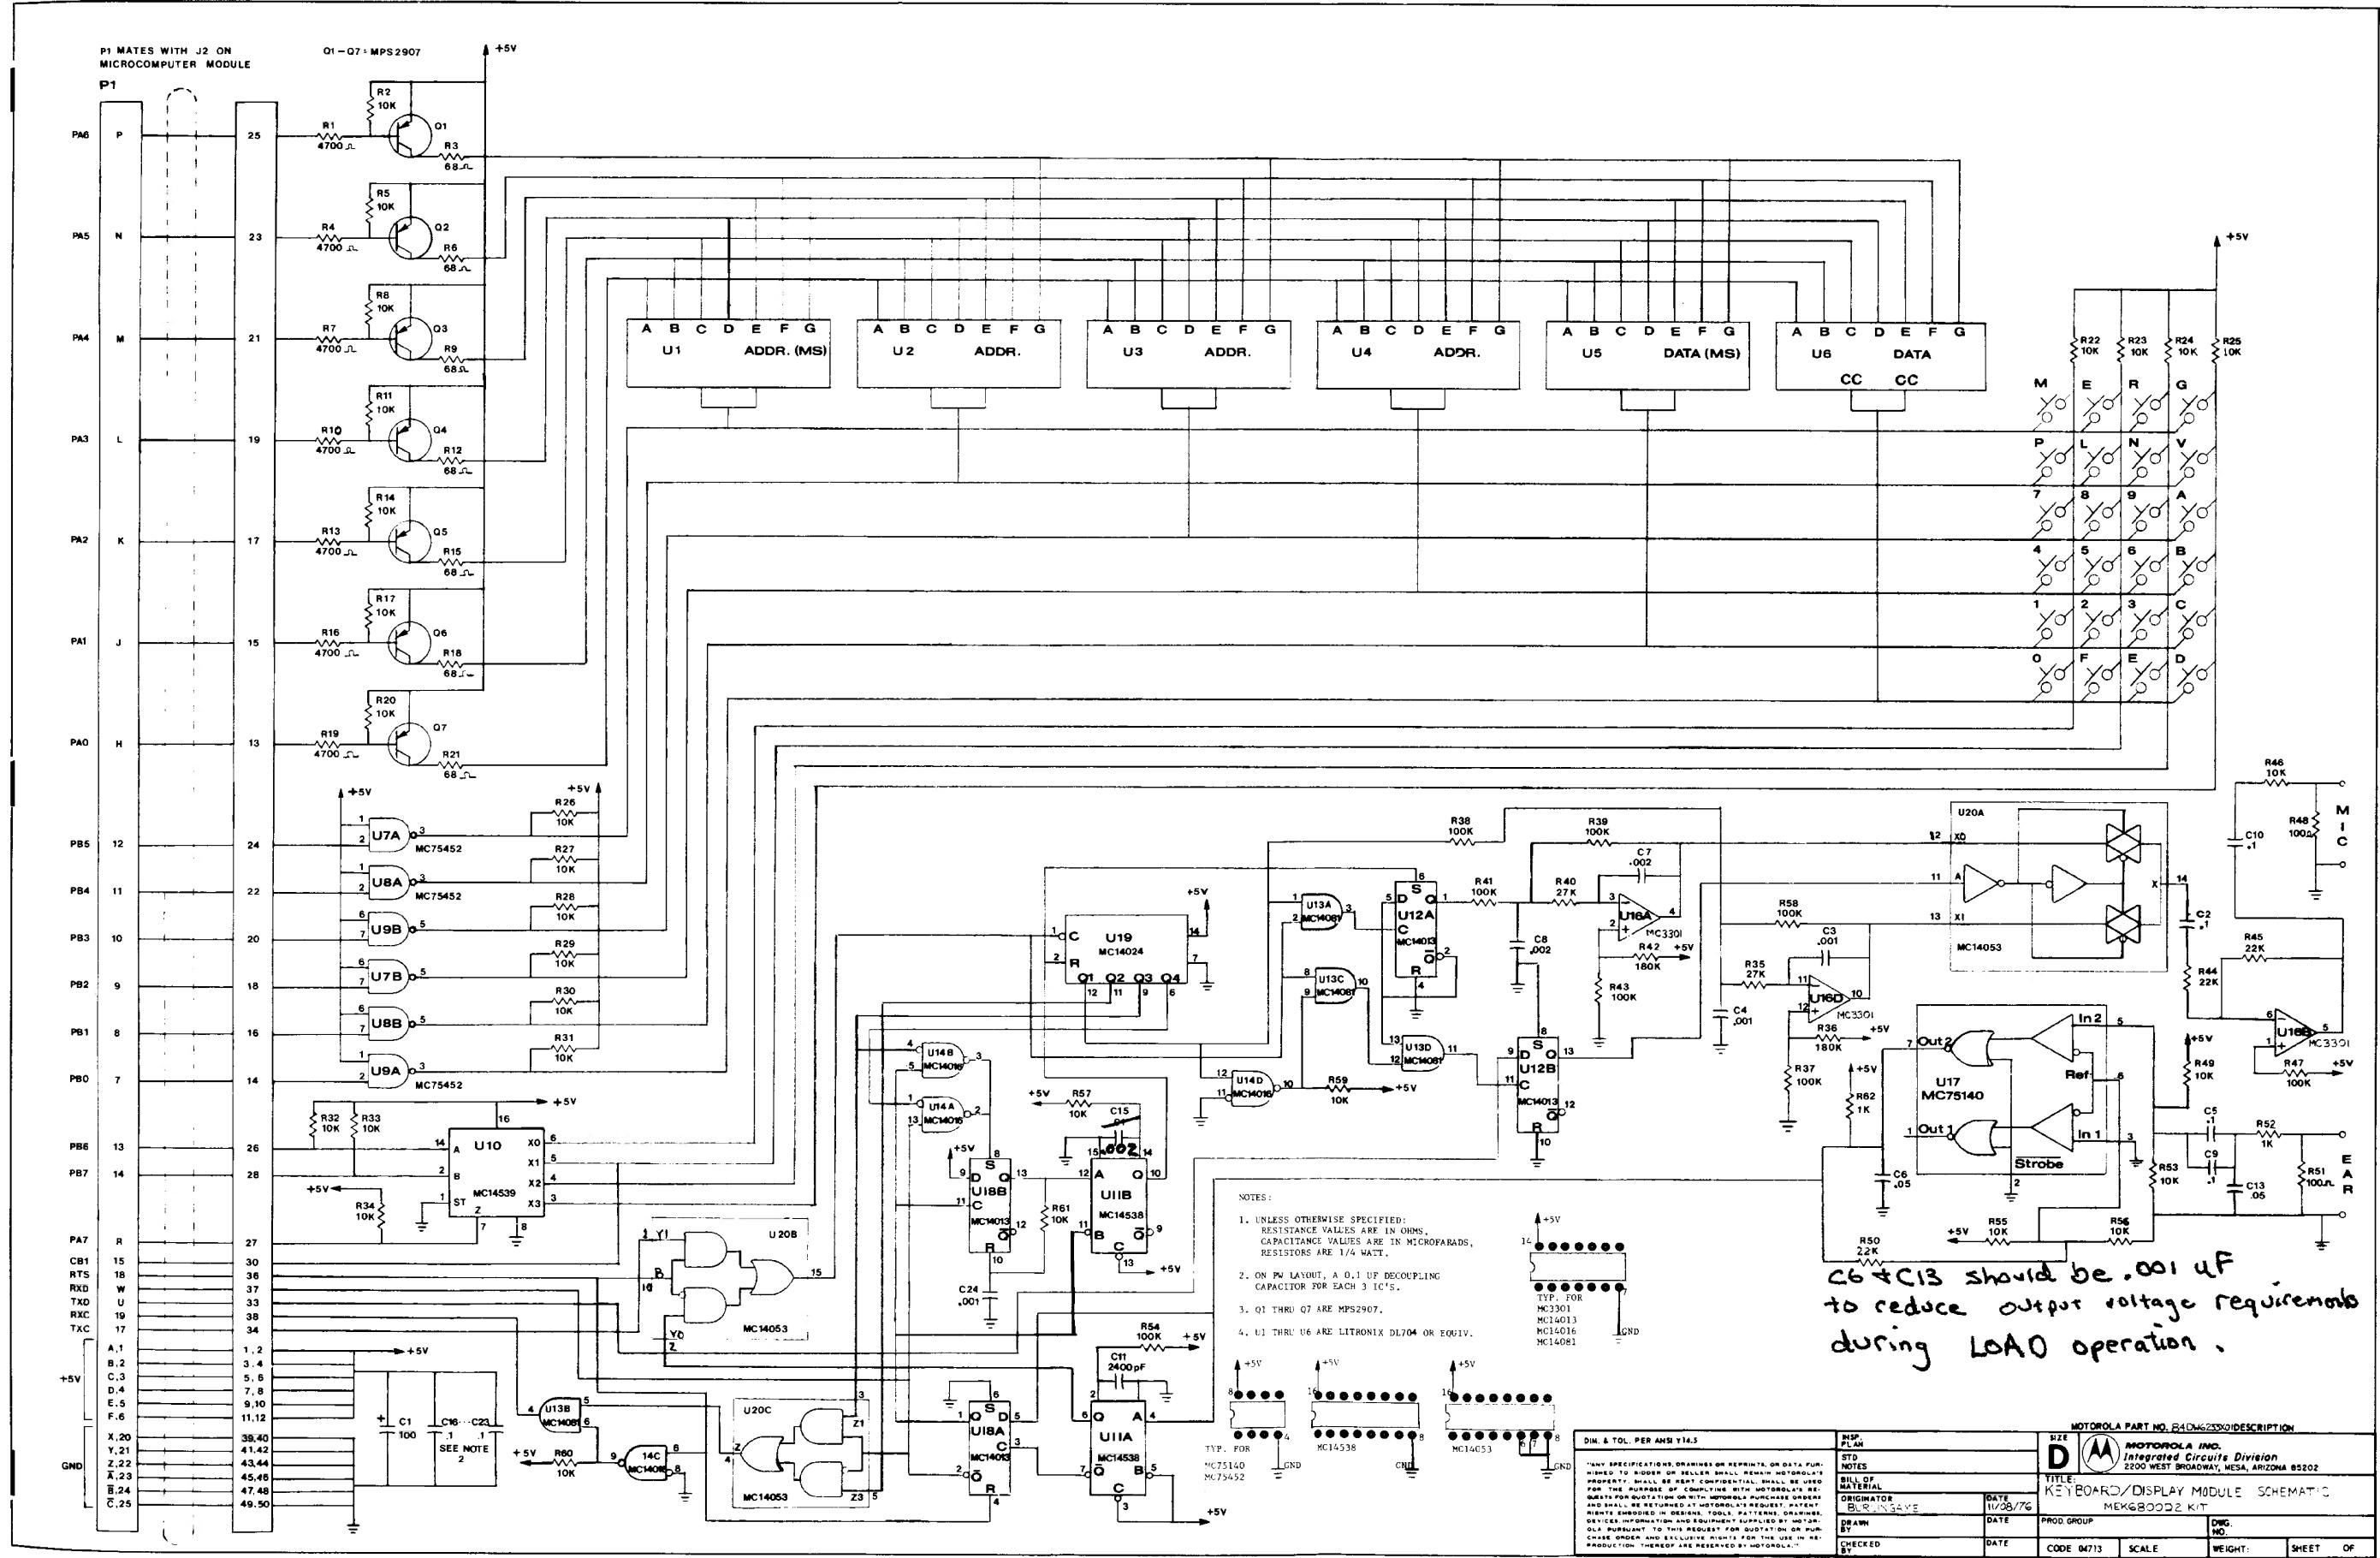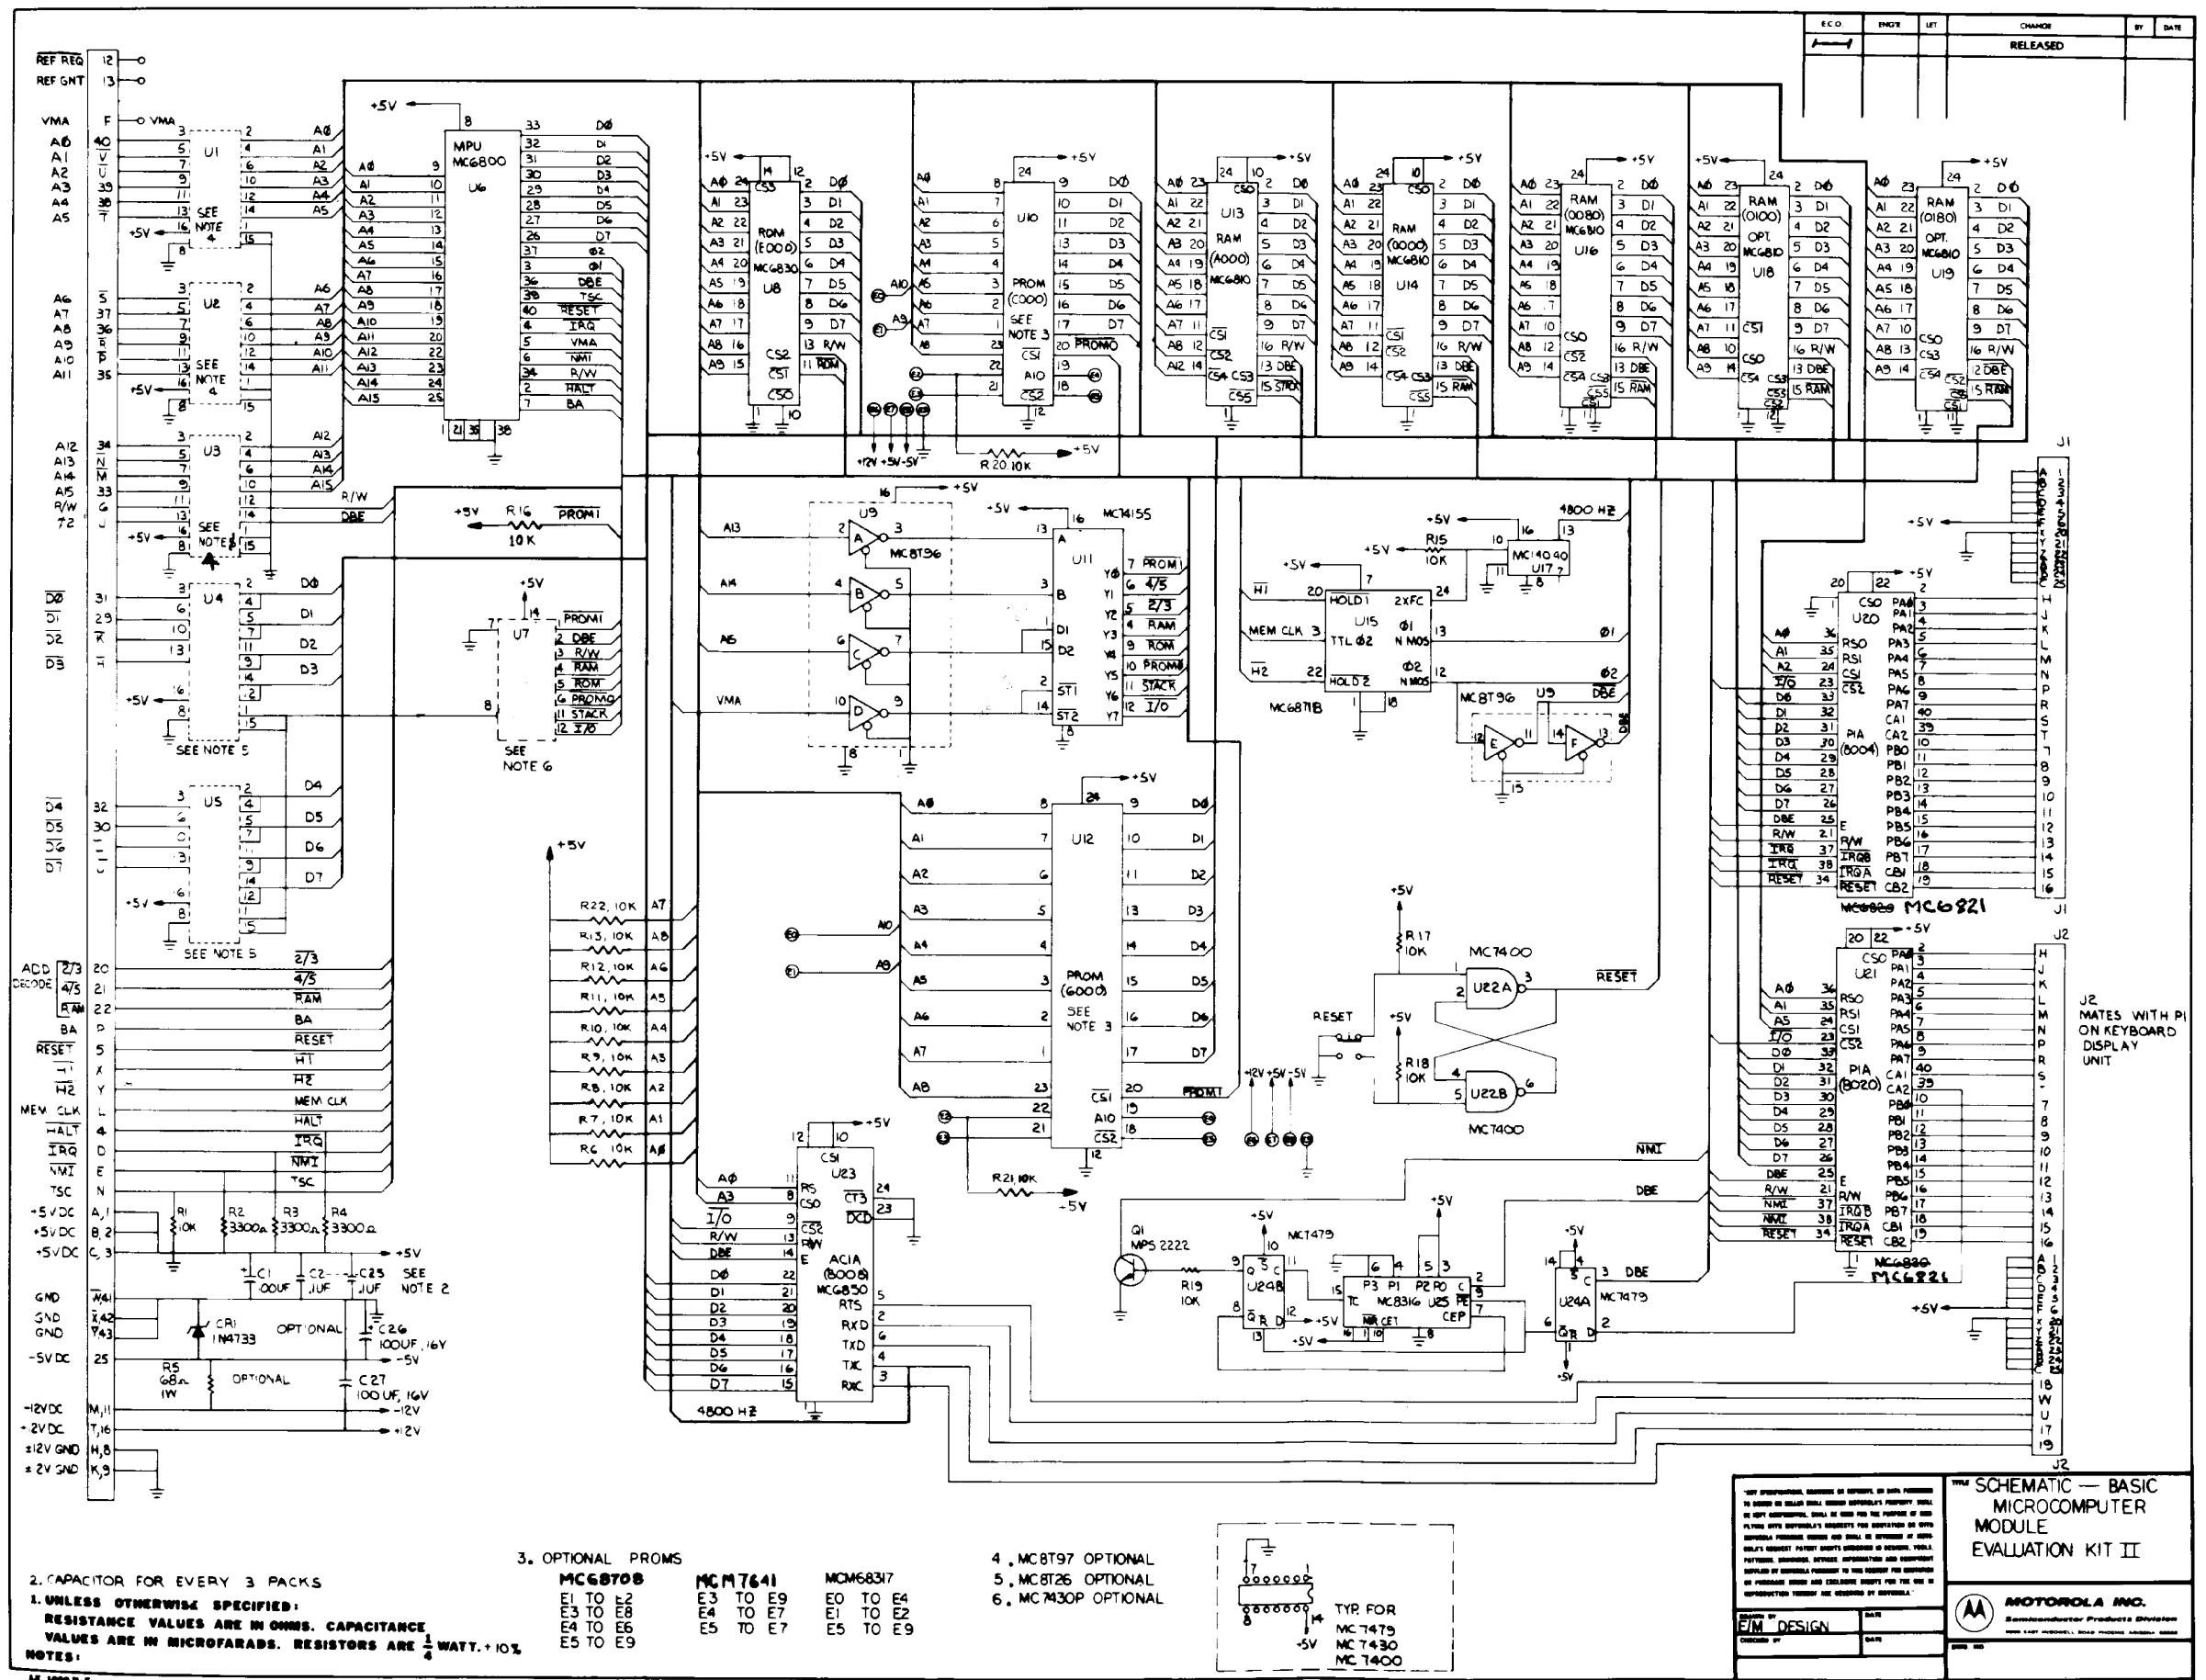
FIGURE A3-b. Microcomputer Module

A3-3

APPENDIX 4
POWER SUPPLY INFORMATION

RECTIFIER ASSEMBLY FOR REGULATED POWER SUPPLY

117 vac

12.6V rms

Stancor P-8358
Triad F-26X
or Equiv.

~ + −

MDA 970-1

1.0 Ω/5 W
Ohmite 2822
or Equiv.

+ 10 Vdc
2.5A–3.0A

3000μF
25WVdc
Sprague TVA1214
or Equiv.
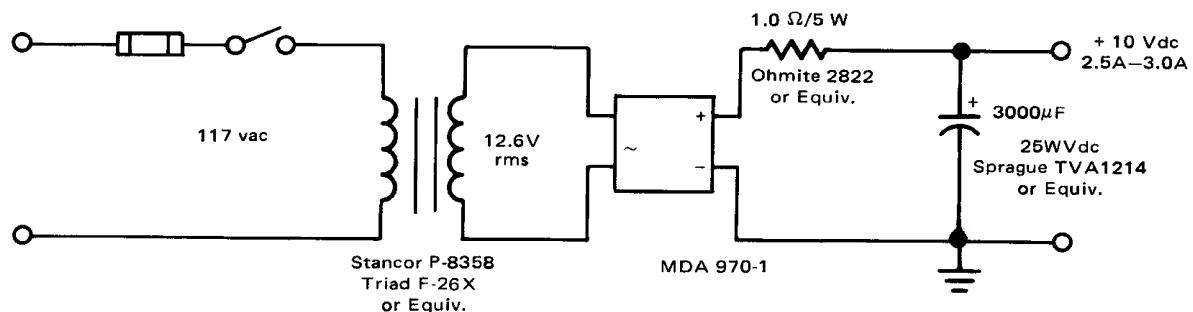
Note: Ground filter capacitor return lead near negative terminal of rectifier to minimize ground loops.

REGULATOR

V_{IN} Input
+10V

0.12Ω 5W
R_{SC}

MJ2955 or Equiv
Q1

2N6049 or Equiv

R
50Ω

1.0μF

IC1
MC7805CK

1

2

3

$I_{SC(Q1)}$

I_{SCTOT}

$I_{SC(IC1)}$

V_O
Output + 5V
2.5 A
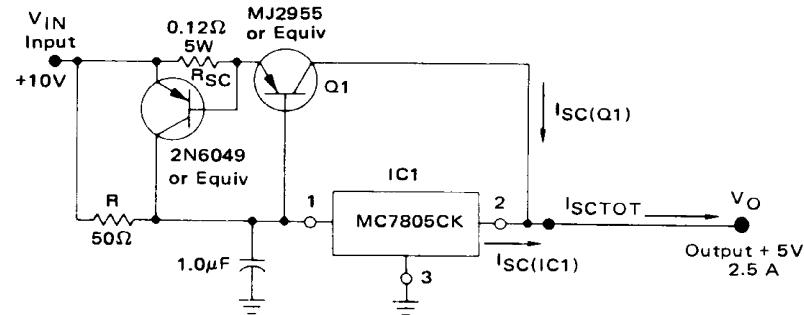
R: used to divert IC regulator bias current and determines at what output current level Q1 begins

conducting. $0 < R \leqslant \dfrac{V_{BEON(Q1)}}{I_{BIAS(IC1)}}$; $R_{SC} \approx \dfrac{0.6V}{I_{SC(Q1)}}$; $I_{SCTOT} = I_{SC(Q1)} + I_{SC(IC1)}$

Note: The Regulator Assembly is capable of supplying 5 A with 2.5°C/W and 1°C/W heatsink on IC1 and Q1 respectively ($T_A = 70°C$).

Refer to the Motorola VOLTAGE REGULATOR HANDBOOK for additional information.